
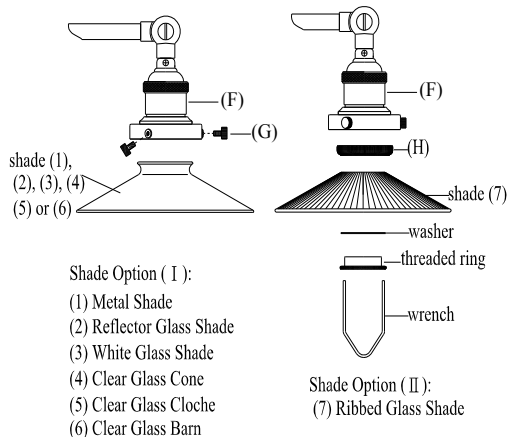


# RESTORATION HARDWARE

## 20<sup>TH</sup> CENTURY FILAMENT SCONCE

### PARTS ENCLOSED

- (A) Phillips screws (2)
- (B) Mounting Plate (1)
- (C) Outlet Box Screws (2)
- (D) Fixture Base (1)
- (E) Base Screws (2)
- (F) Shade Holder (1)
- (G) Thumbscrews (3)
- (H) Threaded collar (1)

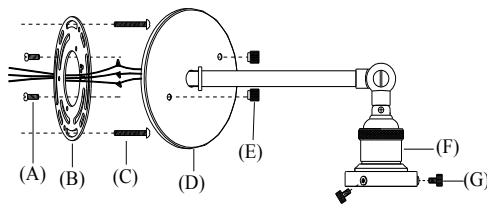

### IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.  
This fixture has been rated for up to one (1) 40-Watt maximum Type A bulb. To avoid the risk of fire, do not exceed the recommended wattage.

### WARNINGS:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. Do not connect electricity until your lamp is fully assembled.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.
4. Do not touch bulb when fixture is turned on or look directly at lit bulb.
5. Keep flammable materials away from lit bulb.

### TO ASSEMBLE:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!
2. Remove mounting plate (B) from fixture base (D) by unscrewing base screws (E) in counter-clockwise direction.
3. Gently pull the wire from wall outlet box and allow the wire to hang. Thread the wire through the center hole in mounting plate (B).
4. Attach the fixture ground wire and house ground wire (usually green or bare wire) to ceiling outlet box with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
5. Connect the neutral wire (ridges molded wire or white) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
6. Connect the hot wire (smooth wire or black) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
7. Attach mounting plate (B) to wall outlet box by aligning the holes and secure with outlet box screws (C).
8. Attach the fixture base (D) to mounting plate (B), letting the Philips screws (A) pass through the holes on fixture base (D) and secure with base screws (D).
9. Loosen the thumbscrews (G), insert lamp shade into shade holder (F) and secure with thumbscrews (G).
10. SHADE ASSEMBLY: (All shades are not included)  
Shade Option (I): When you using the shade (1), (2), (3), (4), (5) or (6) loosen thumbscrews (G) from shade holder (F), place shade (1), (2), (3), (4), (5) or (6) to shade holder (F) and secure with thumbscrews (G).  
Shade Option (II): If you want to use the shade (7), remove threaded collar (H), place shade cap and shade (7) to shade holder (F) and secure with threaded ring provide. (Keep the threaded collar (H) in case of changing back to Option (I) to use the other shades).
11. Insert the recommended bulb into socket.
12. Restore power to outlet box and check operation of fixture.
13. Assembly is complete.

### CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.