


RESTORATION HARDWARE

19th C. ENGLISH CLOVER LANTERN PENDANT

PARTS ENCLOSED

- (A) Wire Nut (2)
- (B) Cross Bar (1)
- (C) Mounting Screws (2)
- (D) Ceiling Loop (1)
- (E) Canopy (1)
- (F) Lock Collar (1)
- (G) Metal Ring (1)
- (H) Twist Tube (1)
- (J) Chain (4)
- (K) Fixture (1)
- (L) Glass (4)

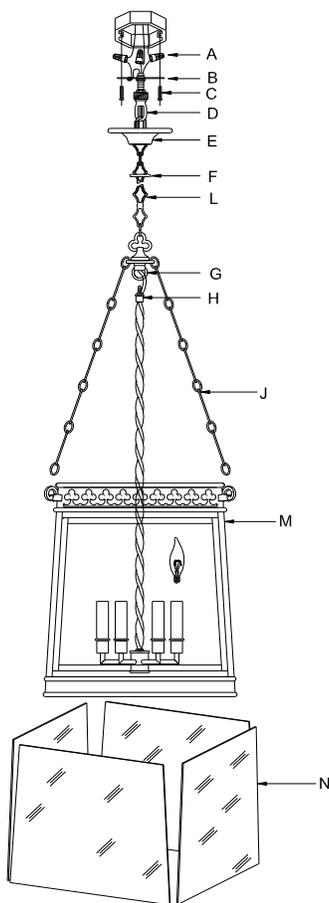

IMPORTANT SAFETY INSTRUCTIONS

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to six (6) 60-watt maximum E12 Type CA candelabra bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. Do not connect electricity until your lamp is fully assembled.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.
4. Do not touch bulb when fixture is turned on or look directly at lit bulb.
5. Keep flammable materials away from lit bulb.
6. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

TO ASSEMBLE

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!
2. Carefully remove all parts from the box and remove all plastic covering.
3. Install the crossbar (B) with ceiling loop (D) to outlet box by using mounting screws (C) provided.
4. Put canopy (E) to ceiling loop, and secure with lock collar (F)
5. Using the dimensions of the fixture as a guide, shorten the chain (L) as needed using a pair of chain pliers.
6. Take into consideration that you will use the chain end link to mount the chandelier once you have removed the excess chain.
7. Unscrew the threaded collar on the chain end link. Raise the fixture and attach the chain to the ceiling loop (D). Close the threaded collar to secure the chain.
8. Attach the twist grain tube (H) to the metal ring (G).
9. Attach the short chain (J) to the fixture (M).
10. Unwrap the wiring from the top of the fixture body. Weave the power supply cord and the ground wire through the chain (L).
11. When you reach the canopy and ceiling loop, measure the wires and cut. Be certain to leave enough to connect inside the canopy.
12. Strip the insulation back on the two power supply wires about 5/8".
13. Twist the power supply and ground wires together and push through the center hole in the ceiling loop.
14. Loosen the clock collar (F), let the canopy (E) slip down the chain carefully.
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
15. Connect the Ground (bare) fixture wire with the ground (usually bare) wire from your ceiling box using wire nut (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of outlet box.
IT IS IMPERATIVE THAT THE J-BOX IN YOUR HOME BE PROPERLY GROUNDED.
16. Connect the Neutral fixture wire with the Neutral (usually white) wire from your ceiling box using wire nut (A).
17. Connect the Hot (smooth edge, markings, or black) fixture wire with the Hot (usually black) wire from your outlet box using wire nut (A).
18. Tuck these wire connections neatly into ceiling loop (D) to secure.
19. Put canopy (E) to ceiling loop (D), and secure with lock collar (F).
20. Install the light bulbs (not included) into sockets.
21. Put the glass (N) into the fixture and use clip to locking it tight.
22. Installation is complete, turn on power at fuse or circuit breaker.

CARE INSTRUCTIONS

Wipe all surfaces with a soft dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.