


# RH

## PETITE CANDLESTICK LINEN SHADE SCONCE

### PARTS ENCLOSED

- (A) Plastic Anchors (2)
- (B) Mounting Plate (1)
- (C) Mounting Screws (2)
- (D) Fixture Base (1)
- (E) Set Screws (4)
- (F) Screwdriver (1)
- (G) Socket Ring (1)
- (H) Socket (1)

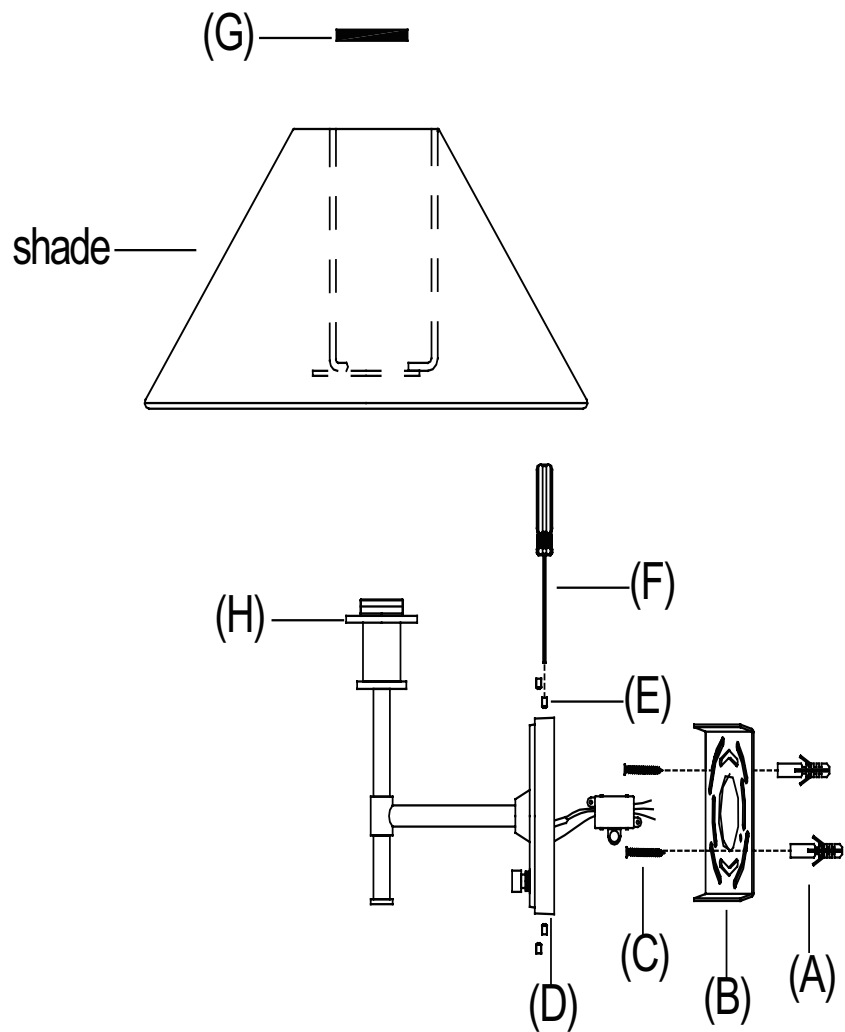

## IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for one (1) E14 60-watt maximum Type B lightbulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

## WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

## ASSEMBLY &amp; INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Remove Mounting Plate (B) from Fixture Base (D) by removing Set Screws (E) using a Screwdriver (F).
3. Place Mounting Plate (B) on the wall. Using it as a template, mark points with a pencil for both mounting slots. Remove mounting plate (B).

## ASSEMBLY &amp; INSTALLATION CONT.

4. Drill small holes on the pencil marks; the holes should be big enough to accommodate Plastic Anchors (A). Push Plastic Anchors (A) into the holes.
5. Affix Mounting Plate (B) to the wall outlet box. Insert Mounting Screws (C) into Plastic Anchors (A) to secure Mounting Plate (B) to the wall.
6. Connect the ground outlet wire (usually green) to ground (green) side of terminal block by loosening set screw, inserting outlet wire, and tightening set screw. The terminal block is attached at backside of fixture base (D).
7. Connect neutral outlet wire (usually blue) to neutral (blue) side of terminal block by loosening set screw, inserting outlet wire, and tightening set screw. The terminal block is attached at backside of Fixture Base (D).
8. Repeat the procedure with the hot outlet wire (brown) to hot side of terminal block. Always make sure that no wire strands are left outside the terminal block. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
9. Attach Fixture Base (D) to the affixed Mounting Plate (B) and secure with Set Screws (E). Tighten using Screwdriver (F).
10. Remove Socket Ring (G) from Socket (H). Attach shade (packed separately) onto Socket (H) and secure with Socket Ring (G).
11. Insert the recommended bulb (not included) into the socket.
12. Restore power to outlet box and check operation of fixture.
13. Assembly is complete.

## CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.