












RESTORATION HARDWARE

Thank you for purchasing Restoration Hardware Lighting. Our assortment is crafted with the highest quality details in mind and each collection is clad in one of our signature finish options. Each item's surface is sealed which eliminates the need for polishing and ensures the lasting brilliance of your piece for years to come.

PARTS ENCLOSED

ITEM	DIAGRAM	DESCRIPTION	QTY.
(A)		OUTLET BOX(not Included) (100 LB. MIN. FIXTURE RATED)	1
(B)		Ceiling Hook	1
(C)		MOUNTING SCREWS	2
(D)		COLLAR	1
(E1)		CANOPY	1
(E2)			1
(F)		HANG STRAIGHT	1
(G)		QUICK LINK	2
(H)		CHAIN	1
(I)		WIRE NUT	3
(J)		Candle Sleeve	9
(K)		Body	1

IMPORTANT SAFETY INSTRUCTIONS:

We recommend installation by a certified electrician.

This fixture has been rated for nine (9) 25-watt maximum E12 standard bulb
To avoid the risk of fire, do not exceed the recommended wattage.


WARNINGS:

All wires are connected. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result. Do not connect electricity until your lamp is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off the lamp and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.

To ASSEMBLE:

- Carefully remove all parts from the box and remove all plastic covering.
- Turn OFF power to the junction box where the lamp will be installed.
- Untight the bolt of the hang straight (F) and remove the collar (D) from the hang straight (F) by unscrew it. Then insert collar (D) into canopy (E1) and re-attach collar (D) to the hang straight (F). Tight the bolt of the hang straight (F)
- Unlock the quick link (G) at the opposite end of the chain (H) to attach to Foucault body.
- Attach the ceiling hook (B) to the ceiling with mounting screws (C).

FOUCAULT'S IRON LARGE ORB CHANDELIER

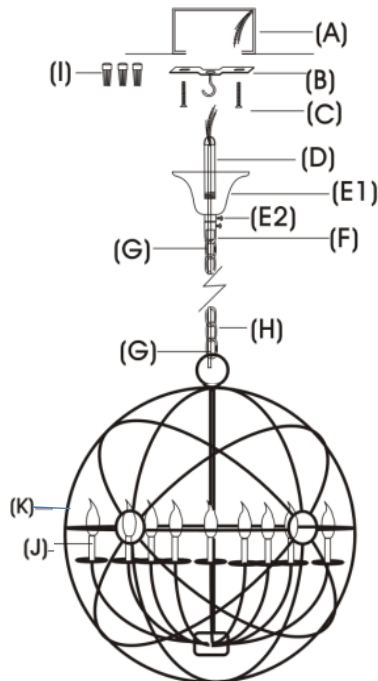

- Attach end of the collar (D) to the ceiling hook
- Connect the ground wire from the fixture to the ground junction box wire (A) (Usually green or bare wire) and wrap the connection with electrical tape. Connect the hot wire to the hot junction box wire (A) (usually black or smooth) with a plastic wire nut (I) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (A) (usually white or ribbed) with a plastic wire nut (I) and wrap the connection with electrical tape.
- Move up the canopy (E1) to the ceiling, then fasten the bolt (E2)
- Locate the candle sleeve (J) onto the lampholder
- Fasten the light bulbs to the lampholder.
- Restore power to the junction box and test lamp fixture.
- Installation is completed.

CARE INSTRUCTIONS:

- Make sure that the power is turned off and bulb has cooled before handling.
- Do not use corrosive cleaners.
- The ceiling must have the capacity of five times the weight of the light
(For this light : $5 \times 6.74\text{kg} = 33.7\text{kg}$) is required.
- The cable/cord of this light cannot be replaced:
if the cable is damaged, do not use the light.
- For indoor use only.