


RESTORATION HARDWARE

MARAIS LINEAR WALL SCONCE

PARTS ENCLOSED:

- | | |
|--------------------------|------------------------------|
| (A) Mounting Plate | (I) Socket |
| (B) Threaded Tube | (J) Wire Nuts (x3) |
| (C) Support Holes | (K) Mounting Screws (x2) |
| (D) Mounting Screws (x2) | (L) Wall Anchors (x2) |
| (E) Backplate | (M) 40 Watt Maximum T14 Bulb |
| (F) Glass Rods | |
| (G) Shade Frame | |
| (H) Decorative Nuts (x4) | |

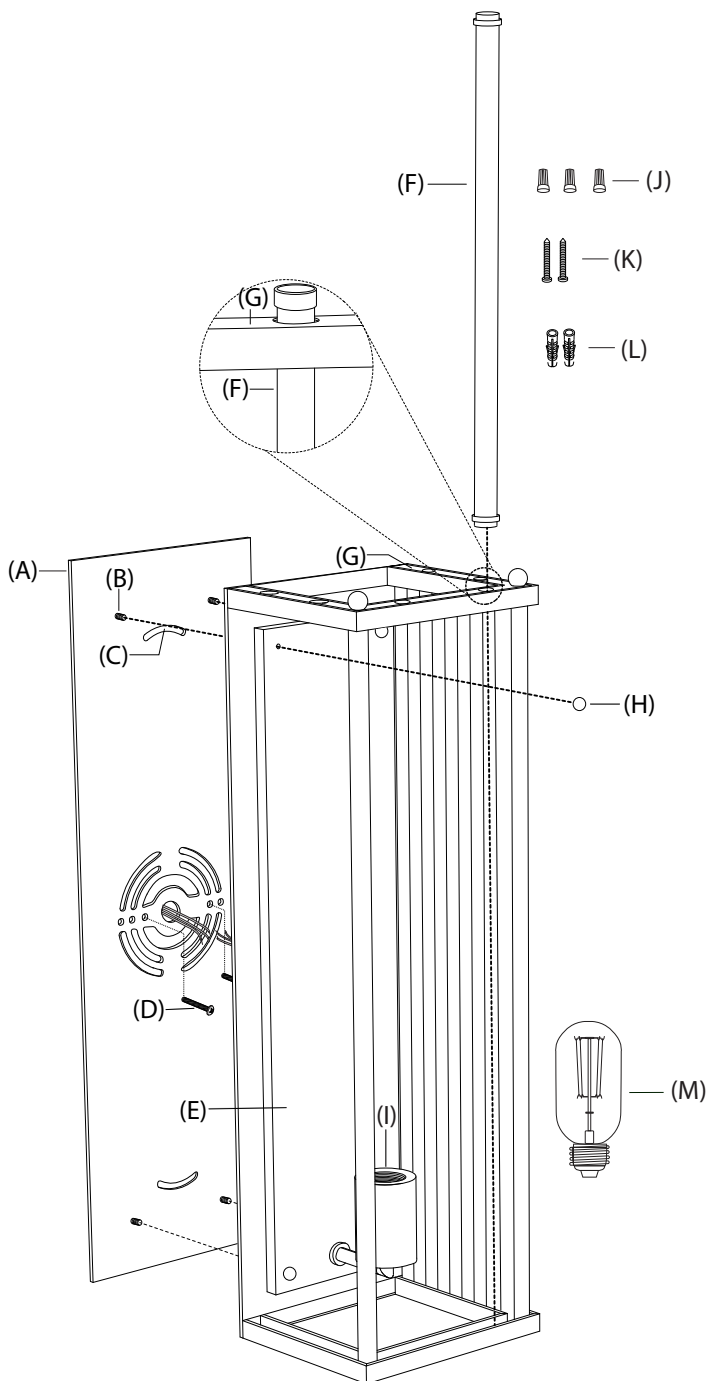

IMPORTANT SAFETY INSTRUCTIONS:

1. These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the assembly and installation of this lighting fixture.
2. We strongly recommend that a professional electrician install all direct wire fixtures.
3. This product must be installed in accordance with the applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.
4. This lighting fixture is UL rated for dry locations.
5. This fixture has been rated for up to one (1) 60-watt maximum, Type A, medium base light bulb. To avoid the risk of fire, do not exceed the recommended wattage.
6. If any special control devices are used with this fixture, follow the instructions carefully to assure full compliance with N.E.C. requirements. If there are any questions contact a qualified electrical contractor.

WARNINGS:

1. To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulbs.
2. Do not touch bulbs when fixture is turned on. Do not look directly at lit bulbs.
3. Keep flammable materials away from lit bulbs.

TO ASSEMBLE:

1. SHUT OFF MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
2. Remove all parts from carton and discard packing materials. Place the parts on a protected work surface.
3. Remove mounting plate (A) from backplate (E) by removing decorative nuts (H). Set nuts (H) and backplate (E) aside.
4. Place the mounting plate (A) against the mounting surface so it is aligned with the outlet box. Once aligned, check to make sure that the position of the mounting plate is straight. When the proper placement has been confirmed, use a pencil to mark the locations of the mounting plate support holes (C) onto the mounting surface.
5. Set the mounting plate (A) aside and drill small holes at the marked locations. Holes should be sized so anchors (L), provided, fit securely inside.
6. Push anchors (L) into holes.
7. Carefully pull the wiring from the wall outlet box. Thread the wires through the center hole in mounting plate (A).
8. Affix mounting plate (A) to outlet box with mounting screws (D) provided.
9. For additional support, thread mounting screws (K) through holes (C) and into wall anchors (L).
10. Lift fixture to mounting plate (A) and make proper electrical connections described in steps 11-13. A LICENSED ELECTRICIAN IS RECOMMENDED.
11. Attach ground wire from the fixture (green or copper in color) to the ground wire in outlet box. Fasten wires together with wire nut (J) and tightly wrap connection with electrical tape.
12. Attach hot wire from fixture (black in color, or smooth side of wire) to hot wire from ceiling outlet box. Fasten wires together with wire nut (J) and tightly wrap connection with electrical tape.
13. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from ceiling outlet box. Fasten wires together with wire nut (J) and tightly wrap connection with electrical tape.
14. Gently push wire connections back into outlet box. Place backplate (E) over mounting plate (A). Thread decorative nuts (H) onto threaded tubes (B) to secure backplate (E) to the mounting surface.
15. Assemble shade by inserting glass rods (F) into shade frame (G) via holes located around the top of frame. Guide rods through the hole and down into the trough at the bottom of the shade frame. Slide the glass rod (F) to the left or right until it stops. Continue inserting rods and gently pushing them into place around the frame until it is full and no more rods will fit. *NOTE: do not remove rubber spacers on glass rods as this will cause an incorrect fit.
16. Install one 40W MAX. Type T14, medium base bulb (M) (included) into the socket (I).
17. Reconnect main electrical supply at the fuse box/circuit breaker and test fixture.

CARE INSTRUCTIONS:

1. Wipe clean with a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.