


# RESTORATION HARDWARE

Thank you for purchasing Restoration Hardware Lighting. Our assortment is crafted with the highest quality details in mind and each collection is clad in one of our signature finish options. Each item's surface is sealed which eliminates the need for polishing and ensures the lasting brilliance of your piece for years to come.

## PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Mounting Screws (2)
- (C) Base Screws (2)
- (D) Fixture Base (1)
- (E) Metal anchor (1)
- (F) Rod Part (1)
- (G) Set Screw (1)
- (H) Rod (1)
- (J) Threaded Socket (1)
- (K) Socket Ring (1)
- (L) Light bulbs (2)

## LORRAINE ARCHITECTURAL RAILING SCONCE

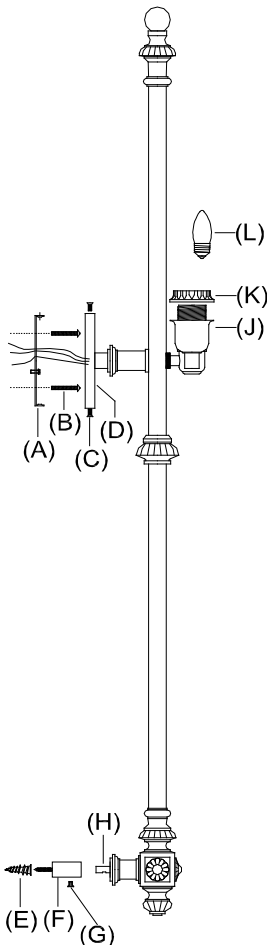

## IMPORTANT SAFETY INSTRUCTION:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to two (2) 25-watt maximum Type B TORPEDO bulbs (included). To avoid the risk of fire, do not exceed the recommended wattage.

## WARNINGS:

1. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.
2. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
3. Do not connect electricity until your lamp is fully assembled.
4. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.
5. Do not touch bulb when fixture is turned on or look directly at lit bulb.
6. Keep flammable materials away from lit bulb.
7. Installing this sconce requires installing a special outlet box. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

## TO ASSEMBLE:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!
2. Carefully remove all parts from the box and remove all plastic covering.
3. Remove mounting plate (A) from fixture base (D) by removing base screws (C).
4. Affix mounting plate (A) to wall outlet box with mounting screws (B) provided.
5. Place fixture base (D) onto the mounting plate (A). Make sure the whole fixture base is vertical, mark the screw location of rod part (F) on the wall. Remove fixture base (D).
6. Drill small holes on each point location on the wall, each hole should be large enough to accommodate the metal anchor (E). Push metal anchor (E) into the holes on the wall.
7. Remove rod part (F) from rod (H) by loosen set screw (G), install rod part (F) into metal anchor (E).
8. Attach the fixture ground wire and house ground wire (usually green or bare wire) to mounting plate with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
9. Connect the neutral wire (white) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
10. Repeat the procedure with the hot (black) wire to hot (usually black) outlet wire. Always make sure that no wire strands are left outside of the connections. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
11. Attach fixture base (D) to mounting plate (A) and tighten with base screws (C).
12. Insert "tongue" section of rod (H) rod part (F) and secure with set screw (G).
13. Remove socket ring (J) from top of socket (I). Attach lamp shade (not included) to the threaded socket (I) and secure with socket ring (J).
14. Insert light bulbs (L) into sockets.
15. Restore power to outlet box and check operation of fixture.
16. Assembly is complete.

## CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.