


RESTORATION HARDWARE

FLUTED COLUMN FLUSHMOUNT

PARTS ENCLOSED

- (A) Mounting plate (1)
- (B) Mounting screws (2)
- (C) Fixture base (1)
- (D) Cap nuts (2)
- (E) Base screws (4)
- (F) Fixture body (1)

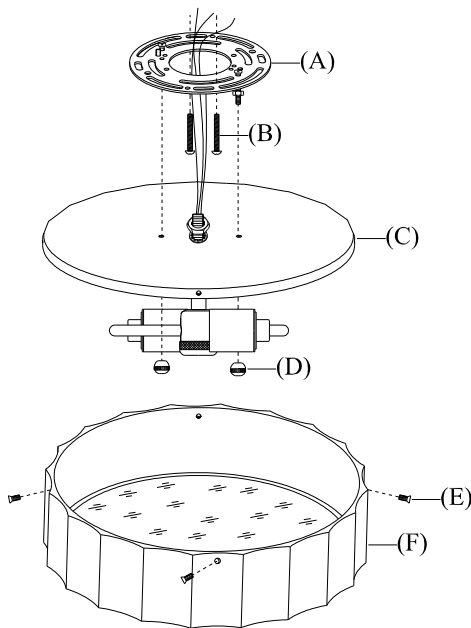

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to two (2) 60-watt maximum Type B TORPEDO light bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

1. All wires are connected.
2. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
3. Do not connect electricity until your lamp is fully assembled.
4. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing light bulb.
5. Do not touch bulb when fixture is turned on or look directly at lit bulb.
6. Keep flammable materials away from lit bulb.
7. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

TO ASSEMBLE:

1. Carefully remove all parts from the box.
2. Remove mounting plate (A) from fixture base (C) by unscrewing cap nuts (D).
3. Affix mounting plate (A) onto ceiling outlet box and secure with mounting screws (B) provided.
4. Gently pull the wires from the ceiling outlet and allow the wires to hang. Thread the wires through the center hole in mounting plate (A).
5. Connect both hot wires from the fixture (BLACK) to the hot wire from ceiling outlet box (usually BLACK). Fasten them together with a plastic wire connector provided and wrap connection with electrical tape.
6. Repeat this procedure for the WHITE neutral wires from the light fixture to the wire from ceiling outlet box (usually WHITE).
7. Connect ground wire from the light fixture (bare copper) to ground wire from ceiling outlet box (usually green or copper in color).
8. Attach fixture base (C) to affixed mounting plate (A), letting rods on mounting plate (A) pass through the holes on fixture base (C) and secure with cap nuts (D).
9. Insert the recommended bulbs into the sockets.
10. Loosen base screws (E) from fixture base (C).
11. Attach fixture body (F) to fixture base (C) and secure with base screws (E).
12. Restore power to outlet box and check operation of fixture.
13. Assembly is complete.

CARE INSTRUCTIONS:

Avoid the use of all polishers, cleaners, and abrasives, as they will damage the finish of your lamp. To remove dust or fingerprints, wipe gently with a soft, clean cloth.