


RESTORATION HARDWARE

EDISON GLASS PENDANT

PARTS ENCLOSED

- (A) Mounting plate (1)
- (B) Mounting screws (2)
- (C) Fixture base (1)
- (D) Cap nuts (2)
- (E) Thumbscrews (3)
- (F) Light bulb (1)
- (G) Glass shade (1)

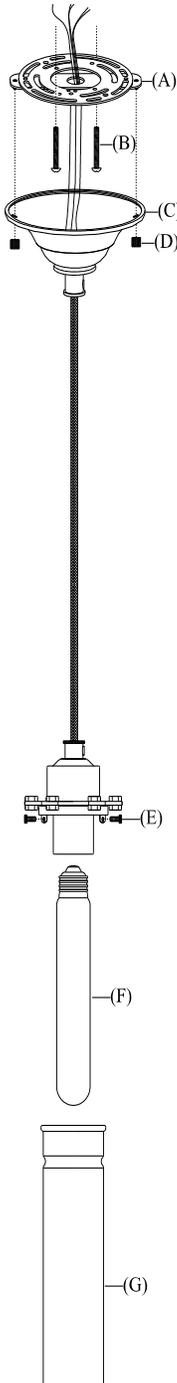

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to four (1) 40-watt maximum Type T standard bulb (F) (included) OR (1) 13W Compact Fluorescent bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

1. All wires are connected.
2. When unpacking, be careful not to pull with wires as a bad connection may result.
3. Do not connect electricity until your fixture is fully assembled.
4. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug fixture and allow it to cool prior to replacing light bulb.
5. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.
6. Keep flammable materials away from lit bulb.
7. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the chandelier will be installed.
3. Remove mounting plate (A) from fixture base (C) by unscrewing cap nuts (D).
4. Attach mounting plate (A) to mounting outlet box and secure with mounting screws (B) provided.
5. Attach the fixture ground wire and house ground wire (green) to ceiling outlet box with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
6. Connect the neutral wire (white) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
7. Connect the hot wire (black) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
8. Tuck these wire connections neatly into the ceiling outlet box.
9. Attach fixture base (C) to mounting plate (A), letting the rods of mounting plate (A) pass through the holes of fixture base (C), and tighten by re-place cap nuts (D). (See left illustration)
10. Insert recommended bulb into threaded socket.
11. Remove thumbscrews (E) from shade holder, attach glass shade (G) to shade holder and secure with thumbscrews (E). NOTE: DO NOT OVER TIGHTEN OTHERWISE IT WILL DAMAGE THE GLASS SHADE.
12. Restore power to the junction box and test the pendant fixture.
13. Assembly is complete.

CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.