

RESTORATION HARDWARE

Thank you for purchasing Restoration Hardware Lighting. Our assortment is crafted with the highest quality details in mind and each collection is clad in one of our signature finish options. Each item's surface is sealed which eliminates the need for polishing and ensures the lasting brilliance of your piece for years to come.

PARTS ENCLOSED:

- (A) CHAIN FRAME
- (B) CEILING PLATE
- (C) CROSSBAR WITH THREADED TUBE
- (D) BOTTOM PLATE
- (E) CAP FOR THREADED TUBE OF CROSSBAR

IMPORTANT SAFETY INSTRUCTIONS :

- These instructions are provided for your safety. It is very important that they are properly read **completely** before beginning the installation of your fixture.


DIRECT WIRE FIXTURE.

WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

WARNINGS :

Turn off power (unplug from the wall outlet) before replacing the bulb, making sure, the bulb had sufficient time to cool down. DO NOT subject the lamp to any shock while lit as shattering of lamp may result.

19TH C. FRENCH EMPIRE CHAINMAIL DEMILUNE FLUSHMOUNT 12" 18" 24"

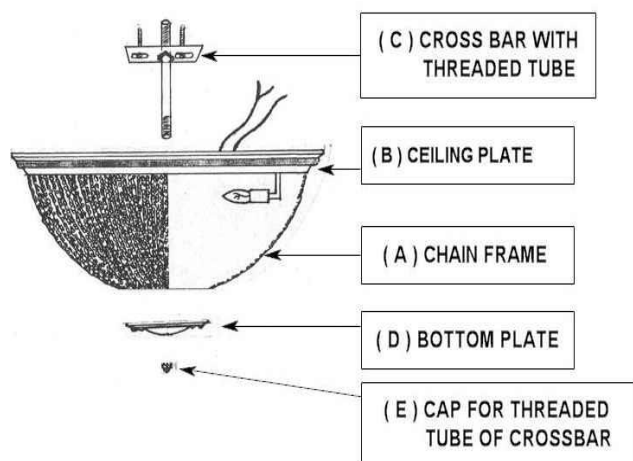

TO ASSEMBLE :

1. Shut off electrical supply at main fuse box / circuit breaker.
2. Remove all parts from carton. Do not throw away any parts.
3. Un-screw the **Cross Bar with threaded tube (C)**. Affix the **Cross Bar with threaded tube (C)** directly to the Junction Box using screws provided.
4. Unscrew the **Cap (E)** and take away the **Bottom Plate (D)** and Threaded Tube of the Cross Bar from the **Ceiling Plate (B)**.
5. Screw the Threaded Tube on the Cross Bar.
6. Assemble the wires at the back of the **Ceiling Plate (B)**. Connect the grounding wire (silver colored, un-laminated) to the grounding screw in the **Cross Bar (C)**. Connect the wires from the Flushmount to the wires in the junction box, neutral to neutral, live wire to live wire, with plastic wire connectors (not provided) and wrap the wire connector with electrical insulation tape.
7. Slide the complete Chain Flushmount unit by sliding the threaded tube (of the Cross Bar) in the middle hole of the Ceiling Plate (B) and then place the Bottom Plate (D) over the Threaded Tube (as shown in the Line Diagram on Left) and screw the Cap (E) on the visible end of the Threaded Tube after placing the Bottom Plate (D).
8. Place **Type CA light bulbs (not provided)** into the socket of the Flushmount by sliding the Chains of the **Chain Frame (A)** and then re-arrange the Chains back to their place.
9. Installation is complete.

CARE INSTRUCTIONS:

To clean, use a soft cloth only. Do not use any chemical or abrasive cleaners.