
MORAVIAN STAR LARGE PENDANT

PARTS ENCLOSED

- (A) Wire Nuts (3)
- (B) Threaded Nipple Pipe (1)
- (C) Ceiling Loop (1)
- (D) Canopy (1)
- (E) Lock Collar (1)
- (F) Carabiners (2)
- (G) Chain (1)
- (H) Top Ring (1)
- (J) Panel Door (1)
- (K) Metal Frame (1)



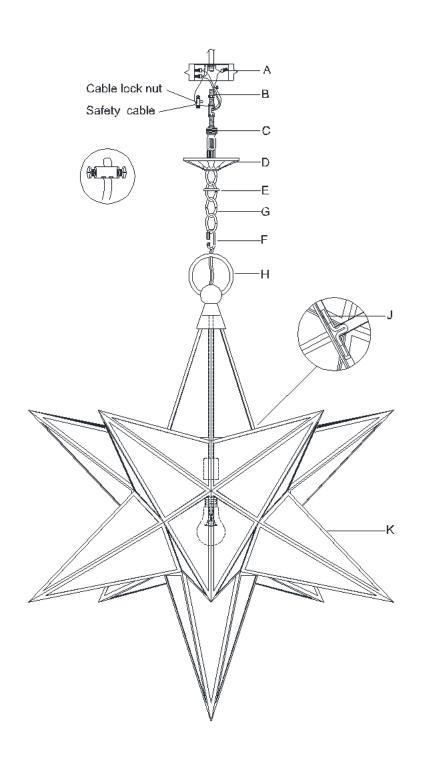

MORAVIAN STAR LARGE PENDANT

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to three (3) 75-Watt maximum Type A standard (candelabra) incandescent light bulbs (not included) or three (3) 18-Watt compact fluorescent light bulbs (not included) or three (3) 9-Watt LED light bulbs (not included). 40-Watt Type A standard light bulbs are included. To avoid the risk of fire, DO NOT EXCEED THE RECOMMENDED LAMP WATTAGE.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.

WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.



Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

- 1. Carefully remove all parts from the box.
- 2. A 1/4" threaded nipple must be installed in your outlet box. Then install the Threaded Nipple Pipe (B) into the outlet box.
- Unscrew the threaded collar on the Carabiner (F) and attach
 it to the Top Ring (H). Close the threaded collar to secure the
 fixture body.

ASSEMBLY & INSTALLATION CONT.

- 4. Let the Canopy (D) and Lock Collar (E) go through the Chain (G).
- 5. With the fixture dimension as a guide, shorten the Chain (G) as needed using a pair of chain pliers.
- Unscrew the threaded collar on the other Carabiner (F). Raise the fixture, then attach Carabiner (F) to the Ceiling Loop (C). Close the threaded collar to secure.
- 7. Unwrap the wiring from the top of the fixture body. Weave the power supply cord and the ground wire through the Chain (G).
- When you reach the canopy and ceiling loop, measure the wires and then cut. Be certain to leave enough to connect inside of the outlet box.
- 9. Strip the insulation back on the two power supply wires about 5/8".
- 10. Twist the power supply and ground wire together and push through the center hole of the Ceiling Loop (C).
- 11. Connect the fixture ground (bare) wire with the ground wire from the outlet box using Wire Nut (A). If your house does not have a ground wire, then attach this wire to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
- 12. Connect the fixture neutral wire (ribbed, no markings) with the neutral wire from the outlet box using Wire Nut (A).
- Connect the fixture hot wire (smooth edge, markings) wire with the hot wire from the outlet box using Wire Nut (A). DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
- 14. Tuck these wire connections neatly into the outlet box to secure.
- Attach Canopy (D) to Ceiling Loop (C) and secure with Lock Collar (E).
- 16. Open the door handle, insert bulbs (not included) into the sockets, then close it.
- 17. Installation is complete. Turn on power at fuse or circuit breaker.

CARE INSTRUCTIONS

Do not use polishes or cleaners on your lamp. Just wipe clean with a soft cloth.