


## TORCHE DE VERRE LINEAR CHANDELIER 54"

## PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Canopy (1)
- (C) Mounting Loops (2)
- (D) Canopy Screws (6)
- (E) Hanging Loops (2)
- (F) 18" Rods (4)
- (G) 12" Rods (4)
- (H) 6" Rods (4)
- (J) Connective Tubes (10)
- (K) Glass Tubes (12)
- (L) Bulbs (12)
- (M) Wrench (1)
- (N) Socket Rings (12)
- (O) Shades (12)
- (P) Sockets (12)
- (Q) Connective Rods (2)

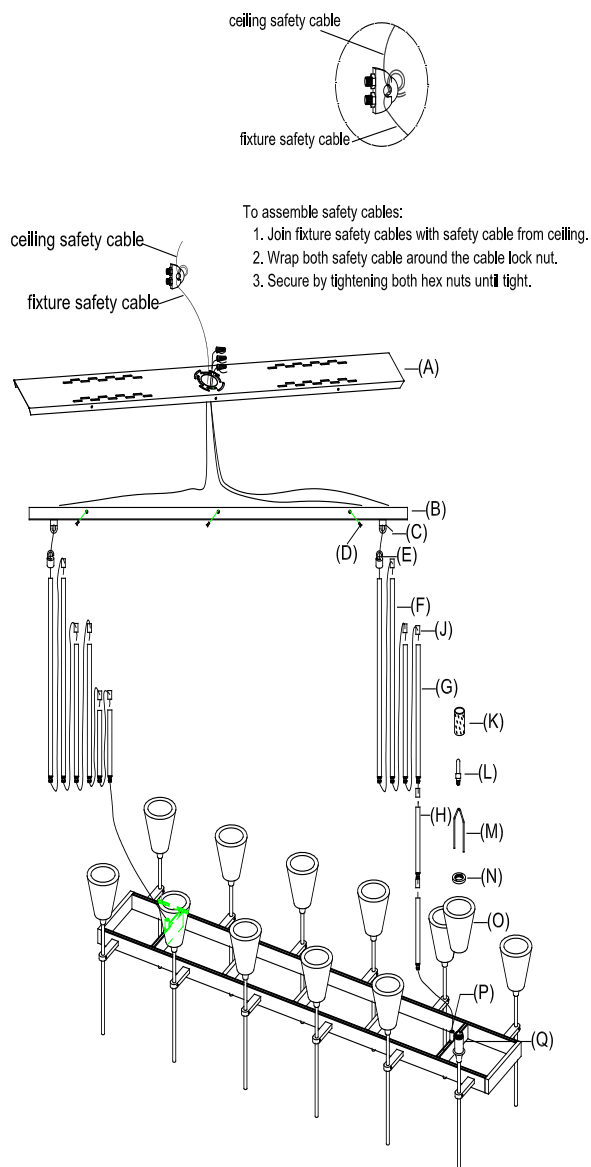

## IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to twelve (12) 40-Watt maximum Type T3 bulbs (L) (included) or twelve (12) 9-Watt compact fluorescent light bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

## WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.



**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

## ASSEMBLY &amp; INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic covering. CAUTION: Setting this fixture upright on a hard surface can easily damage the bottom finials.
2. Determine the hanging length of pendant. Connect the light fixture to some or all Connection Rods (H) (J) (K) and Connective Tubes (G) according to the height needed.

## ASSEMBLY &amp; INSTALLATION CONT.

3. Thread Hanging Loop (F) onto the inner connection rod of the top cord cover.
4. Hook Hanging Loop (F) to Mounting Loop (E).
5. Unscrewing Canopy Ring (C) from Mounting Loop (E); slide Canopy ring (C) and Canopy (D) on the Lamp Pole (H).
6. Place Mounting Strap (A) to ceiling outlet box with Mounting Screws (B).
7. Thread Mounting Loop (E) to center nipple of Mounting Strap (A).
8. Feed wires through the Connection Rods, Hanging Loop (F), Canopy (D) and Mounting Loop (E).
9. Carefully inspect the lantern's two fixture wires. One has very fine ridges molded into the plastic covering – this is the neutral wire. The second wire's covering is smooth – this is the hot wire. The bare wire is the ground wire.
10. Connect the ground wire from the fixture with the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the ground wire from the fixture to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
11. Connect the neutral wire from your fixture with the neutral wire (WHITE) from your ceiling box using a wire nut.
12. Connect the hot wire from your fixture with the hot wire (BLACK) from your outlet box using a wire nut. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
13. Slip Canopy (D) to the affixed Mounting Strap (A) and secure with Canopy Ring (C).
14. Remove Socket Ring (O) from threaded Socket (L); attach Glass Shade (N) to threaded Socket (L) and secure with Socket Ring (O). Tighten with Wrench (P).
15. Insert Bulb (M) into Socket (L).
16. Thread Glass Tube (Q) onto Socket (L).
17. Assembly is complete.

## CARE INSTRUCTIONS

Do not use polishes or cleaners on your lamp. Just wipe clean with a soft cloth.