


RESTORATION HARDWARE

BISTRO DOUBLE WALL SCNCE

PARTS ENCLOSED:

- | | |
|----------------------------|-----------------------|
| (A) Mounting Plate | (E) Shade Screws |
| (B) Mounting Screws (X2) | (F) Socket Cups (X2) |
| (C) Back Plate | (G) Glass Shades (X2) |
| (D) Back Plate Screws (X4) | (H) Wire Nuts (X3) |

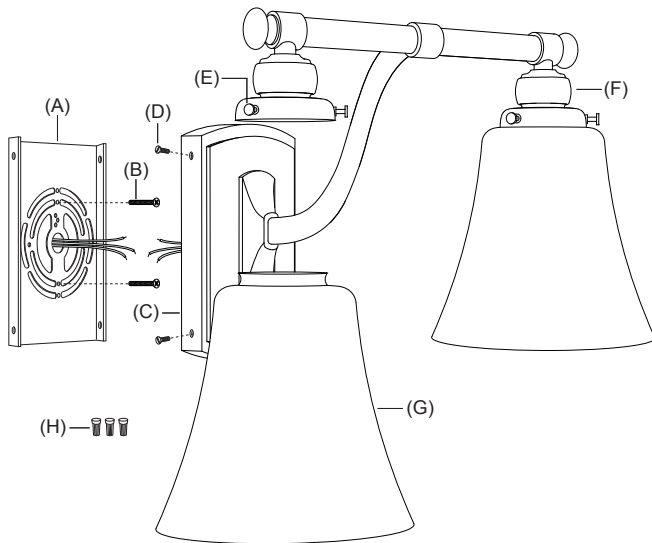

IMPORTANT SAFETY INSTRUCTIONS:

1. These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the assembly and installation of this lighting fixture.
2. We strongly recommend that a professional electrician install all direct wire fixtures.
3. This product must be installed in accordance with the applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.
4. The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with ground wire or equivalent protection system).
5. This fixture has been rated for up to two (2) 60-watt maximum, TYPE A, medium base light bulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

1. To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulbs.
2. Do not touch bulbs when fixture is turned on. Do not look directly at lit bulbs.
3. Keep flammable materials away from lit bulbs.

TO ASSEMBLE:

1. SHUT OFF THE ELECTRICAL SUPPLY AT THE MAIN FUSE BOX/CIRCUIT BREAKER.
2. Remove mounting plate (A) from back plate (C) by removing back plate screws (D). Set screws (D) aside.
3. Carefully pull the wiring from the wall outlet box and allow the wires to hang outside the box. Thread the wires through the center hole in the mounting plate (A).
4. Affix mounting plate (A) to the wall outlet box with mounting screws (B). Make sure mounting plate (A) is in a level position before proceeding to the next step.
5. Lift fixture to mounting plate and make proper electrical connections described in steps 6 - 8. A LICENSED ELECTRICIAN IS RECOMMENDED.
6. Connect ground (green or silver in color) wire from fixture to ground wire in the outlet box. Fasten wires together with wire nut (H) and tightly wrap the connection with electrical tape.
7. Attach hot wire from fixture (black in color or smooth side of wire) to hot wire from outlet box. Fasten wires together with wire nut (H) and tightly wrap connection with electrical tape.
8. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from outlet box. Fasten wires together with wire nut (H) and tightly wrap connection with electrical tape.
9. Carefully push wire connections back into wall outlet box. Slide back plate (C) over mounting plate (A).
10. Thread back plate screws (D) into vacant holes on the sides of back plate (C) to secure the fixture to the mounting surface.
11. To install shades, loosen shade screws (E) but do not remove them completely from socket cup (F). Insert the neck of glass shade (G) into socket cup (F) and tighten shade screws (E) to hold the shade in place. Repeat step for remaining shades.
NOTE: Do not over tighten screws (E) as doing so could break the glass shades.
12. Insert two (2) 60-watt maximum, TYPE A, medium base light bulbs into the sockets.
13. Reconnect main the electrical supply at the fuse box/circuit breaker and test the fixture.

CARE INSTRUCTIONS:

1. Wipe clean with a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.