


RESTORATION HARDWARE

BLAIR PENDANT

PARTS ENCLOSED

- (A) Mounting Strap
- (B) Mounting Screws (2)
- (C) Mounting Loop
- (D) Nipple
- (E) Canopy
- (F) Canopy Ring
- (G) Upper Pole
- (H) Lower Pole
- (J) Connection Rod

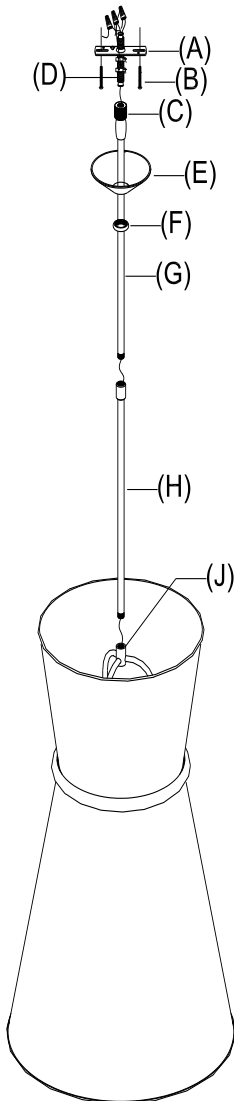

IMPORTANT SAFETY INSTRUCTIONS

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to one (1) 60-watt maximum Type A standard light bulbs (not included) or one (1) 13-watt compact fluorescent light bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

1. All wires are connected.
2. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
3. Do not connect electricity until your lamp is fully assembled.
4. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing light bulb.
5. Do not touch bulb when fixture is turned on or look directly at lit bulb.
6. Keep flammable materials away from lit bulb.
7. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

TO ASSEMBLE

1. Carefully remove all parts from the box and remove all plastic covering.
2. Screw the bottom nipple of Lower Pole (H) into the top opening of Connective Rod (J) by turning clockwise direction until tight.
3. Screw the bottom nipple of Upper Pole (G) into the top opening of Lower Pole (H) by turning clockwise direction until tight.
4. Unscrewing Canopy ring (F), slide Canopy Ring (F) and Canopy (E) onto Upper Pole (G).
5. Feed wires through Lower Pole (H), Upper Pole (G) and come out from the top of Mounting Loop (C).
6. Attach Mounting Strap (A) to ceiling outlet and secure with Mounting Screws (B) provided.
7. Attach Mounting Loop (C) to the Nipple (D) in Mounting Strap (A).
8. Carefully inspect the lantern's two fixture wires. One has very fine ridges molded into the plastic covering – this is the NEUTRAL WIRE. The second wire's covering is smooth – this is the HOT WIRE. The bare wire is the GROUND WIRE.
9. Connect the GROUND WIRE from the fixture with the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the GROUND WIRE from the fixture to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
10. Connect the NEUTRAL WIRE from your fixture with the Neutral wire (usually white) from your ceiling box using a wire nut.
11. Connect the HOT WIRE from your fixture with the hot wire (usually black) from your outlet box using a wire nut. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
12. Raise the Canopy (E) to ceiling and screw Canopy Ring (F) onto the Mounting Loop (C) to secure.
13. Insert the recommended bulbs (not included) into sockets.
14. Assembly is complete.

CARE INSTRUCTIONS

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.