


MODERN PICTURE LIGHT 12"

PARTS ENCLOSED

- (A) Metal Anchors (2)
- (B) Mounting Screws (2)
- (C) Base Plate (1)
- (D) Arm Adjustment Key (1)
- (E) Shade Adjustment Key (1)
- (F) Bulb (1)

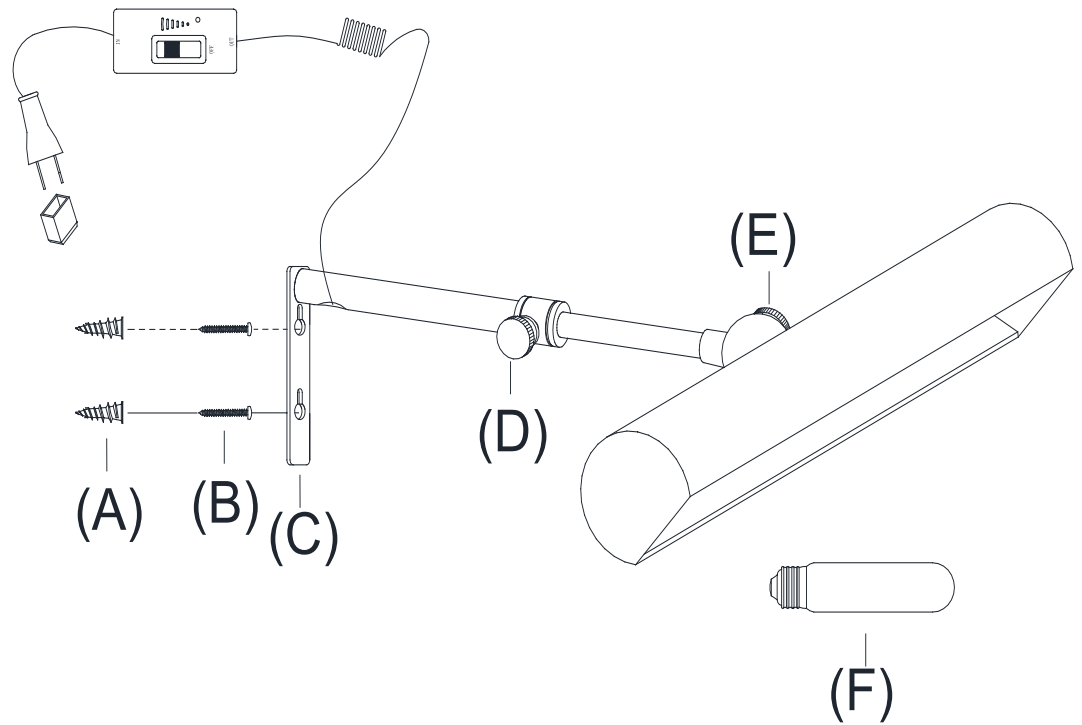

MODERN PICTURE LIGHT 12"

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to one (1) 25-Watt maximum Type T lightbulb (included) or one (1) 9-Watt compact fluorescent lightbulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings. Do not discard the outer carton.
2. Place Base Plate (C) on the wall at desired height. Use a level to make sure Base Plate (C) is vertical.
3. Using a pencil, make a mark in the top center of each keyhole.

ASSEMBLY & INSTALLATION CONT.

4. Drill 1/8" holes into your pencil marks on the wall. For each hole:
 - If you encounter a wall stud, then drive a Mounting Screw (B) into the hole with a Phillips screwdriver.
 - If you don't encounter a wall stud, drive a Metal Anchor (A) into the hole using a Phillips screwdriver. Once Metal Anchor (A) is flush with the wall surface, drive Mounting Screw (B) into Metal Anchor (A) using a Phillips screwdriver.
 - In both cases, leave approximately 1/8" of screw threads exposed.
5. Hook Base Plate (C) onto Mounting Screws (B). If Base Plate (C) is not snug against the wall, remove it, tighten each screw at a quarter turn and replace Base Plate (C). Repeat until snug.
6. Insert Bulb (F) into the socket.
7. Plug into proper electrical outlet and test fixture.
8. Assembly is complete.

ADJUSTMENT INSTRUCTIONS

1. Loosen Arm Adjustment Key (D) and Shade Adjustment Key (E) found on stem.
2. Adjust lamp arm and shade to desired height and position.
3. Tighten Arm Adjustment Key (D) and Shade Adjustment Key (E) to secure in place.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.