

RESTORATION HARDWARE

ITALIAN STARBURST 58IN

PART ENCLOSED

| PARTENCLOSED | | |
|--------------|---------------------------|-------|
| A | ceiling bracket | 1pcs |
| в | ceiling canopy | 1pcs |
| с | retaining nut | 2pcs |
| D | out let box screw | 2pcs |
| E | wire nut | 3pcs |
| F | Metal spacer | 2pcs |
| G | wire lock | 1pcs |
| н | 6" Rod connectors | 2pcs |
| I | 12" Rod connectors | 2pcs |
| J | 18" Rod connectors | 2pcs |
| к | decoration glass with rod | 24pcs |
| | | |



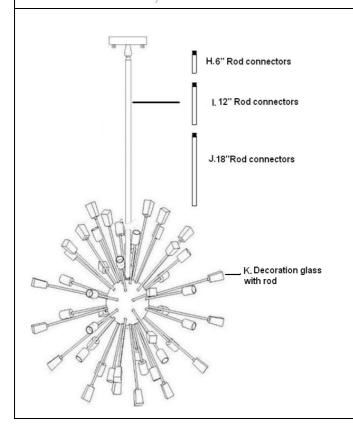

WARNINGS:

All wires are connected.When unpacking,be careful not to pull wires as a bad connection may result.Do not connect electricity until your fixture is fully assembled.To reduce the risk of fire,electrical shock,or personal injury,always turn off fixture and allow it to cool prior to repacing the light bulb.Do not touch the bulbs when fixture is turned on or look directly at lit bulb.Keep flammable material away from the lit bulbs.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE

TO ASSEMBLE

(1)Carefully remove the parts from the carton and place them on a flat surface. Please make sure that you have all the parts indicated before you begin to assemble this item.

(2)Determine the hanging length of chandelier . Connect Connection Rods(H) to one or two sets of Connection Rods (I) and Connective Rods(J) according to the height needed.

(3)Remove ceiling bracket(A) from ceiling canopy(B) by unscrewing retaining nut(C).

(4). Fasten the ceiling bracket(A) onto the Outlet Box by using the Outlet Box Screw (E) with Metal spacer(F).

(5)Thread the wires through the components(suspension eye),retaining nut(C),Ceiling canopy(B) and connect the 3 power wires. The slick wire is the live wire,the coarse wire is the neutral wire,the brass wire is the earth wire. And fixed the extra Steel wire to the ceiling with wire lock(G). It is for best fixed the chandelier.

(6)Screw the suspension eye(with retaining nut C) to the ceiling bracket and fix it securely by Tightening the retaining nut.

(7)Screw 24pcs decoration glass with rods(K)on the main ball.

(8)Check whether the connection is sufficiently strong.Carefully lower the lamp until the rods is taut.

(9)Install 24pcs 40-Watt maximun Type G Candelabra incandescent light bulb (NOT INCLUDED) into the socket of the fixture. DO NOT EXCEED THE SPECIFIED WATTAGE.

CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.

Just wipe clean with a soft cloth.