



ARPÈGE CYLINDER SCONCE

ASSEMBLY & INSTALLATION INSTRUCTIONS

**UNITED STATES ENGLISH**


## ARPÈGE CYLINDER SCONCE

### PARTS INCLUDED

- (A) Mounting Plate (1)
- (B) 1"L Phillips Flat-Head Screws (2)
- (C) Backplate (1)
- (D) 3/16"L Hex Socket Set Screws (2)
- (E) Hook (1)
- (F) Phillips Flat-Head Screw, 1/2"L (1)
- (G) Link (1)
- (H) Threaded Head (1)
- (I) M3 1/4"L Phillips Flat-Head Screws (6)
- (J) Support Bars (3)
- (K) Glass Shade (1)
- (L) Lightbulb (1)
- (M) Allen Wrench (1)
- (N) Wire Nuts (3)

### TOOLS NEEDED

- Phillips-Head Screwdriver (not included)

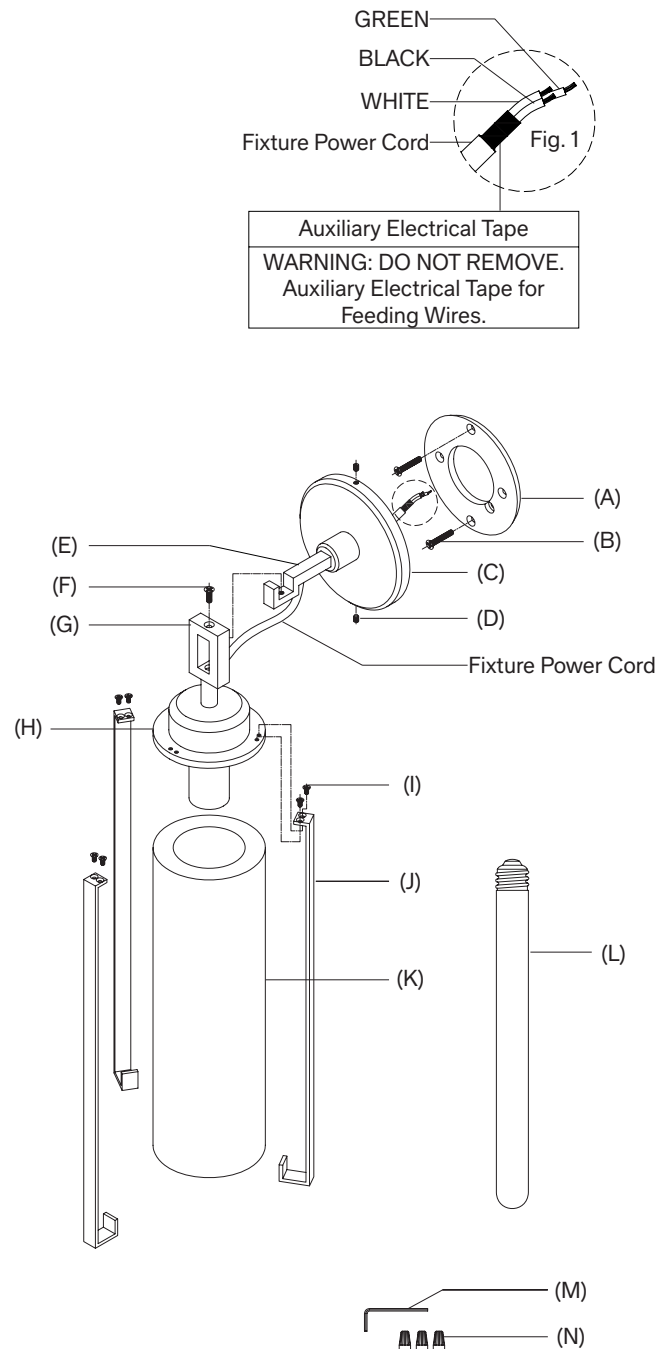

**IMPORTANT: PLEASE READ**

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE OR ALTERNATIVE INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

**IMPORTANT SAFETY FEATURES****BULBS**

This fixture has been rated for one (1) 40-watt-maximum type T8 E26-base incandescent lightbulb. To avoid the risk of fire, do not exceed the recommended wattage.

**DIMMER SWITCH COMPATIBILITY**

This fixture is dimmer-switch compatible, and may only be used with a forward phase dimmer switch.

**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

**THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.**

**ASSEMBLY AND INSTALLATION****SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Secure the Mounting Plate (A) to the wall with the 1"L Phillips Flat-Head Screws (B).
3. Connect the Link (G) on the Hook (E) and secure with a 1/2"L Phillips Flat-Head Screw (F).
4. Feed the fixture power cord through the Link (G) and Hook (E). The wires will come out on the back side of Backplate (C). **WARNING: DO NOT REMOVE THE AUXILIARY ELECTRICAL TAPE ON WIRE FOR FEEDING WIRES.**(See Fig.1)
5. Carefully inspect the pendant's fixture wires. White wire is the NEUTRAL WIRE. Black wire is the HOT WIRE. The Green wire is the GROUND WIRE.
6. Carefully bring the fixture's Backplate (C) and place it close to outlet box for wiring.
7. Connect the GREEN GROUND WIRE and BARE GROUND WIRE from the fixture with the ground wire (usually bare) from your outlet box using a Wire Nut (N). If your house does not have a ground wire, attach the GROUND WIRES from the fixture to the green grounding screw inside of the outlet box. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
8. Connect the NEUTRAL WIRE from your fixture to the neutral wire (usually white) from your outlet box using a wire nut (N).
9. Connect the HOT WIRE from your fixture with the hot wire (usually black) from your outlet box using a Wire Nut (N). **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
10. Tuck the wire connection neatly into the wall's outlet box.
11. Attach the Backplate (C) to the affixed Mounting Plate (A). Secure with the 3/16" L Hex Socket Set Screws (D) and the Allen Wrench (M).
12. Secure two Support Bars (J) on Threaded Head (H) with the M3 1/4"L Phillips Flat-Head Screws (I).
13. Carefully lay and hold the Glass Shade (K) on the installed Support Bars (J), then place the last Support Bar (J) on Threaded Head (H) and secure it with two M3 1/4"L Phillips Flat-Head Screws (I).
14. Insert the recommended lightbulb (L) into the socket.
15. Assembly is complete.

**CARE INSTRUCTIONS**

Wipe all surfaces with a soft, dry cloth. Clean glass with a mixture of mild soap and water. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.