RH

ASPEN CONSOLE WASHSTAND

PARTS LIST

A. Lavatory Basin

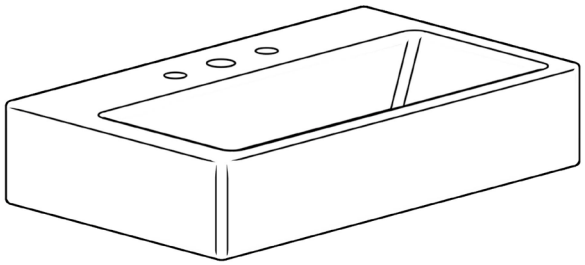

B. Washstand Base

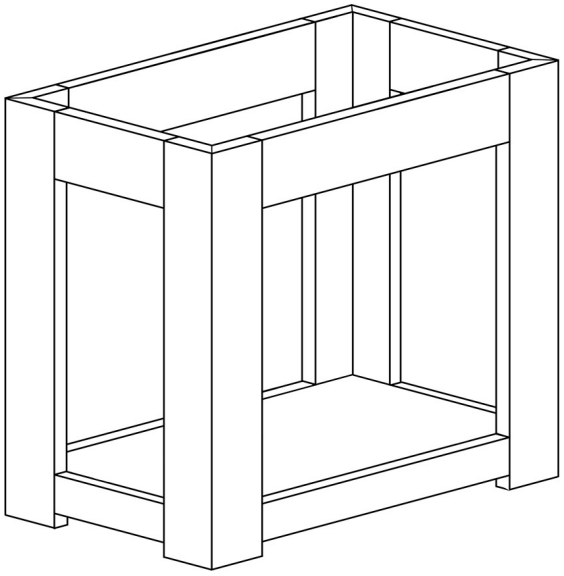

LAVATORY BASIN INSPECTION

- Before you begin, inspect the Lavatory Basin for cracks and defects. If defects are detected, do not install and please call 800-762-1005. If no defects are detected, clean with a soft cloth.

TOOL AND MATERIAL REQUIREMENTS

- Flat, non-abrasive work surface (blanket or smooth cardboard)
- Sealant
- Carpenter's level

PRIMARY INSTALLATION REQUIREMENTS

- Professional two-person crew
- Water supply and drain piping installed according to local plumbing and building codes (sold separately)
- Wall and floor are square and plumb at installation site
- Washstand Base installed square and plumb with wall and floor. Washstand Base also needs to be level

LAVATORY BASIN INSTALLATION

Caution! Installation between two walls requires special care.

If installing between two walls, stop here and follow the second set of instructions.

STANDARD INSTALLATION GUIDELINES

1. Apply a continuous bead of sealant to the top surface of rim of the Washstand Base where it will contact the underside of the lavatory basin.
2. Using a two-person crew, lift Lavatory Basin and set it on top of the Washstand Base.

INSTALLATION BETWEEN TWO WALLS

1. Using a two-person crew, lift Lavatory Basin and set its rear edge on the back of the Washstand Base [D] (closest to the rear wall). See below illustration.
2. Lower front of Lavatory Basin onto the Washstand Base, making sure both ends are lowered at the same rate.
3. Do not shimmy, twist or turn the Lavatory Basin while lowering as this increases the risk of breakage.

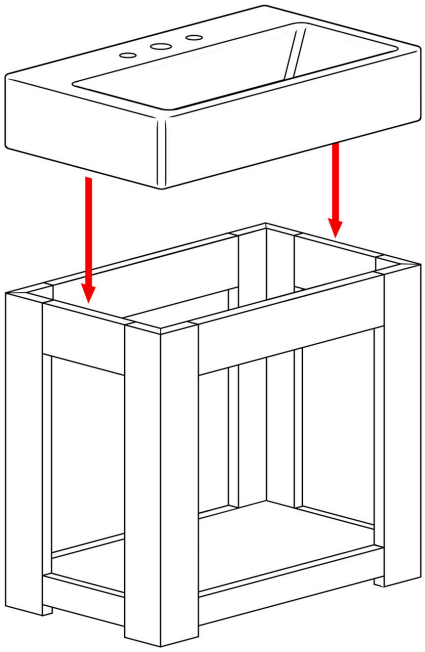

CLEANING AND MAINTENANCE

- Avoid abrasive and harsh chemical cleaners.

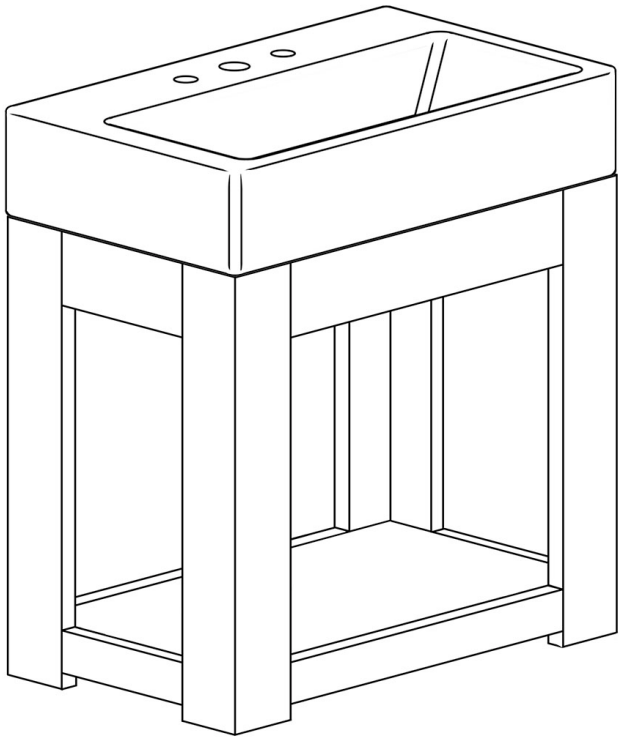

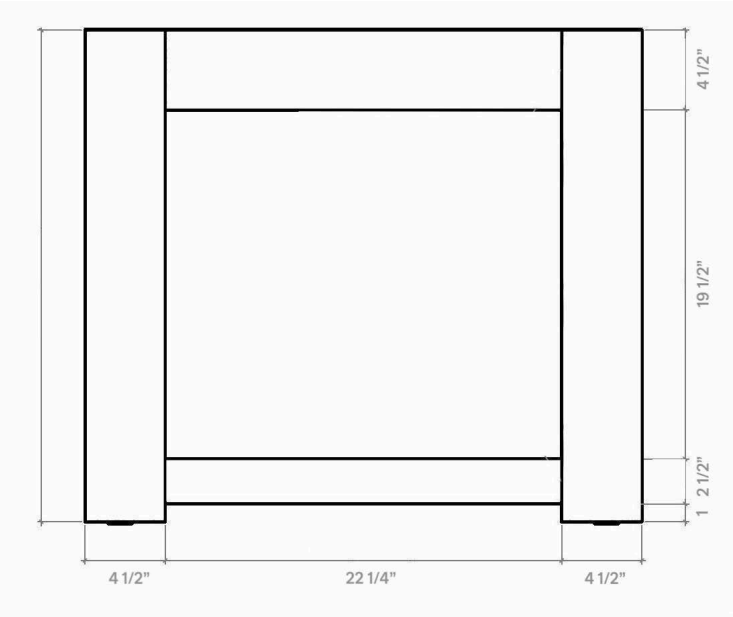

WASHSTAND FRONT VIEW

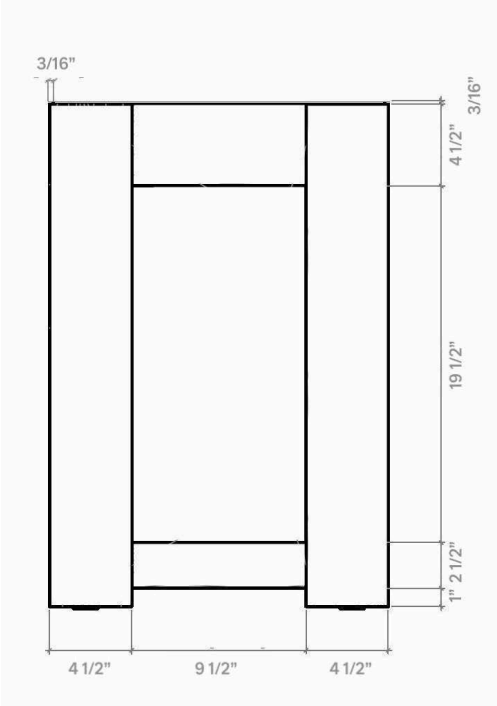

WASHSTAND SIDE VIEW

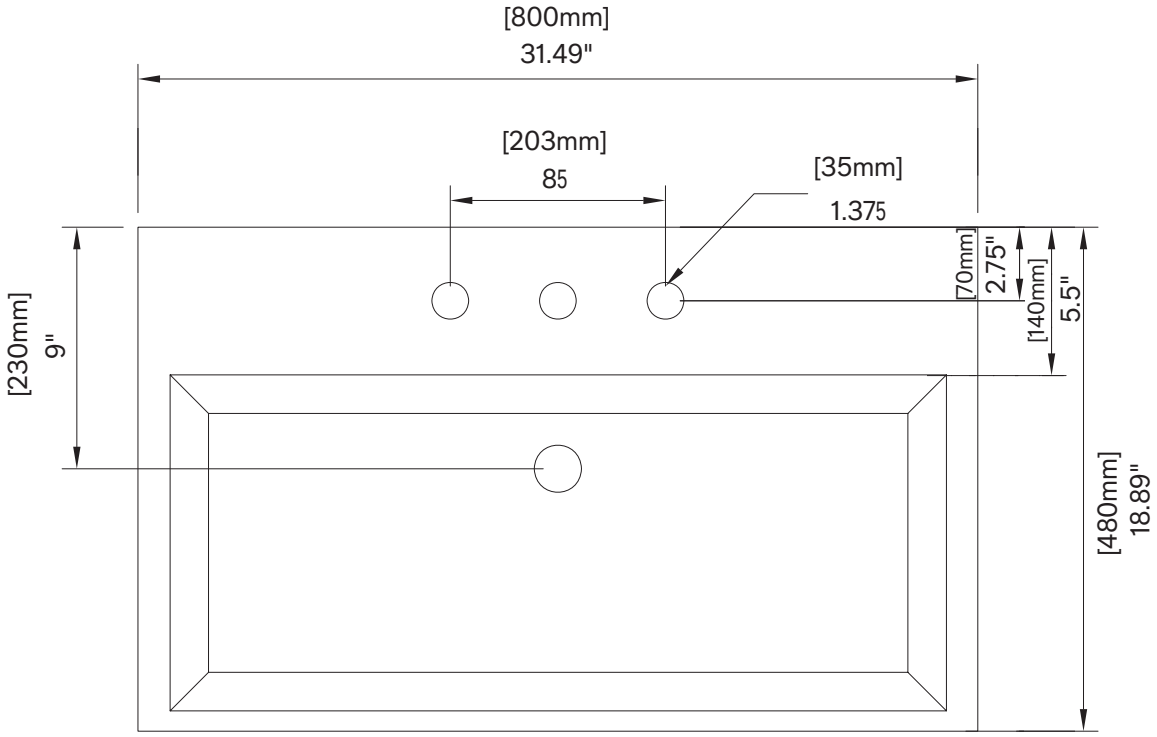

BASIN TOP VIEW

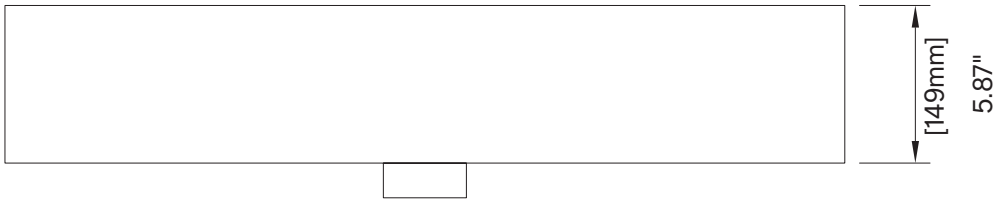

BASIN SIDE VIEW