


# RH

## CHAMPEAUX PENDANT

### PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Mounting Screws (2)
- (C) Base Screws (3)
- (D) Fixture Base (1)
- (E) Mounting Loop (1)
- (F) Closeable Link (1)
- (G) Screws (2)
- (H) Hanging Loop (1)
- (I) 6" Connection Rods (2)
- (J) 12" Connection Rods (2)
- (K) 18" Connection Rods (2)
- (L) Shade (1)
- (M) LED Bulb (1)
- (N) Shade Cover (1)
- (O) Allen Wrench (1)
- (P) Connective Tubes (5)

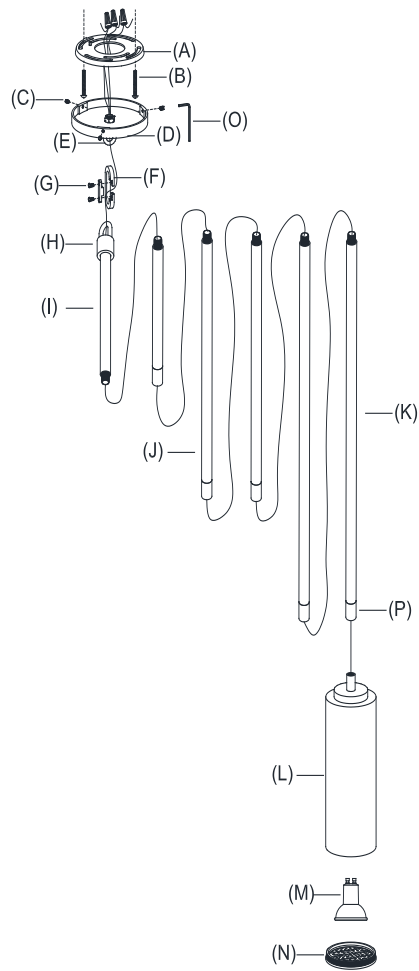

## IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for one (1) 6-watt maximum Type PAR16 LED bulb (included). To avoid the risk of fire, do not exceed the recommended wattage.

## WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

## ASSEMBLY &amp; INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

- Carefully remove all parts from the box and remove all plastic coverings.
- Determine the hanging length of pendant. Connect some or all Connection Rods (I) (J) (K) and Connective Tubes (P) to the threaded joint on top of Shade (L) according to the height needed.

## ASSEMBLY &amp; INSTALLATION CONT.

- Open the Closeable Link (F) by removing Screws (G). Join Mounting Loop (E), Closeable Link (F), and Hanging Loop (H) together and secure by locking the Closeable Link (F) with Screws (G).
- Remove Mounting Plate (A) from Fixture Base (D) by unscrewing Base Screws (C) with Allen Wrench (O) in counter-clockwise direction.
- Attach Mounting Plate (A) to ceiling outlet box by aligning the holes and securing with Mounting Screws (B).
- Gently pull the wire from ceiling outlet box and allow the wire to hang. Thread the wire through the center hole in Mounting Plate (A).
- Carefully inspect the chandelier's two fixture wires. One has very fine ridges molded into the plastic covering – this is the NEUTRAL WIRE. The second wire's covering is smooth – this is the HOT WIRE. The bare wire is the GROUND WIRE.
- Connect the GROUND WIRE from the fixture with the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the GROUND WIRE from the fixture to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
- Connect the NEUTRAL WIRE from your fixture with the Neutral wire (usually white) from your ceiling box using a wire nut.
- Connect the HOT WIRE from your fixture with the hot wire (usually black) from your outlet box using a wire nut. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- Attach Fixture Base (D) to Mounting Plate (A) and secure with Base Screws (C). Tighten with Allen Wrench (O).
- Insert Bulb (M) into the socket.
- Thread Shade Cover (N) to the bottom of Shade (L).
- Restore power to outlet box and check operation of fixture.
- Assembly is complete.

## CARE INSTRUCTIONS

Do not use polishes or cleaners on your lamp. Just wipe clean with a soft, dry cloth.