

RH


CRYSTAL HALO CHANDELIER 59"

PARTS

- (A) Junction Box, 50lb. (22.7 kg) MIN. FIXTURE RATED (not included)
- (B) Mounting Screws (6 sets; not included)
- (C) Wire Nuts (3)
- (D) Ceiling Plate (1)
- (E) Canopy (1)
- (F) Bolts (3)
- (G) Steel Wires (3)
- (H) Fixture Body (1)
- (I1) Small Allen Key (1)
- (I2) Large Allen Key (1)
- (J) Safety Cable (1)

PRODUCT DESCRIPTION

General material: Glass and iron
 Height: 8 in. (20 cm)
 Diameter: 59 in. (150 cm)
 Weight: 130 lb. (59 kg)
 Grounded/hardwired

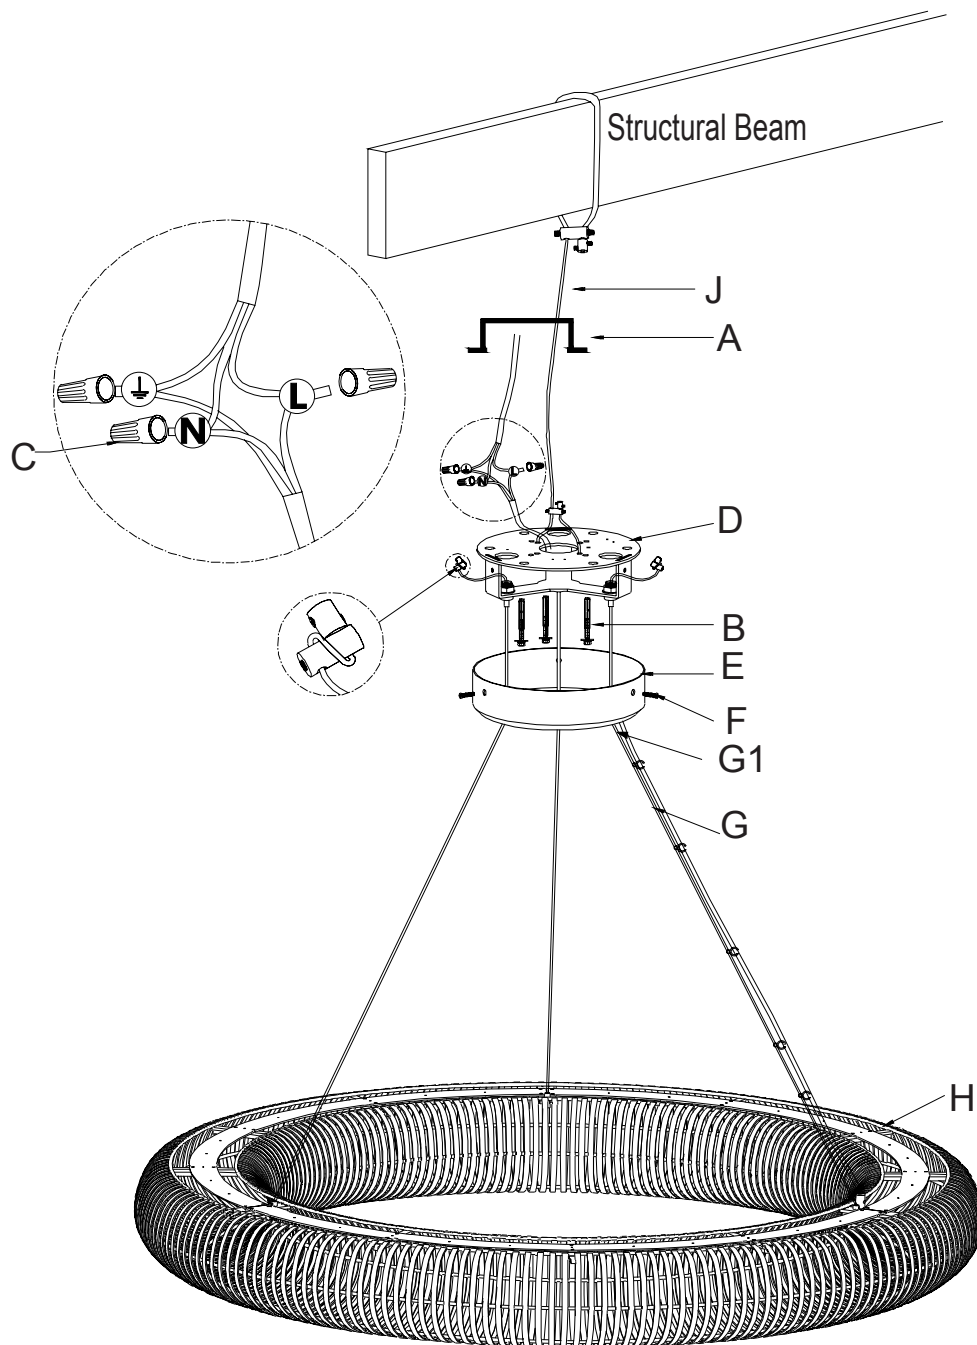

PROFESSIONAL INSTALLATION REQUIRED

IMPORTANT SAFETY INSTRUCTIONS

1. Use an authorized and certified electrician for consultation and installation.
2. This fixture has been rated for a 42-watt maximum LED module.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The ceiling must have the capacity of at least 5 times the weight of the ceiling light. For this light, a ceiling capacity of at least 650 lb. (295 kg) is required.
5. The manufacturer and distributor accept no liability for incorrect installation.
6. For indoor use only.
7. Keep away from children.

WARNINGS

1. Turn off electrical supply at main circuit panel before installing. Do not connect electrical supply until your light is fully assembled and installed.
2. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing LED module. Do not touch LED module when fixture is turned on or look directly at module. Keep flammable materials away from LED module.
4. Deviation from instructions may result in a risk of fire or electric shock.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Turn OFF power to junction box where the ceiling light will be installed.
3. Loosen bolts (F) and remove the ceiling plate (D) from the canopy (E).
4. Have a professional contractor reinforce ceiling. Attach the safety cable (J) to ceiling beam through the junction box (A), then attach the safety cable to the fixed fixture on the ceiling and secure with nut locker.
5. Attach the ceiling plate (D) to the ceiling with mounting screws (B).
6. Connect the ground wire from the fixture to the ground junction box wire (usually the green or bare copper) with a plastic wire nut (C) and wrap the connection with electrical tape. Connect the hot wire to the junction box wire (usually black or smooth) with a plastic wire nut (C) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a plastic wire nut (C) and wrap the connection with electrical tape.
7. Fasten the steel cable (G) with the locker and tighten with Allen key; see figure on following page.
8. Move the canopy (E) up to the ceiling, then fasten the bolts (F).
9. Press and loosen the height adjustable steel locking (G1) to adjust the height of the light and level it.
10. Restore power to the junction box and test ceiling light fixture.
11. Assembly is complete.

CARE INSTRUCTIONS

1. Make sure that power is turned off and LED module has cooled before handling.
2. Wipe clean with a dry cloth/mild soapy solution. Do not use corrosive cleaners.
3. The cable/cord of this ceiling light cannot be replaced; if the cable is damaged, do not use the light.

ENVIRONMENT

Special waste handling may be required. Please contact your local authorities for more information.

CEILING SAFETY CABLE ASSEMBLY

1. Before installation, remove nut lockers A and B by loosening the set screw from the ceiling safety cable.
2. Insert the ceiling safety cable through the nut lockers, as the drawing shows.
3. Use small Allen key to fasten nut locker A onto the ceiling safety cable.
4. Use small Allen key to fasten nut locker B onto the ceiling safety cable.

