


RH

MACHINIST TASK FLOOR LAMP  
ASSEMBLY & INSTALLATION INSTRUCTIONS  
UNITED STATES ENGLISH

MACHINIST TASK FLOOR LAMP

PARTS INCLUDED

- (A) Bulb (1)
- (B) Top Arm (1)
- (C) Small Handle (1)
- (D) Lower Arm (1)
- (E) Big Handle (1)
- (F) Lamp Pole (1)
- (G) Lamp Base (1)
- (H) Base Weight (1)
- (I) Washer (1)
- (J) Nut (1)
- (K) Wrench (1)
- (L) Felt Pad (1)
- (M) Adjustment Keys (2)

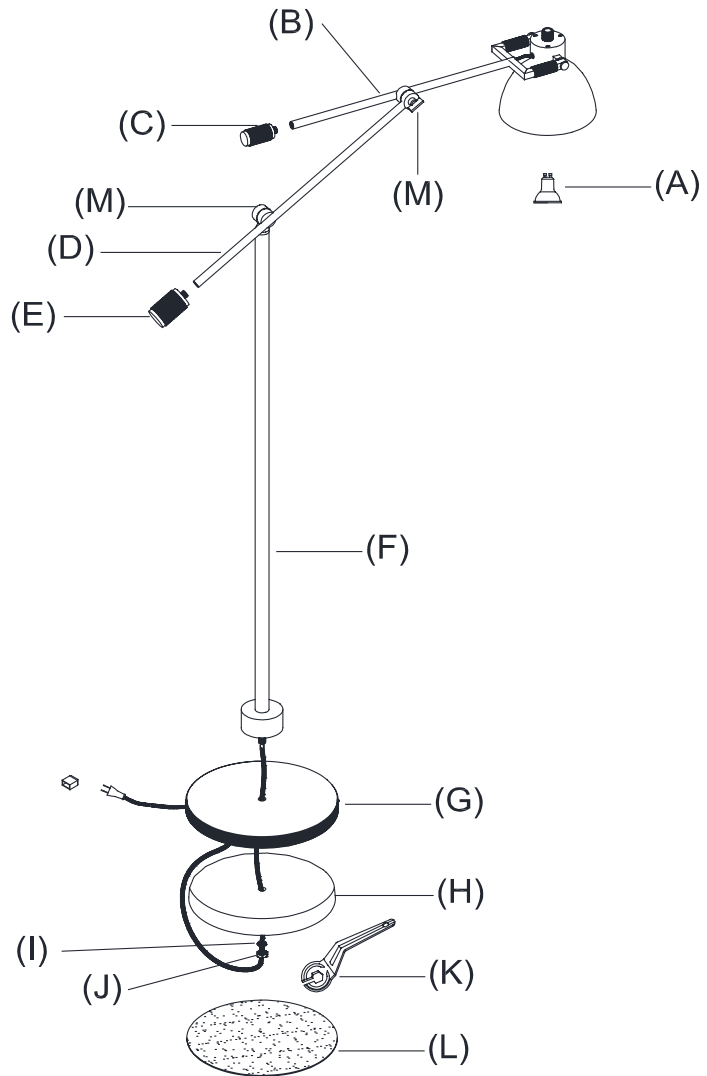

**IMPORTANT: PLEASE READ**

## IMPORTANT SAFETY FEATURES

## BULBS

This lamp has been rated for up to one (1) 6-watt maximum Type PAR 16 maximum LED Lightbulb (included). To avoid the risk of fire, do not exceed the recommended wattage.

## DIMMER SWITCH COMPATIBILITY

This lamp is dimmer-switch compatible and may only be used with a forward-phase dimmer switch.

**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the lamp is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when lamp is illuminated. Keep flammable materials away from lit bulb.

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

## ASSEMBLY AND INSTALLATION

**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Connect Lamp Pole (F) to Lamp Base (G) and Base Weight (H). Secure with Washer (I) and Nut (J) using Wrench (K).
3. Remove the adhesive backing from Felt Pad (L) and neatly apply Felt Pad (L) to the bottom of Lamp Base (G).
4. Screw Small Handle (C) onto Top Arm (B), then screw Big Handle (E) onto Lower Arm (D).
5. Screw Bulb (A) into the socket.
6. Loosen Adjustment Keys (M) and swing Top Arm (B) and Lower Arm (D) to adjust the lamp shade to the desired position, then tighten Adjustment Keys (M) to secure.
7. Restore power then plug the power cord into electrical outlet to test the lamp.
8. Assembly is complete.

## CARE INSTRUCTIONS

Do not use polishes or cleaners on the lamp. Wipe clean with a soft, dry cloth.