


MARBUZET LINEAR SCONCE 25"

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. IF YOU ARE UNSURE ABOUT YOUR WALL TYPE OR WHAT MOUNTING METHOD TO USE, CONSULT A QUALIFIED PROFESSIONAL OR YOUR LOCAL HARDWARE STORE.

PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) 3/16"L Hex Socket Set Screws (4)
- (C) Backplate (1)
- (D) Knurled Screws (2)
- (E) Crystal Panel (1)
- (F) Lightbulbs (2)
- (G) Allen Key (1)
- (H) Wire Nuts (3)

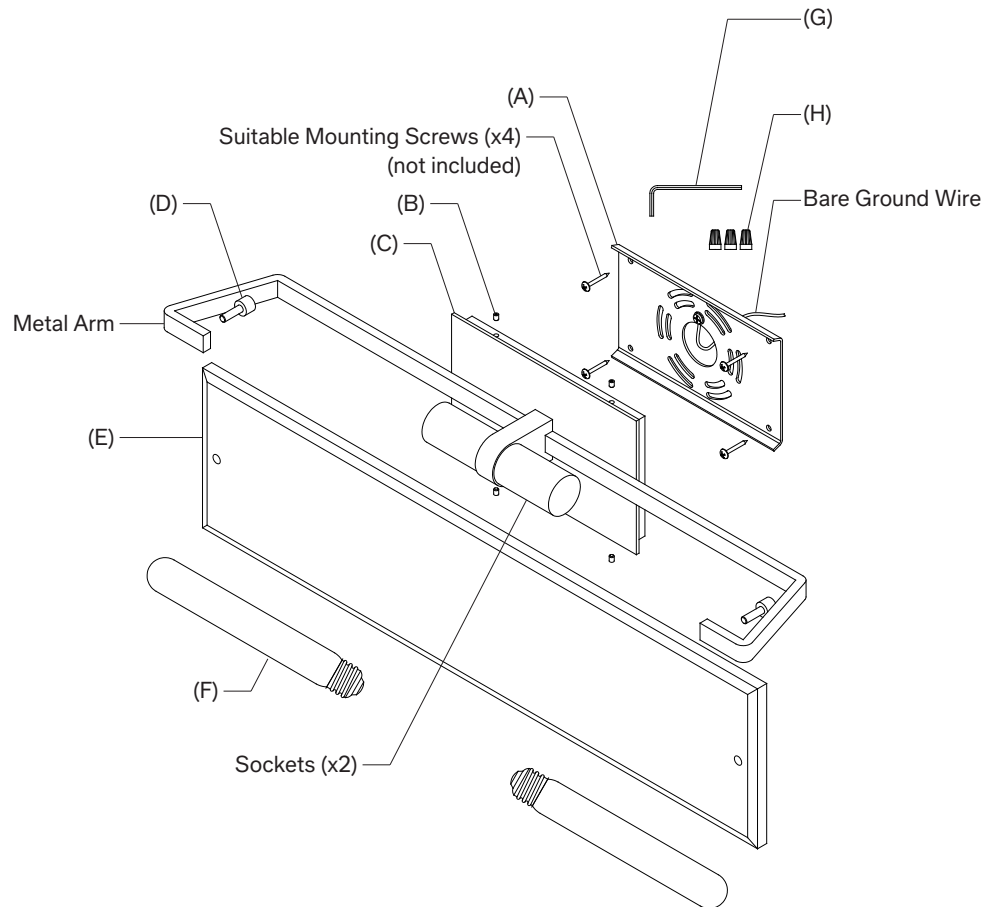

IMPORTANT PLEASE READ**SAFETY INSTRUCTIONS**

- (1) Must use an authorized and certified electrician for consultation and installation. Electrician must be familiar with commercial-type installation of very heavy sconce fixture and the hazards involved. Electrician should install fixture as per applicable local installation code.
- (2) FOR NONCOMBUSTIBLE SURFACE ONLY.
- (3) This fixture has been rated for two (2) 30-watt maximum Type T9 standard lightbulbs (included). To avoid the risk of fire, do not exceed the recommended wattage.
- (4) The manufacturer and distributor accept no liability for incorrect installation.
- (5) Keep away from children.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch the bulb when fixture is turned on or look directly at lit bulbs. Keep flammable materials away from lit bulbs.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Attach Mounting Plate (A) to wall's outlet box and secure with suitable mounting screws (not included) and proper fasteners from your local hardware store.
3. Carefully inspect the sconce's fixture wires. White wire is the NEUTRAL WIRE. Black wire is the HOT WIRE. Bare wire is the GROUND WIRE.
4. Carefully lift up the Backplate (C) with the light fixture and place it close to outlet box for wiring.
5. Connect the GROUND WIRE from the fixture with the ground wire (usually bare) from your outlet box using a wire nut. If your house does not have a ground wire, attach the GROUND WIRE from the fixture to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
6. Connect the NEUTRAL WIRE from your fixture with the neutral wire (usually white) from your outlet box using a wire nut.
7. Connect the HOT WIRE from your fixture with the hot wire (usually black) from your outlet box using a wire nut. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
8. Tuck the wire connection neatly into the wall's outlet box.
9. Attach Backplate (C) with light fixture to affixed Mounting Plate (A) and secured with 3/16"L Hex Socket Set Screws (B) using Allen Key (G).
10. Secure Crystal Panel (E) to the metal arm with Knurled Screws (D).
11. Insert the Lightbulbs (F) into socket.
12. Assembly is complete.

CARE INSTRUCTIONS

Wipe all surfaces with a soft, dry cloth. Clean glass with a mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.