
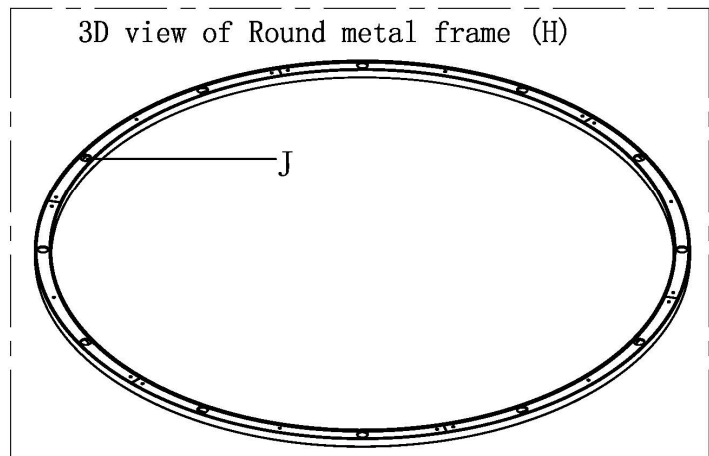


## RENNES ROUND CHANDELIER 48IN

### PARTS ENCLOSED:

- (A) Mounting plate (1)
- (B) Green ground screw (1)
- (C) Mounting screw (2)
- (D) Canopy (1)
- (E) M5 canopy screw (3)
- (F) Glass sleeve (12)
- (G) Bulb (12)
- (H) Round metal frame (1)
- (I) Wire connectors (3)
- (J) Socket (12)
- (K) Allen wrench (1)

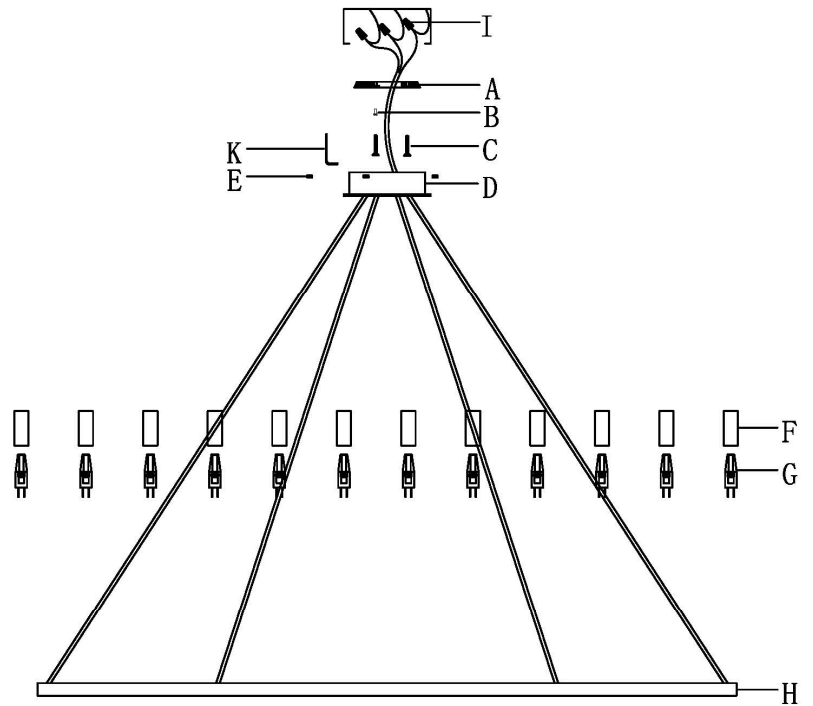

## RENNES ROUND CHANDELIER 48IN


**IMPORTANT PLEASE READ****WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.****IMPORTANT SAFETY INSTRUCTIONS:**

This fixture has been rated for up to (12) 2W max G4 standard LED bulb (included). To avoid the risk of fire, do not exceed the recommended wattage.


**WARNINGS:**

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your lamp is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off the lamp and allow it to cool prior to replacing the lightbulb. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.

**This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning, or otherwise touching this light fixture.**

 **WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.**

 **WARNING: STRANGULATION HAZARD**  
Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

**ASSEMBLY & INSTALLATION:**

**(Professional installation recommended with at least 2-3 persons for installation.)**

1. Carefully remove all parts from the box and remove plastic covering.
2. Turn OFF power to the junction box where the lamp will be installed.
3. Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector (I) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a plastic wire connector (I) and wrap the connection with electrical tape.
4. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (usually green or bare wire). Or wrap the ground wire around the green ground screw (B ).
5. Attach mounting plate (A) to the outlet box using the mounting screws (C) to tighten.
6. Attach the canopy (D) to the mounting plate (A), using the M5 canopy screw (E) and Allen wrench (K) to secure.
7. Insert the bulbs (G) into the sockets (J). Then cover the bulbs with the glass sleeves (F).
8. Restore power to the junction box and test fixture.
9. Installation is complete.

**CARE INSTRUCTIONS:**

Wipe clean with soft dry cloth. Do not use polishes or cleaners, as it may damage the finish.