


RH

TORCELLO TORCHIERE FLOOR LAMP

PARTS ENCLOSED

(A) Bulbs (2)

(B) Sockets (2)

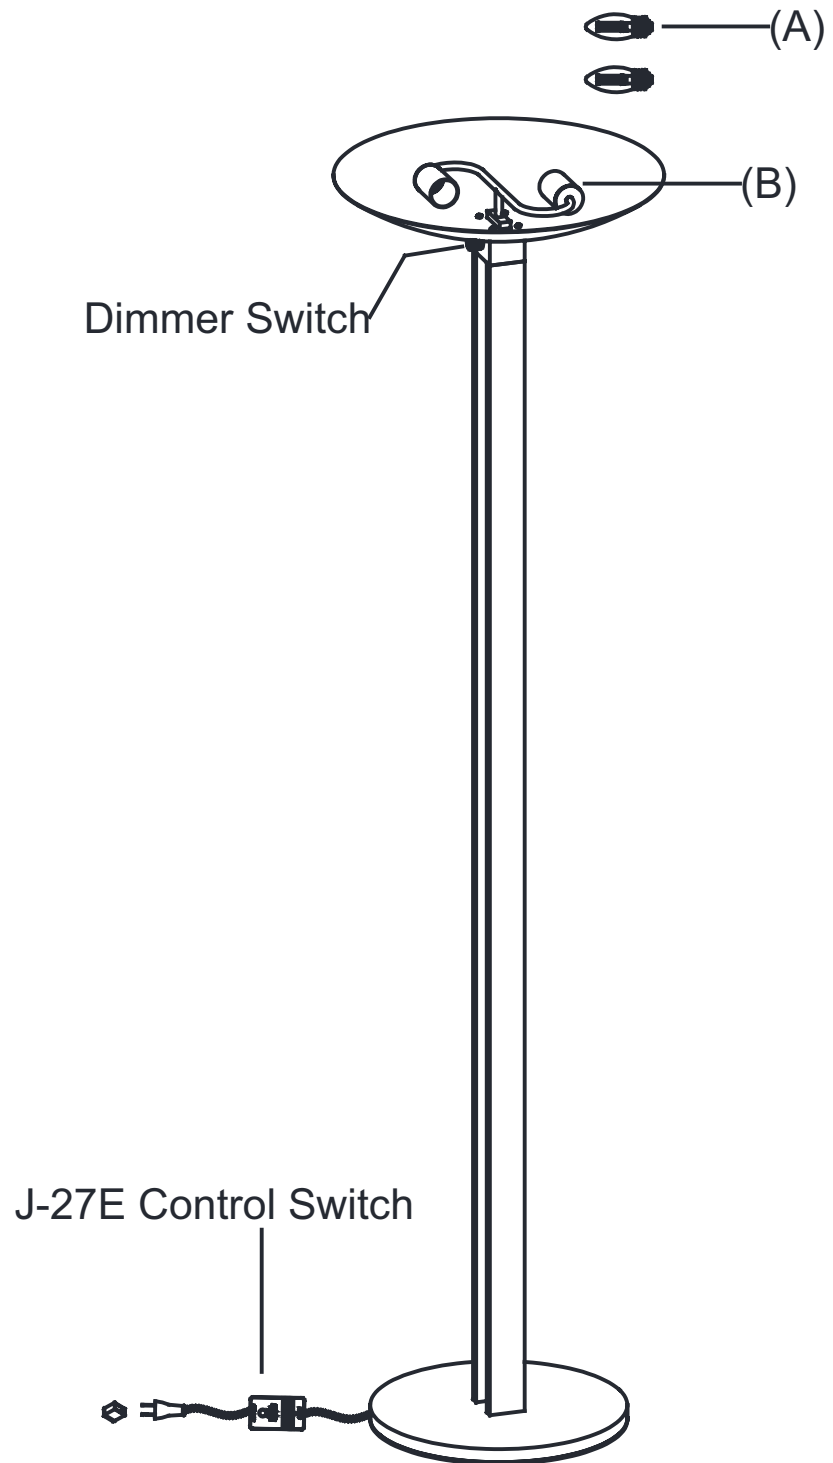

TORCELLO TORCHIERE FLOOR LAMP

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for two (2) 40-watt maximum Type B lightbulbs, two (2) 9-watt compact fluorescent lightbulbs or two (2) 4.5-watt SBLED lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Insert Bulbs (A) into each of Sockets (B).
3. Restore power to outlet box and check operation of fixture.
4. Assembly is complete.

J-E27 Operation:

1. The red LED does not illuminate if a bulb less than 190W is used the bulb is in normal operation.
2. If a bulb higher than 190W is used, this switch will automatically shut the lamp off and the red LED illuminate indication that the circuit is in protection mode. The lamp will not illuminate unless replace with the bulb of 190W lower and pushing the reset button.
3. Note: It is used for only in direct connection to 120 VAC, 60Hz.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.