


# RH

## WRIGHT GRAND SCONCE

### PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Mounting Screws (2)
- (C) Cap Nuts (2)
- (D) Fixture Base (1)
- (E) Socket Rings (2)
- (F) Sockets (2)
- (G) Metal Anchor (1)
- (H) Screw (1)
- (I) Mounting Bracket (1)
- (J) Base (1)
- (K) Set Screws (2)
- (L) Wrench (1)
- (M) LED Bulbs (2)
- (N) Shade (1) (packed separately)

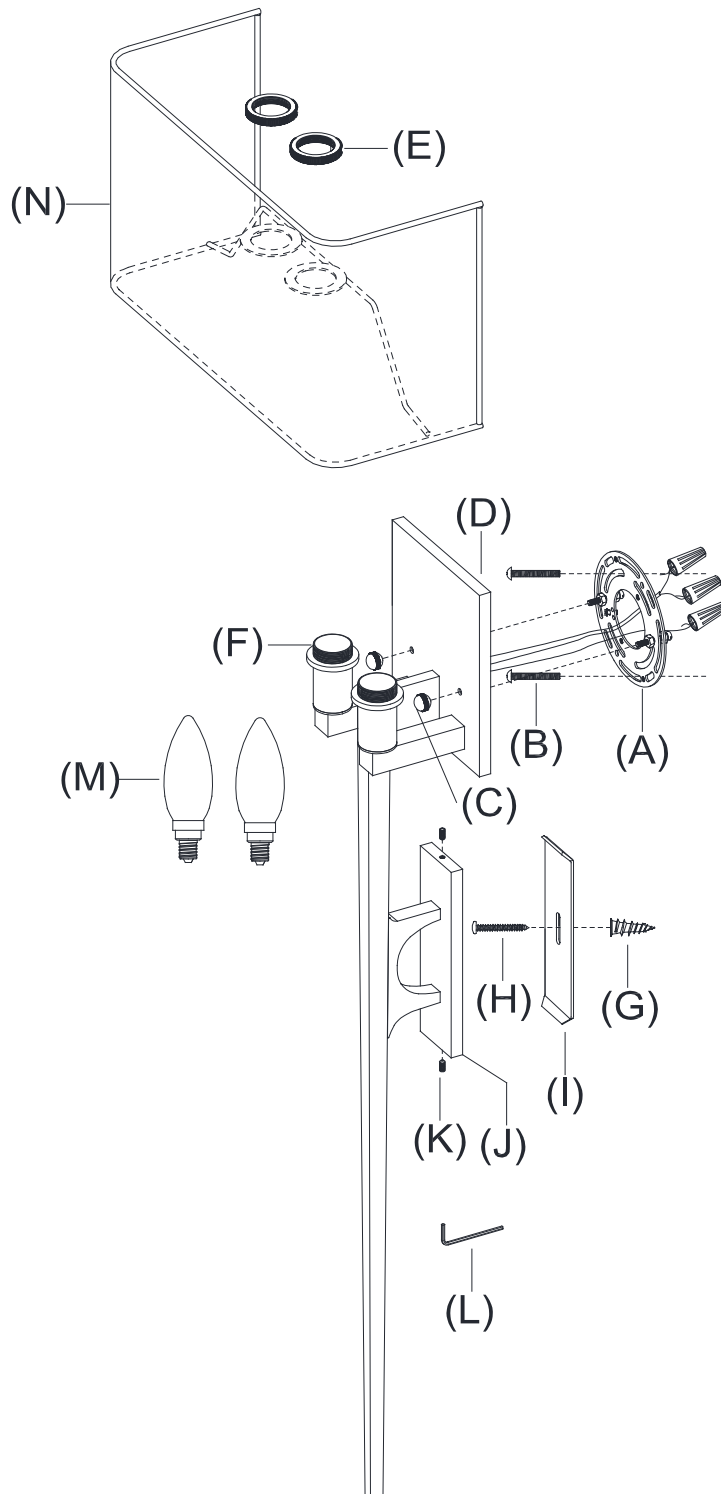

**IMPORTANT SAFETY INSTRUCTIONS**

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for two (2) 40-watt maximum type B lightbulbs, two (2) 9-watt CFL lightbulbs, or two (2) 5.5-watt SBLED lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch or look directly at the bulbs when fixture is illuminated. Keep flammable materials away from lit bulbs.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

**ASSEMBLY & INSTALLATION**

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Remove Mounting Plate (A) from Fixture Base (D) by unscrewing Cap Nuts (C) and remove Mounting Bracket (I) from Base (J) by unscrewing Set Screws (K) using Wrench (L) in a counter-clockwise direction.
3. Hold the whole fixture against the wall outlet box, then draw an outline for Base (J) on the wall. Remove the whole fixture.

**ASSEMBLY & INSTALLATION CONT.**

4. Place Mounting Bracket (I) on the marked location; mark a point for the hole of Mounting Bracket (I). Remove Mounting Bracket (I).
5. Drill a small hole on the marked point; the hole should be big enough for Metal Anchor (G). Put Metal Anchor (G) into the hole.
6. Attach Mounting Bracket (I) to the marked location and secure by inserting Screw (H) to Metal Anchor (G).
7. Attach Mounting Plate (A) to the wall outlet box by aligning the holes and secure with Mounting Screws (B).
8. Gently pull the wire from wall outlet box and allow the wire to hang. Thread the wire through the center hole in Mounting Plate (A).
9. Attach the fixture ground wire (yellow-green) and house ground wire (usually green or bare) to the wall outlet box with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
10. Connect the neutral wire (white) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
11. Connect the hot wire (black) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
12. Attach Fixture Base (D) to Mounting Plate (A) and secure with Cap Nuts (C). Attach Base (J) to Mounting Bracket (I) and secure with Set Screws (K). Tighten using Wrench (L).
13. Remove Socket Rings (E) from Sockets (F). Place Shade (N) (packed separately) onto Sockets (F) and secure with Socket Rings (E).
14. Insert LED Bulbs (M) into Sockets (F).
15. Restore power to the wall outlet box and check operation of fixture.
16. Assembly is complete.

**CARE INSTRUCTIONS**

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.