


CHEVALIER GRAND PENDANT

PARTS ENCLOSED

- (A) Wire Nuts (3)
- (B) Mounting Plate (1)
- (C) Mounting Screws (2)
- (D) Mounting Loop (1)
- (E) Canopy (1)
- (F) Canopy Ring (1)
- (G) End Link (1)
- (H) Hanging Loop (1)
- (I) Connection Rods, 18" (2)
- (J) Connection Rods, 12" (2)
- (K) Connection Rods, 6" (2)
- (L) Connectors (5)
- (M) Joint (1)
- (N) Lantern (1)
- (O) Side Glass Panels (6)
- (P) Bulbs (3)
- (Q) Screws (12)
- (R) Metal Tabs (6)
- (S) Bottom Glass Panel (1)

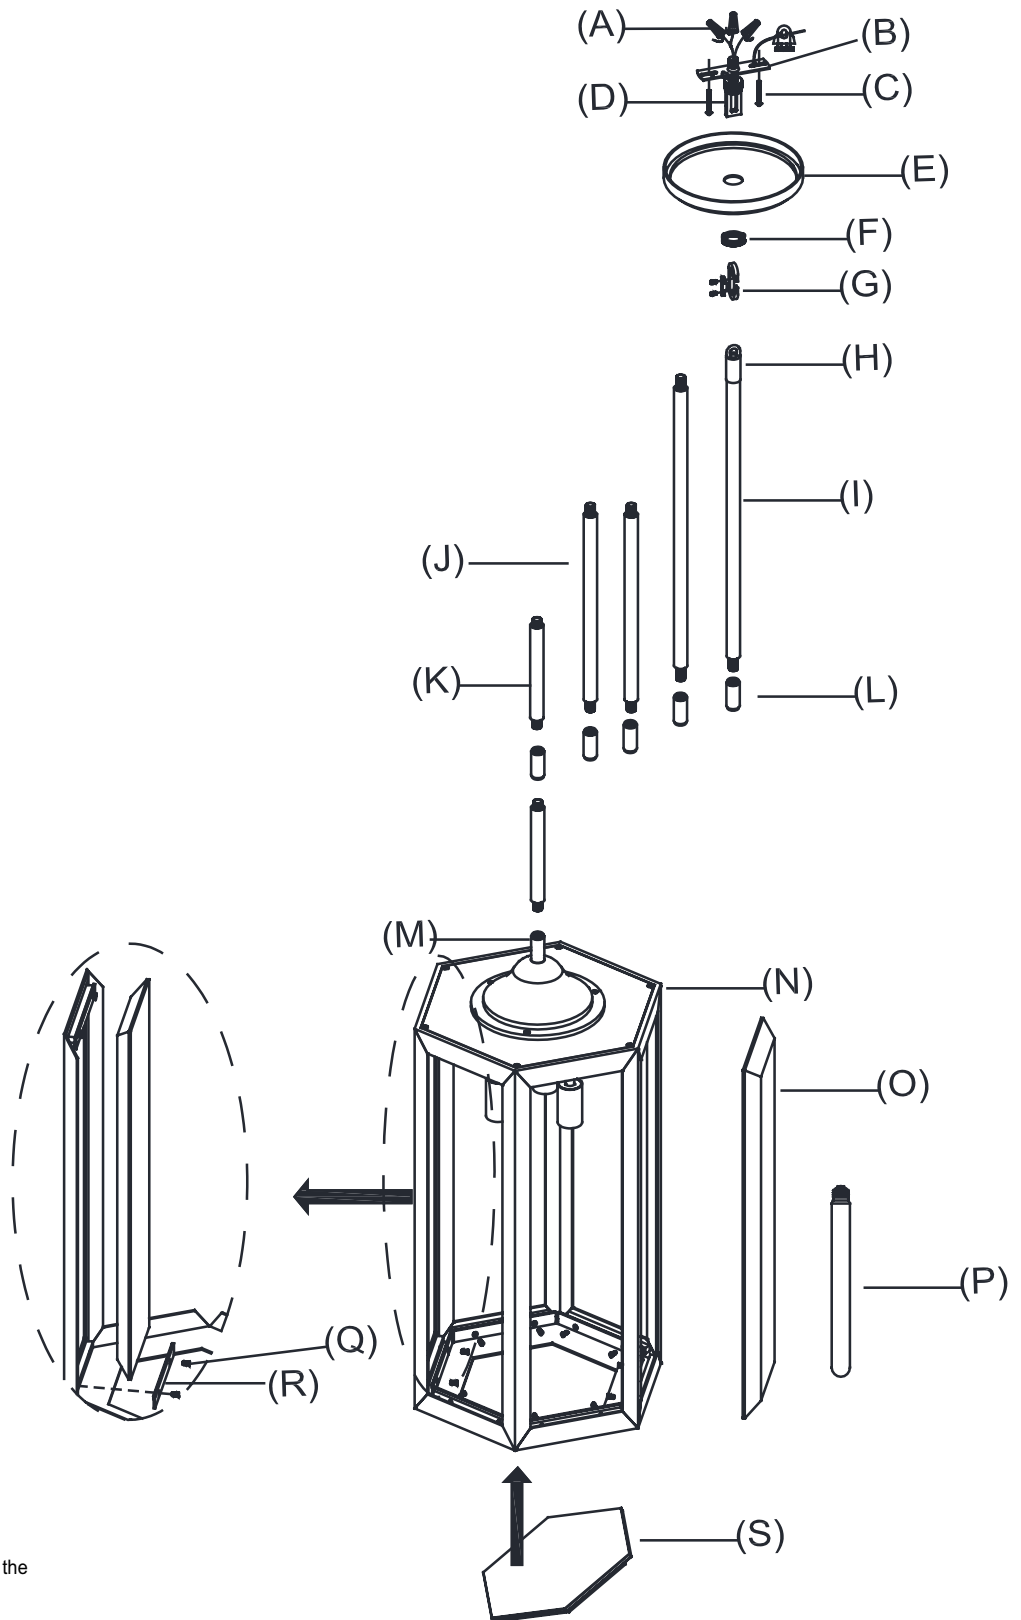

Install safety cable:

1. Wrap the safety cable around the slot hole on the mounting plate.
2. Wrap the safety cable around the saddle (a).
3. Insert U-bolt clip (b) into the saddle (a) and secure with the nuts (c).

CHEVALIER GRAND PENDANT

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for three (3) 60-watt max type T lightbulbs or three (3) 13-watt compact fluorescent lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch or look directly at the bulbs when fixture is illuminated. Keep flammable materials away from lit bulbs.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Install Mounting Plate (B) to the ceiling outlet box and secure with Mounting Screws (C).
3. Install Canopy (E) to Mounting Loop (D) and secure with Canopy Ring (F).

ASSEMBLY & INSTALLATION CONT.

4. Determine desired overall length and feed the wires and safety cable through some or all Connection Rods (I) (J) (K) and Connectors (L).
5. Connect desired Connection Rods (I) (J) (K) and Connectors (L) to Joint (M) on Lantern (N).
6. Feed the wires and safety cable through Mounting Loop (D).
7. Loosen Canopy Ring (F). Slide Canopy (E) and Canopy Ring (F) over Hanging Loop (H) carefully.
8. Connect Hanging Loop (H) to Mounting Loop (D) using End Link (G). Secure the screws to secure.
9. Connect the safety steel wire from the fixture and the safety cable from the ceiling. Refer to the illustration on previous page.
10. Connect the fixture ground wire and to the supply ground wire (usually green or bare copper) using a Wire Nut (A). NOTE: It is imperative that the fixture is grounded.
11. Connect the fixture neutral wire (ribbed) to the supply neutral wire (usually white) using a Wire Nut (A).
12. Connect the fixture hot wire (smooth with markings) to the supply hot wire (usually black) using a Wire Nut (A). CAUTION: Do not reverse the hot and neutral connections.
13. Make sure all wire connections are tight, then carefully tuck into the ceiling junction box.
14. Install Canopy (E) to Mounting Plate (B) and secure with Canopy Ring (F).
15. Remove Metal Tabs (R) from Lantern (N) by removing Screws (Q). Insert Side Glass Panels (O) to the top of Lantern (N) and secure with Metal Tabs (Q) and Screws (Q). Tighten the top screws if needed.
16. Install Bulbs (P) into each of the sockets.
17. Install Bottom Glass Panel (S) to the end of Lantern (N).
18. Restore power to outlet box and check operation of fixture.
19. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.