
CYLINDRICAL COLUMN FLOOR LAMP

PARTS ENCLOSED

- (A) Finial (1)
- (B) Shade Riser (1)
- (C) S-Cluster (1)
- (D) Bulbs (2)
- (E) Fixture Body (1)
- (F) Lamp Base (1)
- (G) Washer (1)
- (H) Nut (1)
- (I) Wrench (1)



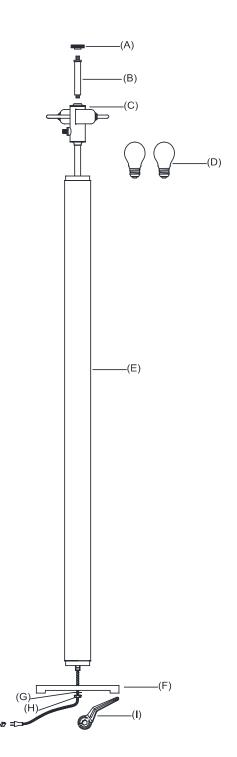

CYLINDRICAL COLUMN FLOOR LAMP

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for two (2) 43-Watt Type A lightbulbs or two (2) 9-Watt SBLED lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.

WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

- Carefully remove all parts from the box and remove all plastic coverings.
- Connect Fixture Body (E) to Lamp Base (F) together by tightening Washer (G) and Nut (H) to the threaded rod at the bottom of Lamp Body (E), then tighten using Wrench (I).
- 3. Thread Shade Riser (B) onto S-Cluster (C).
- 4. Remove Finial (A) from Shade Riser (B). Install the shade (not included) onto Shade Riser (B) and secure with Finial (A).
- 5. Insert Bulbs (D) into each of the sockets.
- 6. Plug into proper electrical outlet and test fixture.
- 7. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.