




LATTICE SCONCE

ASSEMBLY & INSTALLATION INSTRUCTIONS

UNITED STATES ENGLISH

LATTICE SCONCE**PARTS INCLUDED:**

- (A) Junction Box, 25lbs/11.3kg MIN.
FIXTURE RATED (not included)
- (B) Mounting Screws and Plastic Plugs
(4 sets; for concrete wall or drywall)
- (C) Wall Plate (1)
- (D) Fixture Body (1)
- (E) Wire Nuts (3)
- (F) Nut Caps (2)
- (G) Rubber Washers (8 +4 extra)
- (H) Bolts (8 +4 extra)
- (I1) Glass plates 15"x 8" (38 x21 cm) (2)
- (I2) Glass plates 15"x 6" (38 x16 cm) (4)
- (J) Bulbs (2)
- (K) Safety Cable (1)

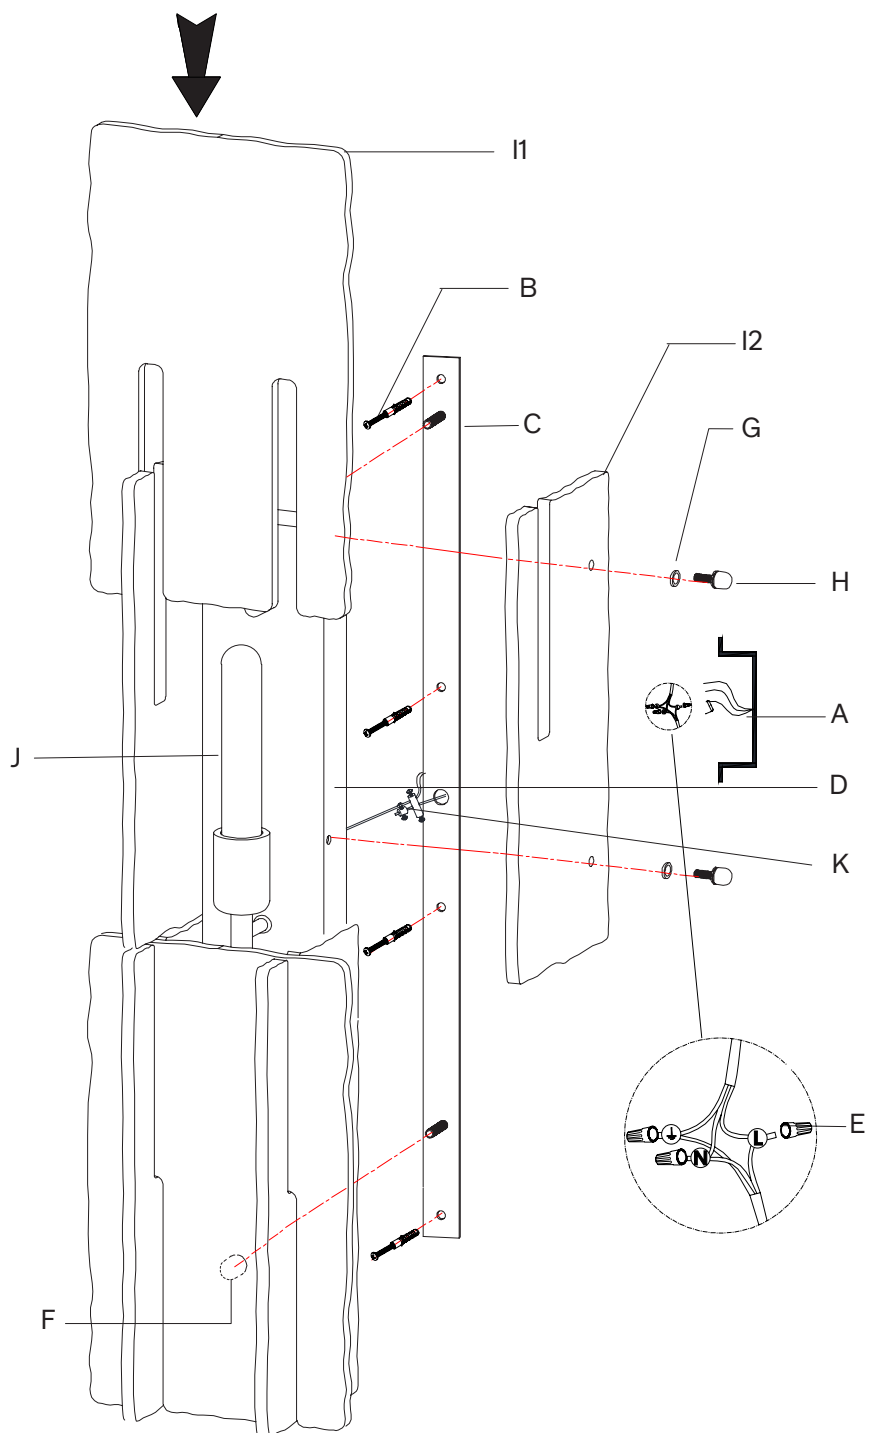

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING TO CONCRETE WALL OR DRY WALL. UNIQUE OR ALTERNATIVE INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES**BULBS**

This fixture has been rated for two (2) 60-watt maximum E26 TYPE T9 incandescent bulbs (not included) or two (2) 9-watt maximum E26 TYPE T9 LED bulbs (two (2) 5-watt E26 TYPE T9 LED bulbs included). To avoid the risk of fire, do not exceed the recommended wattage.

DIMMER SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible and may be used with a forward- or reverse-phase dimmer switch.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch or look directly at the bulbs when fixture is illuminated. Keep flammable materials away from lit bulbs.

WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet (91cm) away from cribs, bassinets, and toddler beds.

Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

ASSEMBLY AND INSTALLATION**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Turn OFF power to junction box (A) where the fixture will be installed.
3. Loosen the nut caps (F) , then detach wall plate (C) from fixture body (D).
4. Have a professional contractor reinforce wall.
5. Attach the wall plate (C) to wall secure with mounting screws and plastic plugs (B).
6. Carefully inspect the fixture wires. One is the ground wire (marked with \oplus). The second is the neutral wire (marked with N). The third wire is the live/hot wire (marked with L).
7. Connect the fixture ground wire to the power supply ground wire with wire nut (E).

NOTE: IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.

8. Connect the fixture neutral wire to the power supply neutral wire with wire nut (E).
9. Connect the fixture live/hot wire to the power supply live/hot wire with wire nut (E).

CAUTION: DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, AS SAFETY WILL BE COMPROMISED.

10. Fasten lightbulbs (J) to the lampholders.
11. Attach the glass plates (I1 and I2) to the fixture body (D) with bolts (H) and rubber washers (G) as shown in the illustration on the following page. Place flat surface of glass plates inward, and adjust glass plates to be in level before tightening bolts. Do not overtighten.
12. Restore power to the junction box and test fixture.
13. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

GLASS PLATES INSTALLATION

FIGURE 1

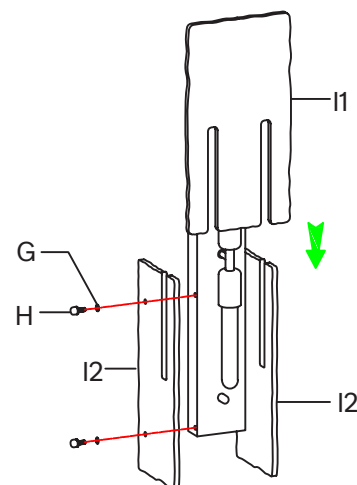


FIGURE 2

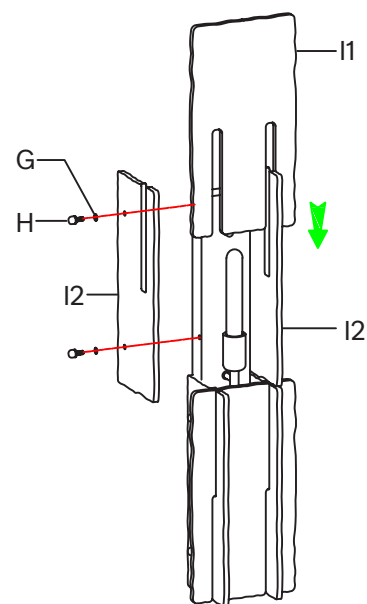


FIGURE 3

