



PARTS ENCLOSED

- (A) Metal Anchors (2)
- (B) Screws (2)
- (C) Lamp Base (1)
- (D) Bulb (1)
- (E) Base Screws (3)
- (F) Mounting Plate (1)
- (G) Mounting Screws (2)

PORTABLE MOUNTING (FIG. 1)

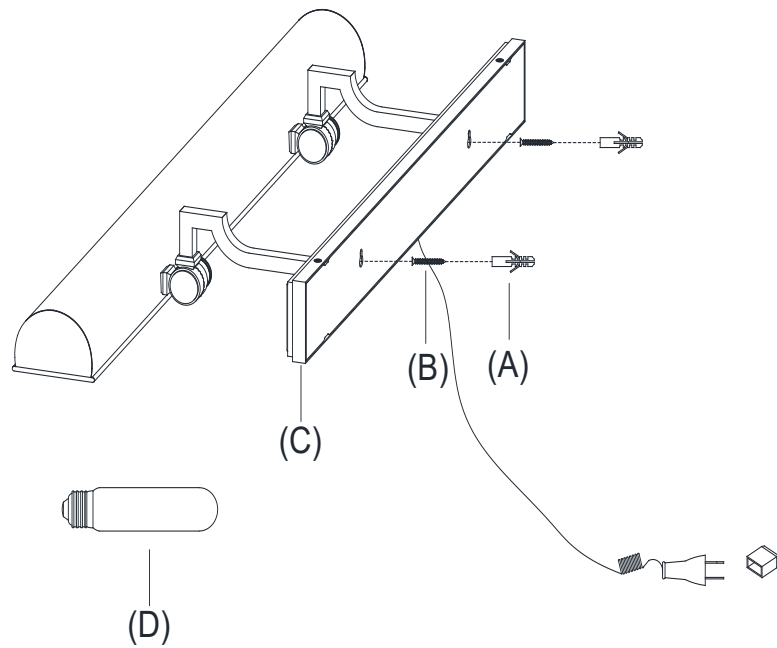

HARDWIRE MOUNTING (FIG. 2)

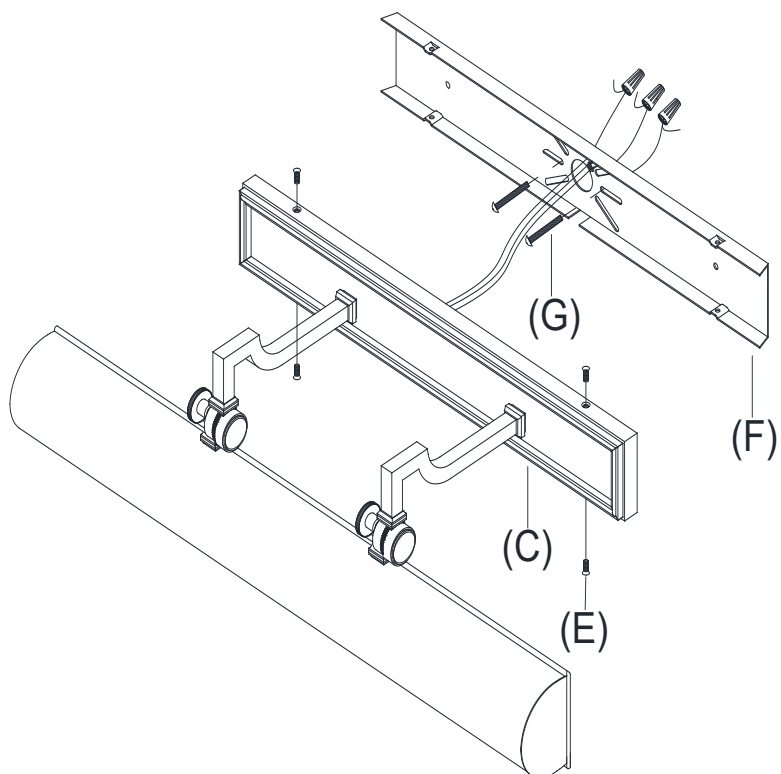

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

For safety purposes, this lamp is equipped with a polarized plug (one blade is wider than the other). If the plug does not fit securely into outlet, do not force it - contact a professional electrician. Use the plug with an extension cord only if it can be fully inserted into the cord's socket. Never alter the plug in any way.

This fixture has been rated for one (1) 40-watt maximum Type T lightbulb (included) or one (1) 9-watt compact fluorescent lightbulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

PORTABLE ASSEMBLY & INSTALLATION (FIG. 1)

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Measure center distance of both hanging keyholes at backside of Lamp Base (C). Mark locations on the wall with the same distance at desired height; make sure both holes are leveled with each other.

ASSEMBLY & INSTALLATION CONT.

3. Drill small holes on each point location on the wall. Each hole should be large enough to accommodate Metal Anchors (A). Push Metal Anchors (A) into the holes in the wall.
4. Insert both Mounting Screws (B) into Metal Anchors (A). Make sure both screw heads with 1/8" threads are visible.
5. Hook Lamp Base (C) onto both heads of Mounting Screws (B).
6. Insert Bulb (D) into the socket.

HARDWIRE ASSEMBLY & INSTALLATION (FIG. 2)

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Follow Step 1 of PORTABLE ASSEMBLY.
2. Guide the wires from the wall outlet box through the center hole in Mounting Plate (F). Affix Mounting Plate (F) to the wall outlet box with Mounting Screws (G).
3. Cut the wire 12" away from Fixture Base (C).
4. Attach the fixture ground wire and house ground wire (usually green insulation or bare wire) to wall outlet box with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
5. Connect both neutral wires (white) to the neutral outlet wire (usually white insulation) with a plastic wire connector and wrap the connection with electrical tape.
6. Connect both hot wires (black) to the hot outlet box wire (usually black insulation) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
7. Attach Fixture Base (C) to the affixed Mounting Plate (F) and secure with Base Screws (E).
8. Insert Bulb (D) into the socket.
9. Assembly is complete.


CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.


PARTS ENCLOSED

- (A) Metal Anchors (2)
- (B) Screws (2)
- (C) Lamp Base (1)
- (D) Bulb (1)
- (E) Base Screws (3)
- (F) Mounting Plate (1)
- (G) Mounting Screws (2)

PORTABLE MOUNTING (FIG. 1)

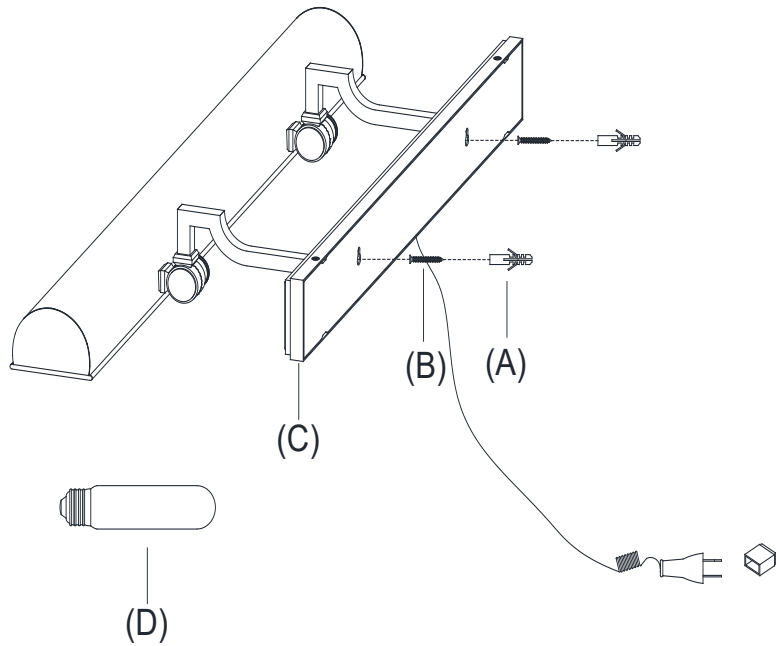

HARDWIRE MOUNTING (FIG. 2)

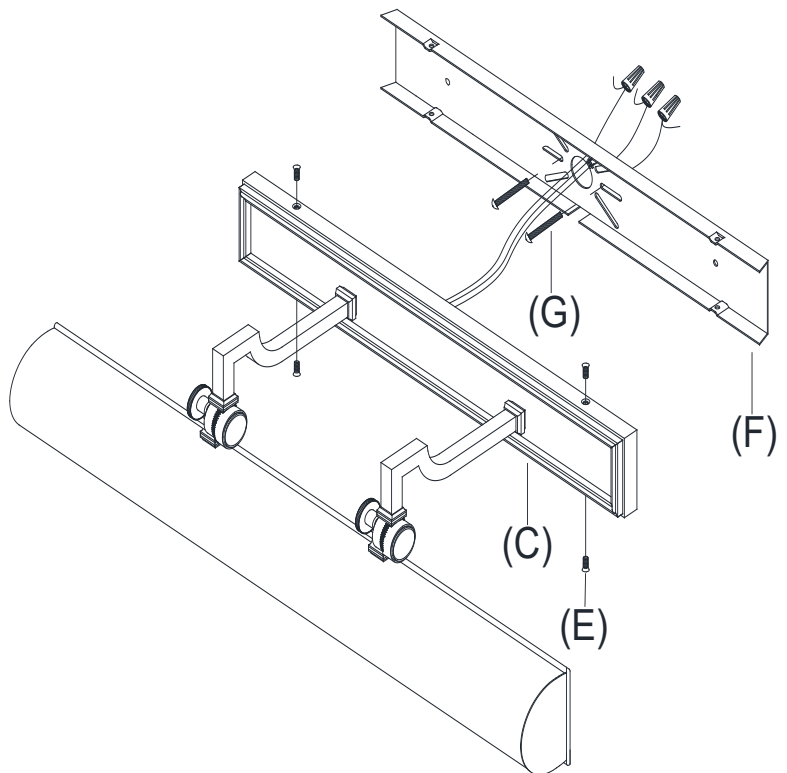

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

For safety purposes, this lamp is equipped with a polarized plug (one blade is wider than the other). If the plug does not fit securely into outlet, do not force it - contact a professional electrician. Use the plug with an extension cord only if it can be fully inserted into the cord's socket. Never alter the plug in any way.

This fixture has been rated for one (1) 40-watt maximum Type T lightbulb (included) or one (1) 9-watt compact fluorescent lightbulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

PORTABLE ASSEMBLY & INSTALLATION (FIG. 1)

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Measure center distance of both hanging keyholes at backside of Lamp Base (C). Mark locations on the wall with the same distance at desired height; make sure both holes are leveled with each other.

ASSEMBLY & INSTALLATION CONT.

3. Drill small holes on each point location on the wall. Each hole should be large enough to accommodate Metal Anchors (A). Push Metal Anchors (A) into the holes in the wall.
4. Insert both Mounting Screws (B) into Metal Anchors (A). Make sure both screw heads with 1/8" threads are visible.
5. Hook Lamp Base (C) onto both heads of Mounting Screws (B).
6. Insert Bulb (D) into the socket.

HARDWIRE ASSEMBLY & INSTALLATION (FIG. 2)

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Follow Step 1 of PORTABLE ASSEMBLY.
2. Guide the wires from the wall outlet box through the center hole in Mounting Plate (F). Affix Mounting Plate (F) to the wall outlet box with Mounting Screws (G).
3. Cut the wire 12" away from Fixture Base (C).
4. Attach the fixture ground wire and house ground wire (usually green insulation or bare wire) to wall outlet box with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
5. Connect both neutral wires (white) to the neutral outlet wire (usually white insulation) with a plastic wire connector and wrap the connection with electrical tape.
6. Connect both hot wires (black) to the hot outlet box wire (usually black insulation) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
7. Attach Fixture Base (C) to the affixed Mounting Plate (F) and secure with Base Screws (E).
8. Insert Bulb (D) into the socket.
9. Assembly is complete.


CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.


PARTS ENCLOSED

- (A) Metal Anchors (2)
- (B) Screws (2)
- (C) Lamp Base (1)
- (D) Adjustment Keys (2)
- (E) Mounting Plate (1)
- (F) Mounting Screws (2)
- (G) Base Screws (4)
- (H) Lamp Shade (1)
- (J) Bulbs (2)

PORTABLE MOUNTING (FIG. 1)

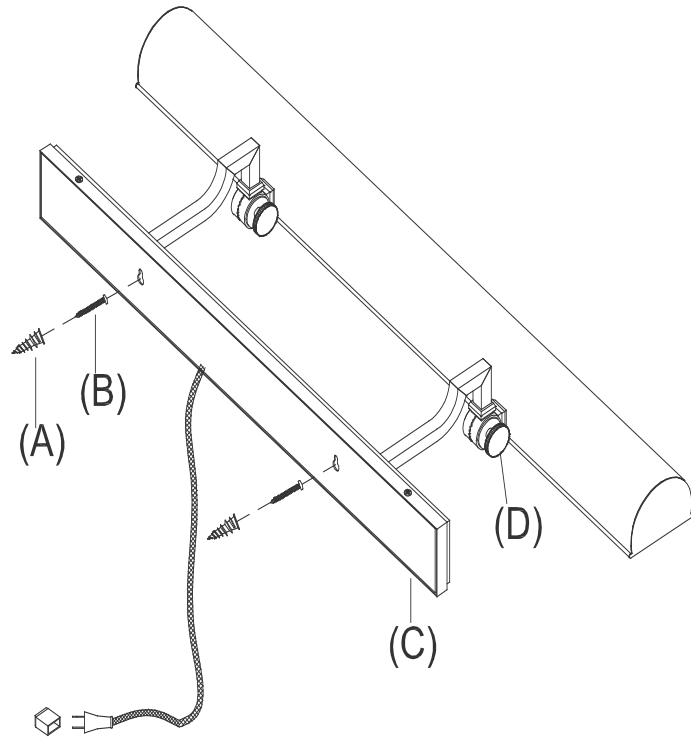

HARDWIRE MOUNTING (FIG. 2)

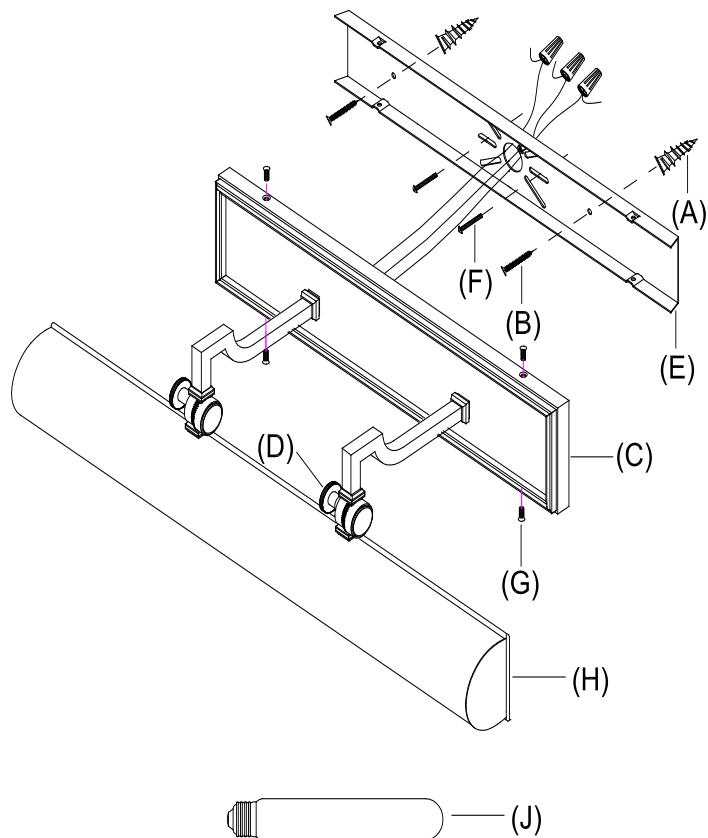

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

For safety purposes, this lamp is equipped with a polarized plug (one blade is wider than the other). If the plug does not fit securely into outlet, do not force it - contact a professional electrician. Use the plug with an extension cord only if it can be fully inserted into the cord's socket. Never alter the plug in any way.

This fixture has been rated for two (2) 40-watt maximum Type T lightbulbs (included) or two (2) 9-watt compact fluorescent lightbulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

PORTABLE ASSEMBLY & INSTALLATION (FIG.1)

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Measure center distance of both hanging keyholes at backside of Lamp Base (C). Mark locations on the wall with the same distance in desired height; make sure both holes are level with each other.
3. Drill small holes on each point location on the wall. Each hole should be large enough to accommodate Metal Anchors (A). Push Metal Anchors (A) into the holes in the wall.

ASSEMBLY & INSTALLATION CONT.

4. Insert both Mounting Screws (B) into Metal Anchors (A). Make sure both screw heads with 1/8" threads are visible.
5. Hook Lamp Base (C) onto both heads of Mounting Screws (B).
6. Insert Bulbs (J) into each of the sockets.

HARDWIRE ASSEMBLY & INSTALLATION (FIG.2)

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Follow Step 1, 2 and 3 of PORTABLE ASSEMBLY.
2. Guide the wires from the wall outlet box through the center hole in Mounting Plate (E). Affix Mounting Plate (E) to the wall outlet box. Insert Screws (B) into Metal Anchors (A) and Mounting Screws (F) and secure Mounting Plate (E) to the wall.
3. Cut the wire 12" away from Fixture Base (C)
4. Attach the fixture ground wire and house ground wire (usually green insulation or bare wire) to wall outlet box with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
5. Connect both neutral wires (white) to the neutral outlet wire (usually white insulation) with a plastic wire connector and wrap the connection with electrical tape.
6. Connect both hot wires (black) to the hot outlet box wire (usually black insulation) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
7. Attach Fixture Base (C) to the affixed Mounting Plate (E) and secure with Base Screws (G).
8. Insert Bulbs (J) into each of the sockets.
9. Assembly is complete.

ADJUSTMENT INSTRUCTIONS

1. Loosen Adjustment Keys (D).
2. Adjust Shade (H) to the desired angle.
3. Tighten Adjustment Keys (D) in place.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.