

RH

METAL FRAMED MIRROR

ASSEMBLY AND INSTALLATION INSTRUCTIONS

ENGLISH


METAL FRAMED MIRROR

PARTS INCLUDED



(A) Cleat

(B) Mirror (with pre-installed hanging hardware)

A



B

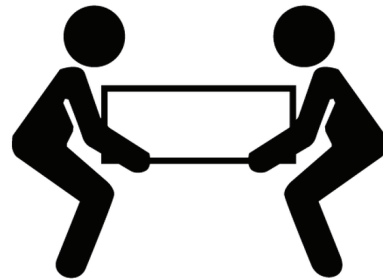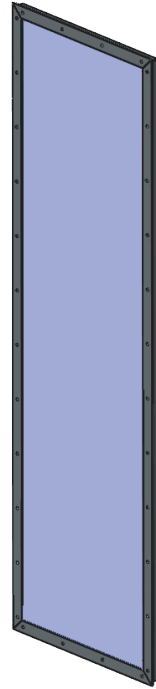

WARNING

STORE MIRROR ACCORDING TO CARTON MARKINGS. DO NOT LAY FLAT, DO NOT STACK OBJECTS ON CARTON.

SAFETY INSTRUCTIONS

1. Mirrors with any dimension over 40" (102cm) should be handled by a minimum of two people.
2. Do not carry mirror horizontally. Always carry vertically and sideways to decrease chance of breakage (as shown).

IMPORTANT SAFETY INSTRUCTIONS





1. Do not place heavy objects on top.
2. Never sit on, stand on or otherwise apply heavy pressure to the product.
3. Do not allow children to play on or around the product.

SAFETY AND PRE-INSTALLATION INFORMATION

1. Professional installation is recommended.
2. To install, you will need to utilize a stud finder (not included) to establish if there is a stud in the desired location for both hanging and leaning installations. Installing the cleat (A) into at least one stud is recommended.
3. You will need to purchase the proper screws and anchors for your wall substrate prior to installation.
4. You will need a level, screwdriver or drill, hammer, measuring tape, and a pencil (not included) to complete self-installation.
5. Non-round mirrors can be installed in a leaning position. This can be achieved with the attached cleat (A) or the anti-tip hardware. You can install both for extra security. For mirrors over 40" (102cm) tall, it is recommended that you do not lean your mirror without utilizing one of the above mentioned security methods.

INSTALLATION OF MIRROR

- 1A. For a leaning installation, attach the anti-tip rope with a screw into a stud or anchor to properly attach it to the wall to prevent it from falling over. Lean mirror as desired.
- 1B. After determining where you would like to hang the mirror, use a level to draw a line where the cleat (A) will hang.
- 2B. Take the wall cleat (A) and align the bottom of cleat with the line you marked. Next, mark the center of each screw hole on the wall to install anchors and screws.
- 3B. Install substrate appropriate anchors. Attach cleat (A) to the wall starting in the center and moving outward.
- 4B. Align mirror cleats with wall cleats and hang. You can slide the mirror side to side on the cleat to adjust, if necessary.

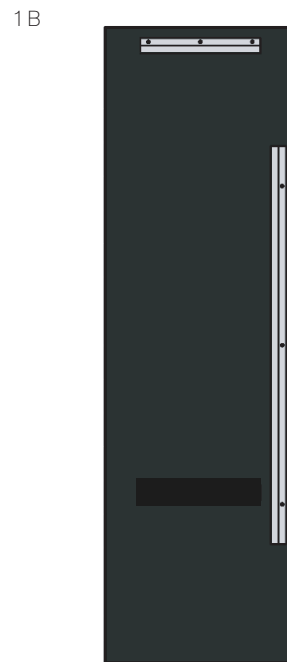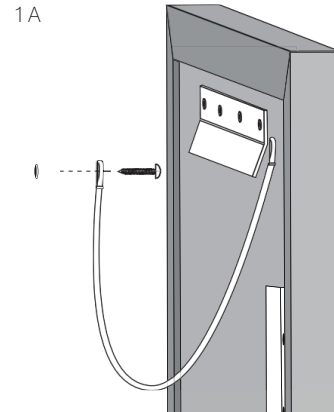

WARRANTY

Your product comes with a limited 90 day manufacturer's warranty that covers any defects in material, workmanship under normal use and maintenance during the warranty period. We will repair the product at no charge, using new or refurbished replacement parts. The warranty does not cover conditions, malfunctions or damage resulting from negligence, improper maintenance, care, storage, shipping, or modification by the end user.

CARE INSTRUCTIONS

To maintain and protect the finish on any metal parts, clean with a soft, damp cloth only. Glass should be cleaned with glass cleaner and a soft cloth. It is advised to never clean metal parts with an abrasive cleaner. While metal parts will age and change color over time, this process will be affected by improper care or maintenance.