


CHEVALIER FLUSHMOUNT

PARTS ENCLOSED

- (A) Metal Anchors (3)
- (B) Mounting Plate (1)
- (C) Mounting Screws (2)
- (D) Wood Screws (3)
- (E) Fixture Base (1)
- (F) Cap Nuts (4)
- (G) Glass Panel (1)
- (H) Set Screws (3)
- (I) Lantern Box (1)
- (J) Light Bulbs (3)
- (K) Allen Wrench (1)
- (L) Set Screws (3)
- (M) Washers (3)

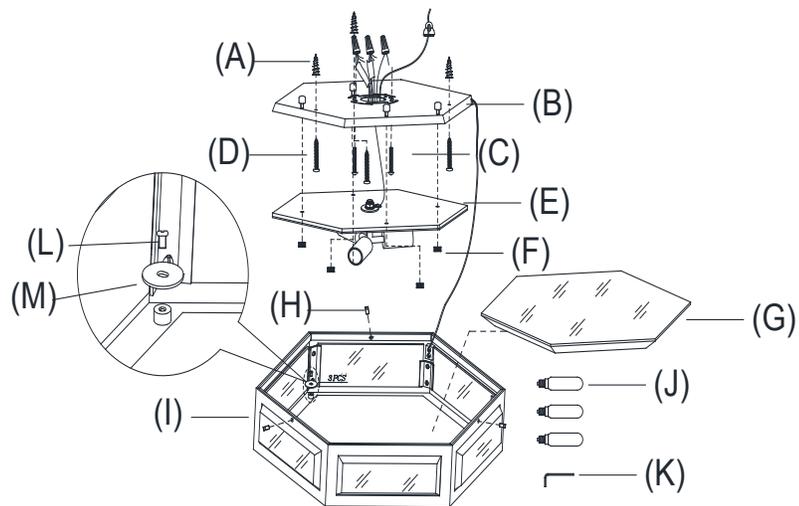

CHEVALIER FLUSHMOUNT

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to three (3) 40-Watt maximum Type T bulbs (J) (25-Watt Type T light bulb included) OR three (3) 9-Watt Compact Fluorescent light bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

- Carefully remove all parts from the box and remove all plastic covering.
- Remove Mounting Plate (B) from the Fixture Base (E) by unscrewing Cap Nuts (F).
- Place Mounting Plate (B) at desired location on the wall. Mark center point locations for three hanging holes with a pencil. Remove Mounting Plate (B).
- Drill small holes on each point location on the ceiling; each hole should be large enough to accommodate the Metal Anchors (A). Push Metal Anchors (A) into the holes on the wall.
- Attach Mounting Plate (B) to the ceiling outlet box by aligning the holes and secure by inserting Wood Screws (D) to the Metal Anchors (A) and Mounting Screws (C) to the wall outlet box.
- Connect the safety steel wire from the fixture and the safety cable from the ceiling. See illustration.
- Attach the fixture ground wire (GREEN) to the ground wire from the outlet box (usually green) with a metal wire connector and wrap the connection with electrical tape.
- Connect both fixture hot wires (BLACK) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape.
- Connect the fixture neutral wires (WHITE) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
- Attach Fixture Base (E) to the affixed Mounting Plate (B) and secure with cap nuts (F).
- Insert Bulbs (J) into the sockets.
- Remove Set Screws (L) and Washers (M) from Lantern Box (I). Insert Glass Panel (G) into Lantern Box and secure by replacing Washers (M) and Set Screws (L).
- Attach Lantern Box (I) with Glass Panel (G) to Fixture Base (E) and secure with Set Screws (H). Tighten with Allen Wrench (K).
- Restore power to outlet box and check operation of fixture.
- Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on your lamp. Just wipe clean with a soft cloth.

CHEVALIER FLUSHMOUNT

SAFETY CABLE ASSEMBLY

1. Remove Hex Nut from Cable Lock Nut and pull Cable Lock Nut from Safety Cable.
2. Join fixture safety cable with safety cable from ceiling and wrap both safety cables around the cable lock nut.
3. Secure by tightening both hex nuts until tight.

