

RH


GLACE LINEAR PENDANT 49IN

PARTS ENCLOSED

- (A) Junction Box (Not included.) 50LB. MIN. FIXTURE RATED
- (B) Mounting Screws (Not included.) (4)
- (C) Wire Nut (3)
- (D) Ceiling Plate (1)
- (E1) Canopy (1)
- (E2) Bolts (4)
- (F1) Quick link (1)
- (F2) Hang Straight (1)
- (G) Hanging Rod (6)
- (H) Body
- (I) Glass+Spare (104+4)
- (J) Bulb+Spare (11+4)
- (K1) Small Allen Screwdriver (1)
- (K2) Large Allen Screwdriver (1)
- (L1) Short Set Screws Spare parts (2)
- (L2) Long Set Screws Spare parts (2)

PRODUCT DESCRIPTION:

General material: Iron & Glass
Height: 31.7cm (12.5in)
Length: 124.8cm (49.25in)
Width: 38.4 cm (15in)
Weight: 43.8kgs (96.6lbs)
Grounded / Hardwired

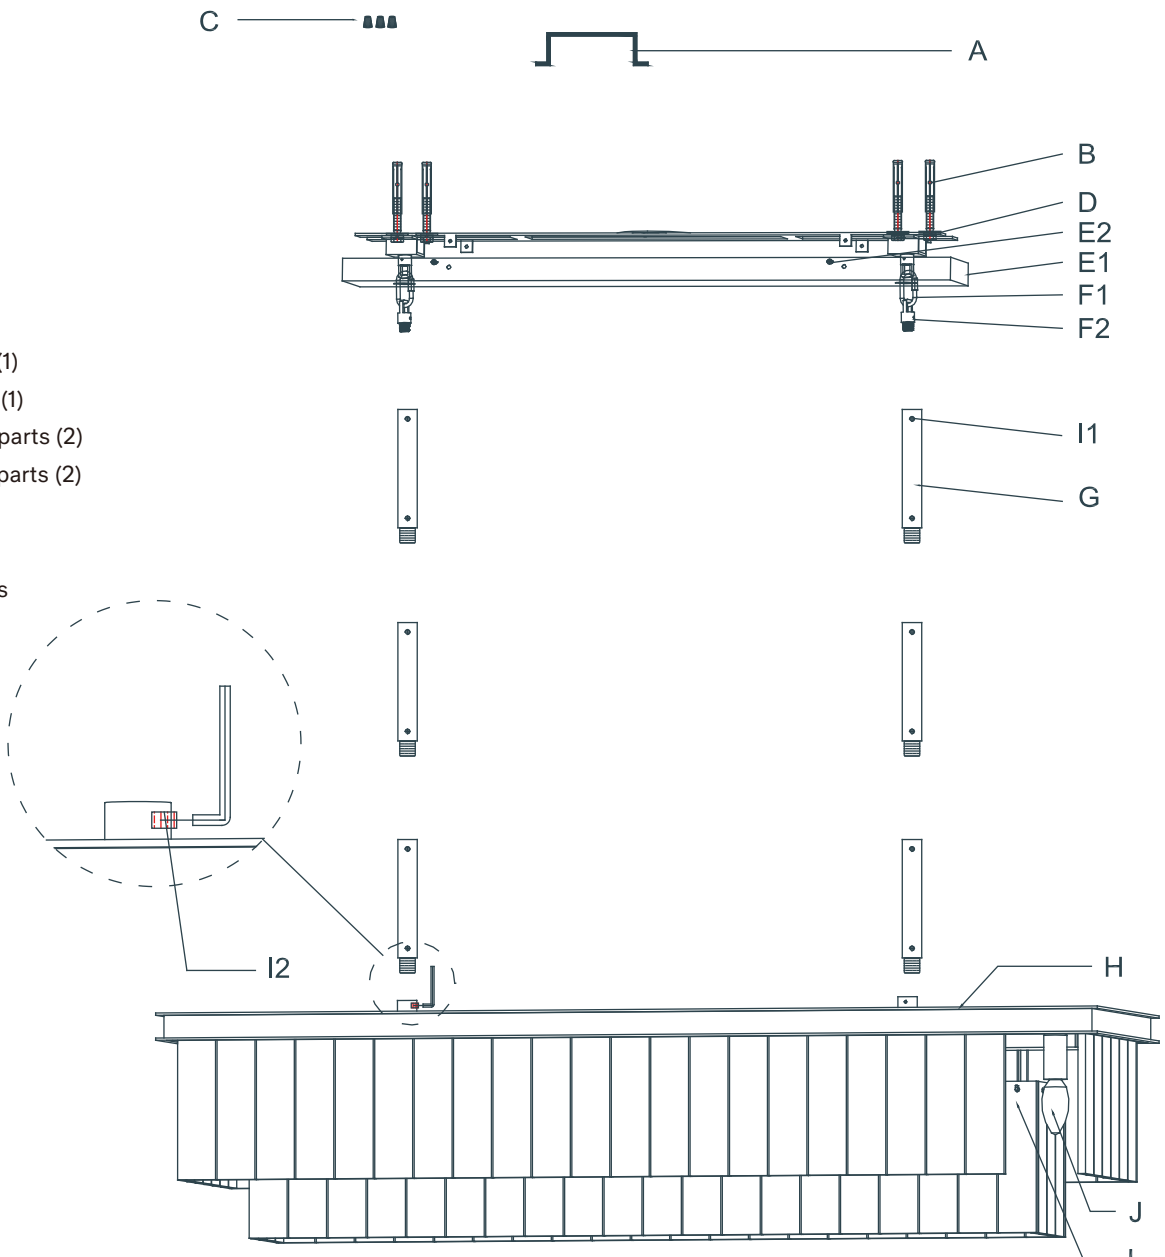

IMPORTANT PLEASE READ**WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.****SAFETY INSTRUCTIONS:**

1. Use an authorized and certified electrician for consultation and installation.
2. The screws need to be screwed into a solid support structure inside the ceiling, which will require professional assistance.
3. This fixture has been rated for 9 x 25-watt maximum standard bulbs.
4. To avoid the risk of fire, do not exceed the recommended wattage.
5. The ceiling must have at least the capacity of 5 times the weight of the ceiling light. For this light, at least a ceiling capacity of 107.5kg (237lb) is required.
6. The manufacturer and distributor accept no liability for incorrect installation.
7. For indoor use only.
8. Keep away from children.

WARNINGS:

1. Turn off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
4. Deviation from instructions may result in a risk of fire or electric shock.

 **WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.

 **WARNING: STRANGULATION HAZARD**

Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

ASSEMBLY & INSTALLATION:

1. Carefully remove all parts from the box and remove all plastic covering.
 2. Turn OFF power to the junction box where the ceiling light will be installed.
 3. Loosen the bolts (E2) from canopy (E1) by large Allen screwdriver (K2) and remove the ceiling plate (D) from canopy (E1).
 4. Attach the ceiling plate (D) to the ceiling with mounting screws (B).
 5. Assemble the hanging rod (G) to hang straight (F2), and tighten the bolts (L1) on hang straight (F2) and hanging rods (G).
- Note: The hanging height is adjustable by using one hanging rod (G) only, or using two or three hanging rods (G) together.
6. Insert the main wire into the hanging rods (G), thread out from hang straight (F2). Fasten hanging rod (G) to body (H), then tighten the bolts (L2) on body (H).
 7. Connect the ground wire from the fixture to the ground junction box wire (A) (usually the green or bare wire) with a wire nut (C) and wrap the connection with electrical tape. Connect the hot wire to the hot junction box wire (A) (usually black or smooth) with a plastic wire nut (C) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (A) (usually white or ribbed) with a plastic wire nut (C) and wrap the connection with electrical tape.
 8. Move the canopy (E1) up to the ceiling, then fasten the bolts (E2).
 9. Attach hang straight (F2) to ceiling plate (D) with quick link (F1). Fasten light bulbs (J) to the lamp holders. Hang the glass (I) to the outermost layer of body (H) first, then proceed from inner layer outwards (H) as drawing.

Note: To ensure safety of chandelier during glass installation, please maintain level of chandelier by ensuring you install glass drops in balanced way on opposite ends of light.

10. Restore power to the junction box and test ceiling light fixture.

CARE INSTRUCTIONS:

1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth / mild soapy solution. Do not use corrosive cleaners.
3. The cable / cord of this ceiling light cannot be replaced; if the cable is damaged, do not use the light.