


# RESTORATION HARDWARE

Thank you for purchasing Restoration Hardware Lighting. Our assortment is crafted with the highest quality details in mind and each collection is clad in one of our signature finish options. Each item's surface is sealed which eliminates the need for polishing and ensures the lasting brilliance of your piece for years to come.

## PARTS ENCLOSED:

- |                        |                     |
|------------------------|---------------------|
| (A) Wire connector     | (G) Face plate      |
| (B) Back plate         | (H) Enclosed screws |
| (C) Dimples            | (I) Socket          |
| (D) Green ground screw | (J) Glass shade     |
| (E) Outlet box screws  | (K) Cup             |
| (F) Ground wire        | (L) Socket ring     |

## Modern Hardware Single

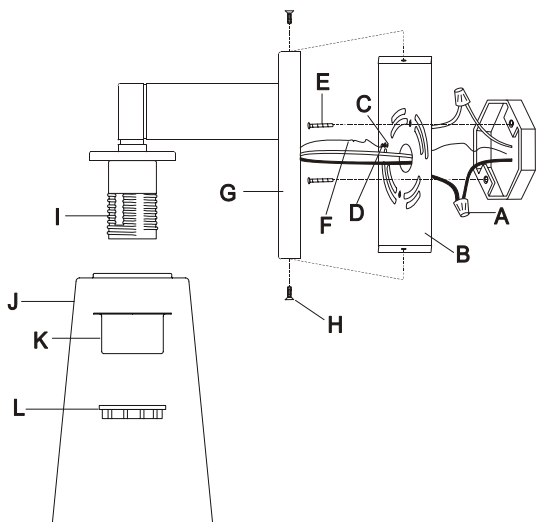

## Direct Wire Installation

## IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN. This fixture has been rated for up to (1) 60-watt maximum Type B bulb (the bulb is included).

To avoid the risk of fire, do not exceed the recommended wattage.

## WARNINGS:

All wires connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your lamp is fully assembled. To reduce the risk of fire, electrical shock or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.

## TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the lamp will be installed.
3. Attach the ground wire (F) from the fixture to the ground junction box wire from the outlet box (usually green or bare wire) with a plastic wire connector and wrap the connection with electrical tape. Screw the green ground screw (D) onto the back plate (B) near the Dimples (C) and wrap the fixture's bare ground wire around the ground screw. Then tighten the screw.
4. Connect the hot wire to the hot junction box wire (usually black) with a plastic wire connector (A) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction wire (usually white) and wrap the connection with electrical tape.
5. Attach the back plate (B) to the outlet box using the outlet box screws (E). Tighten with a screwdriver.
6. Attach the face plate (G) over back plate (B) and secure with the enclosed screws (H).
7. Place the glass shade (J) and cup (K) over the socket (I), and secure with the socket ring (L).
8. Insert the recommended 60-watt Type B bulb (included) into the threaded socket.

## CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap. Do Not use abrasive harsh cleansers or abrasives.