


RESTORATION HARDWARE

MODERN PICTURE LIGHT SCONCE 24IN

PARTS ENCLOSED

- (A) Metal Anchors (4)
- (B) Mounting Screws (4)
- (C) Mounting Brackets (2)
- (D) Adjustment Keys (4)

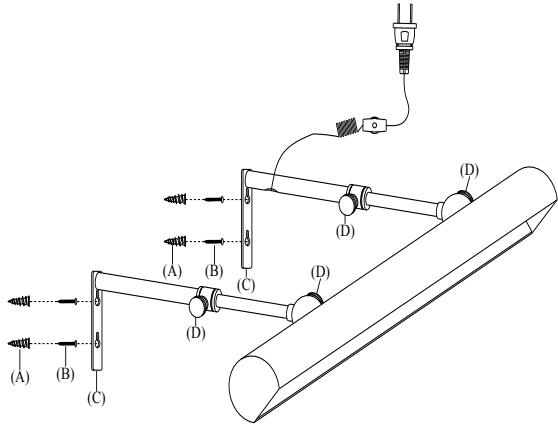

IMPORTANT SAFETY INSTRUCTIONS

For safety purposes, this lamp is equipped with a polarized plug (one blade is wider than the other). If the plug does not fit securely into outlet, do not force it - contact a professional electrician. Use the plug with an extension cord only if it can be fully inserted into the cord's socket. Never alter the plug in any way.

This fixture has been rated for up to two (2) 25-watt maximum Type T bulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.

1. Do not connect electricity until your lamp is fully assembled.
2. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.
5. Please ensure that this item is mounted to a wood or metal wall stud. It cannot be mounted into a hollow wall.

TO ASSEMBLE

1. Carefully remove all parts from the box and remove all plastic covering. Do not discard the outer carton.
2. Place both base plates (C) on wall at desired height. Use a level to make sure the base plates (C) are both vertical and horizontally level.
3. Using a pencil, make a mark in the top center of each keyhole.
4. Drill 1/8" holes into your pencil marks on the wall. For each hole:
 - If you encounter a wall stud, then drive a mounting screw (B) into the hole with a Phillips screwdriver.
 - If you don't encounter a wall stud, drive a metal anchor (A) into the hole using a Phillips screwdriver. Once the metal anchor (A) is flush with the wall surface, drive a mounting screw (B) into the metal anchor (A) using a Phillips screwdriver.
 - In both cases, leave approximately 1/8" of screw threads exposed.
5. Hook both base plates (C) onto mounting screws (B). If the base plates (C) are not snug against the wall, remove them, tighten each screw 1/4 turn, and replace the base plates (C). Repeat until both base plates are snug.
6. Insert the recommended light bulbs into sockets.
7. Plug into proper electrical outlet and test fixture.
8. Assembly is complete.

ADJUSTMENT INSTRUCTIONS

1. Loosen adjustment keys (D) found on stems.
2. Adjust lamp arms and lamp shades to desired height and position.
3. Tighten the adjustment keys (D).

CARE INSTRUCTIONS

Wipe all surfaces with a soft dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.