


## PAUILLAC FABRIC SHADE PENDANT

### PARTS ENCLOSED

- (A) Mounting Strap (1)
- (B) Mounting Loop (1)
- (C) Mounting Screws (2)
- (D) 28 3/8" Connection Rods (2)
- (E) Canopy (1)
- (F) Canopy Ring (1)
- (G) Connectors (9)
- (H) 18" Connection Rods (2)
- (I) 12" Connection Rods (4)
- (J) 6" Connection Rods (2)
- (K) Threaded Joint (1)
- (L) Shades (4) (packed separately)
- (M) Bulbs (4)
- (N) Sockets (4)

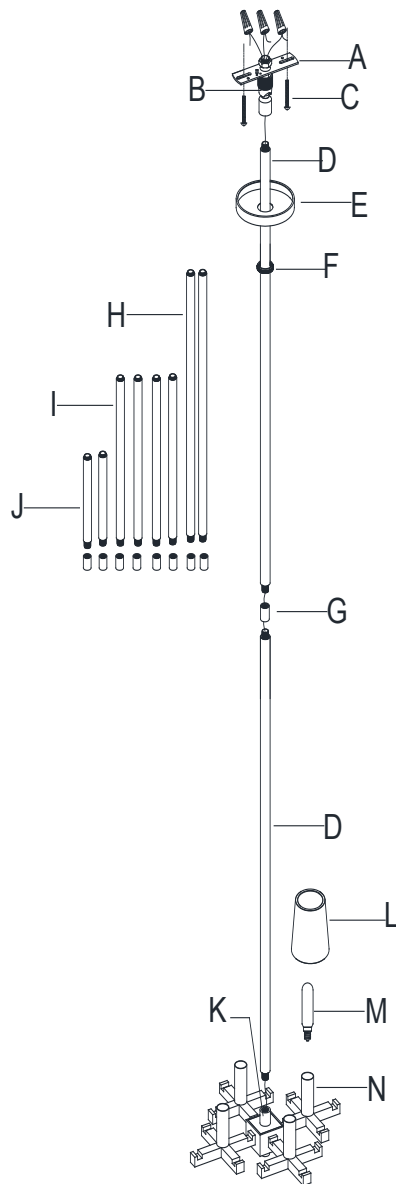

## PAULLAC FABRIC SHADE PENDANT

**IMPORTANT SAFETY INSTRUCTIONS**

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to four (4) 25-Watt max Type T lightbulbs (included) or four (4) 13-Watt compact fluorescent lightbulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.**



**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

**ASSEMBLY & INSTALLATION**

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Determine the hanging length of the pendant. Connect Threaded Joint (K) to some or all Connection Rods (D) (H) (I) (J) and Connectors (G) according to the length needed.
3. Feed the wire through Connection Rods (D) (H) (I) (J).

**ASSEMBLY & INSTALLATION CONT.**

4. Unscrew Canopy Ring (F). Slide Canopy Ring (F) and Canopy (E) onto Connection Rods (D) (H) (I) (J).
5. Thread the inner rod of the top connection rod to the bottom opening of Mounting Loop (C) by turning in a clockwise direction.
6. Affix Mounting Plate (A) to the ceiling and secure with Mounting Screws (C).
7. Gently pull the wire from the ceiling outlet box and allow the wire to hang. Thread the wire through the center hole of Mounting Strap (A).
8. Carefully inspect the pendant's two fixture wires. One has very fine ridges molded into the plastic covering – this is the neutral wire. The second wire's covering is smooth – this is the hot wire. The bare wire is the ground wire.
9. Connect the fixture ground wire to the ground wire (usually bare copper) from the ceiling outlet box using a wire nut. If your house does not have ground wire, then attach the ground wire from the fixture to the green grounding screw inside of the outlet box. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
10. Connect the neutral wire from the fixture with the neutral wire (usually white) from the ceiling outlet box using a wire nut.
11. Connect the hot wire from the fixture with the hot wire (usually black) from the outlet box using a wire nut. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
12. Raise Canopy (E) to the affixed Mounting Strap (A) and secure with Canopy Ring (F).
13. Insert Bulbs (M) into Sockets (N).
14. Place Shades (L) (packed separately) onto the light fixture.
15. Restore power to outlet box and check operation of fixture.
16. Assembly is complete.

**CARE INSTRUCTIONS**

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.