


RH

SAN MARCO 2-TIER ROUND CHANDELIER 22"

PARTS ENCLOSED:

- (A) CEILING BRACKET (1)
- (B) CEILING CANOPY (1)
- (C) HANGING TUBE (1)
- (D) BOLT (3)
- (E) WIRE NUT (3)
- (F) STEEL WIRE (1)
- (G) RING (1)
- (H) SCREW (1)
- (I) CHAIN(1)
- (J)GLASS(52)
- (K)NUTS(104)

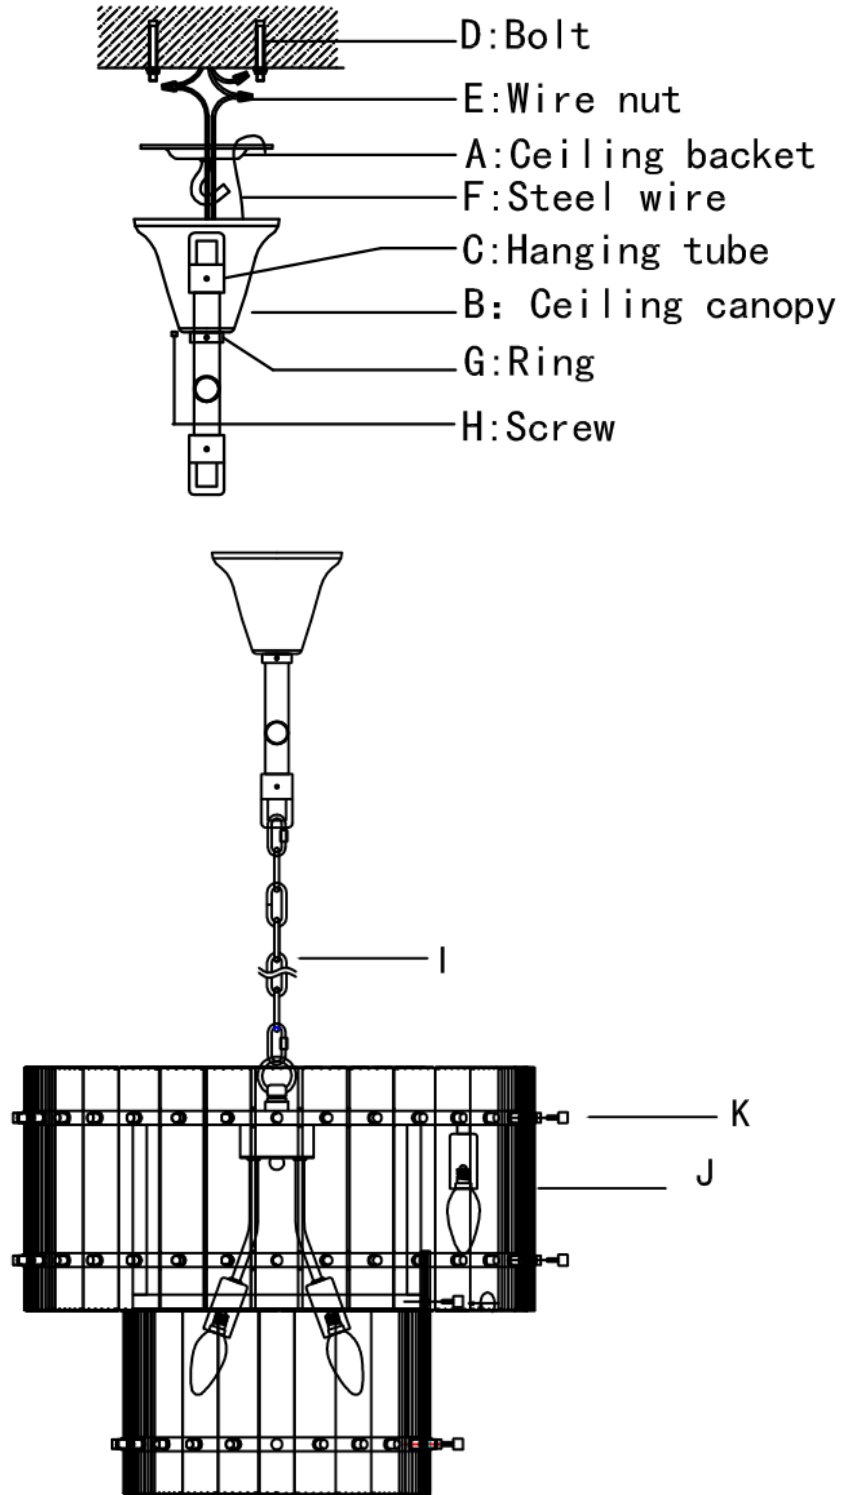



SAN MARCO 2-TIER ROUND CHANDELIER 22"

IMPORTANT PLEASE READ

IMPORTANT INSTRUCTION:

- (1) Use an authorized and certified electrician for consultation and installation. Electrician must be familiar with commercial-type application of very wall lamp and hazards involved. Electrician should install it as per applicable installation code.
- (2) This fixture has been rated for 10x40-watt maximum E12, type B bulb.
- (3) To avoid the risk of fire, do not exceed the recommended wattage.
- (4) The ceiling must have at least the load bearing capacity of 5 times of the weight of the ceiling light. For this light, ceiling should have load bearing capacity of 187lbs, at least.
- (5) The manufacturer and distributor accept no liability for incorrect installation.
- (6) For indoor use only.
- (7) Keep away from children.

WARNINGS:

- (1) Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your wall lamp is fully assembled and installed.
- (2) All wires are connected. Do not remove the wall lamp from its packaging by pulling on the power cord, as a bad connection may result.
- (3) To reduce the risk of fire, electrical shock, or personal injury, always turn off the light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
- (4) Deviation from instruction may result in a risk of fire or electric shock.

THIS IS NOT A TOY. THE PRODUCT HAS NO PLAY VALUE.

ASSEMBLY & INSTALLATION:

- (1) Carefully remove the parts from the carton and place them on a flat surface. Please make sure that you have all the parts indicated before you begin to assemble this item.
- (2) Determine the hanging length of chandelier. Connect the chain according to the height needed.
- (3) Remove ceiling bracket (A) from ceiling canopy (B) by unscrewing the ring (G).
- (4) Fasten the ceiling bracket (A) onto the Outlet Box by using the bolt (D) .
- (5) Thread the wires through the component (suspension eye), Ceiling canopy (B) and connect the 3 power wires. The slick wire is the live wire, the coarse wire is the neutral wire and the brass wire is the earth wire. And fixed the extras Steel wire(F) to the ceiling with wire lock. It can fixed the chandelier stronger.
- (6) The hanging tube(C) through the suspension eye and Fix to the ceiling bracket and fix the ring (G) securely.
- (7) Check whether the connection is sufficiently strong. Carefully lower the lamp until the chain are taut.
- (8) Install 10pcs 40-Watt maximum Type B Candelabra incandescent light bulb into the socket of the fixture. **DO NOT EXCEED THE SPECIFIED WATTAGE.**
- (9) Install 52pcs decoration glass (J) on the lamp frame with nuts(K).

CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.
Wipe clean with a soft cloth.