
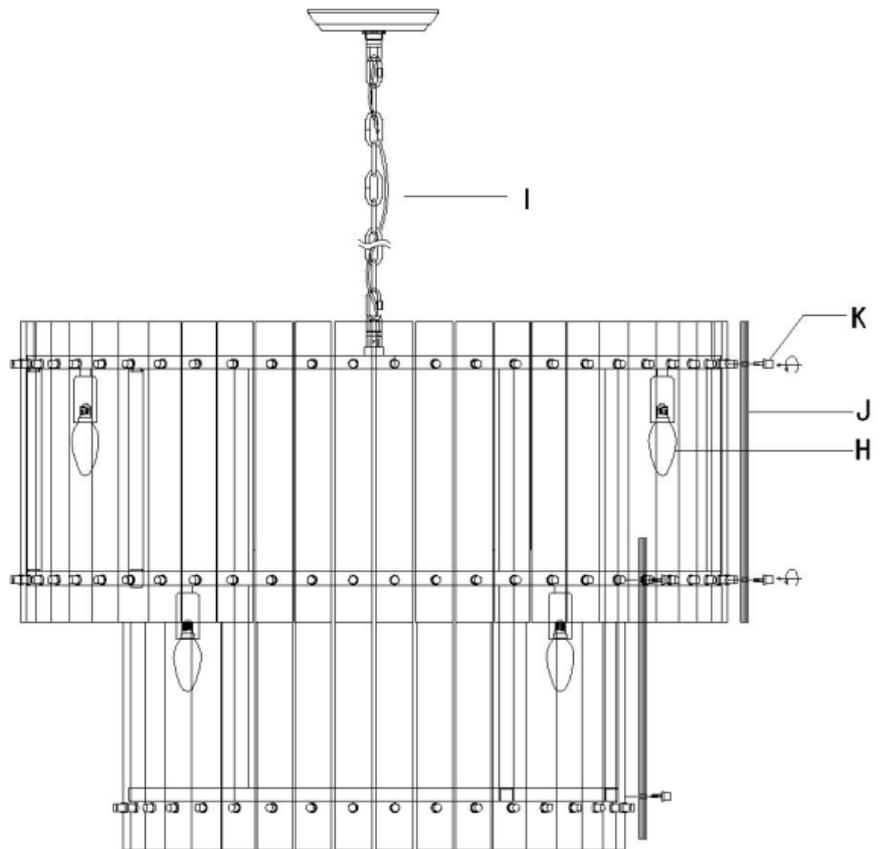


RH

SAN MARCO 2-TIER ROUND CHANDELIER 36"

PARTS ENCLOSED:

- (A) CEILING BRACKET (1)
- (B) CEILING CANOPY (1)
- (C) HANGING TUBE (1)
- (D) BOLT (3)
- (E) WIRE NUT (3)
- (F) STEEL WIRE (1)
- (G) RING (1)
- (H) BULB(16)
- (I) CHAIN(1)
- (J) GLASS (119)
- (K) NUT (238)

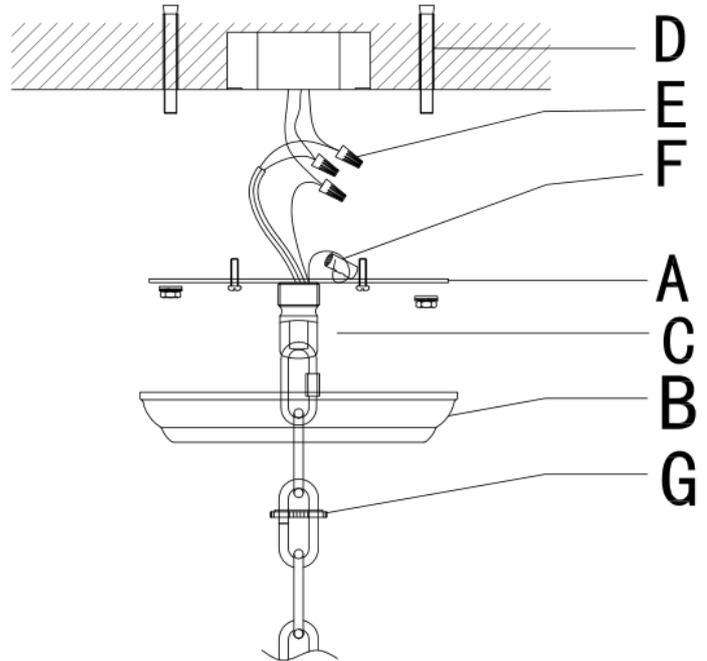



SAN MARCO 2-TIER ROUND CHANDELIER 36"

IMPORTANT PLEASE READ

IMPORTANT INSTRUCTION:

- (1) Use an authorized and certified electrician for consultation and installation. Electrician must be familiar with commercial-type application of very wall lamp and hazards involved. Electrician should install it as per applicable installation code.
- (2) This fixture has been rated for 16x40-watt maximum E12, type Bbulb.
- (3) To avoid the risk of fire, do not exceed the recommended wattage.
- (4) The ceiling must have at least the load bearing capacity of 5 times of the weight of the ceiling light. For this light, ceiling should have load bearing capacity of 487lbs, at least.
- (5) The manufacturer and distributor accept no liability for incorrect installation.
- (6) For indoor use only.
- (7) Keep away from children.

WARNINGS:

- (1) Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your pendant lamp is fully assembled and installed.
- (2) All wires are connected. Do not remove the wall lamp from its packaging by pulling on the power cord, as a bad connection may result.
- (3) To reduce the risk of fire, electrical shock, or personal injury, always turn off the light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
- (4) Deviation from instruction may result in a risk of fire or electric shock.

THIS IS NOT A TOY. THE PRODUCT HAS NO PLAY VALUE.

ASSEMBLY & INSTALLATION:

- (1) Carefully remove the parts from the carton and place them on a flat surface. Please make sure that you have all the parts indicated before you begin to assemble this item.
- (2) Determine the hanging length of chandelier. Connect the chain according to the height needed.
- (3) Remove ceiling bracket (A) from ceiling canopy (B) by unscrewing the ring (G).
- (4) Fasten the ceiling bracket (A) onto the Outlet Box by using the bolt (D) .
- (5) Thread the wires through difference rings of chain from bottom to top by 5 times,then through component(suspension eye), Ceiling canopy (B) and connect the 3 power wires.Use the wiring cap (E) to connect the SPT-1 wire and bare copper wire to the power wire on ceiling. The black wire with markings or letters is live wire, connect to the black (positive) wire. The black wire without markings or letters is neutral wire, connect to the other the white (neutral) wire. Copper wire is the ground wire, connect to the other ground wire. Then secure to wrap by the insulated rubber tape(not included).
- (6) Fix chain(I) to the hanging ring of ceiling bracket ring(C),then fix the ring (G) securely.
- (7) Check whether the connection is sufficiently strong. Carefully lower the lamp until the chain are taut.
- (8) Install 16pcs 40-Watt maximum Type B Candelabra incandescent light bulb into the socket of the fixture. **DO NOT EXCEED THE SPECIFIED WATTAGE.**
- (9) Install 119pcs decoration glass (J) on the lamp frame with nuts(K).

CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.
Wipe clean with a soft cloth.