


RESTORATION HARDWARE

DUOMO MEDIUM SCONCE

PARTS ENCLOSED

- (A) Metal Anchors (2)
- (B) Mounting Plate (1)
- (C) Wall Screws (2)
- (D) Mounting Screws (2)
- (E) Base Screws (4)
- (F) Lantern Box (1)
- (G) (L) Glass Panel (4)
- (H) Thumbscrew (1)
- (J) Metal Tabs (22)
- (K) Set Screws (22)

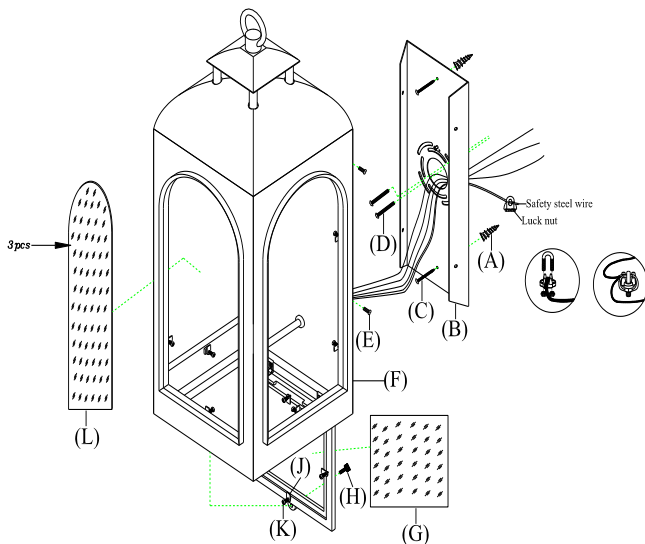

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to one (1) 100-watt maximum Type A bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. Do not connect electricity until your lamp is fully assembled.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.
4. Do not touch bulb when fixture is turned on or look directly at lit bulb.
5. Keep flammable materials away from lit bulb.

TO ASSEMBLE:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!
2. Carefully remove all parts from the box and remove all metal covering.
3. To install glass panel (L) to each frame of lantern box (F), removing all metal tabs (J) by unscrewing set screws (K) and set aside. Insert a glass panel into one frame and insert the second glass panel to the next frame, replace metal tabs (J) and followed with set screws (K) to secure glass panels (L) to the frame.
4. Repeat the procedure for the rest glass panels (L) and (G).
5. Remove mounting plate (B) from the lantern box (F) by unscrewing base screws (E).
6. Place mounting plate (B) at desired location on the wall. Mark center points locations for two hang holes with a pencil. Remove mounting plate (B).
7. Drill small holes on each point location on the wall, each hole should be large enough to accommodate the metal anchors (A). Push metal anchors (A) into the holes on the wall.
8. Attach mounting plate (B) to the wall outlet by aligning the holes and secure by inserting wall screws (C) to the metal anchors (A) and mounting screws (D) to the wall outlet box.
9. Wrap both fixture safety cable and ceiling safety cable to lock nut and secure with nuts as shown. (See left illustration)
10. Attach the fixture ground wire (green) to the ground wire from the outlet box (usually green) with a metal wire connector and wrap the connection with electrical tape.
11. Connect the hot wire (black wire) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape.
12. Connect the neutral wire (white wire) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
13. Attach lantern box (F) to mounting plate (B), tighten with base screws (E).
14. Loosen thumbscrew (H), and open the door.
15. Insert light bulb (not included) into socket.
16. Close the door, and secure the thumbscrew (H). (See left illustration)
17. Restore power to outlet box and check operation of fixture.
18. Assembly is complete.

CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.