


ANTLER CHANDELIER 60" ASSEMBLY INSTRUCTIONS

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. IF YOU ARE UNSURE ABOUT YOUR CEILING TYPE OR WHAT MOUNTING METHOD YOU SHOULD USE, CONSULT A QUALIFIED PROFESSIONAL.

PARTS ENCLOSED:

- (A) GROUND SCREW (1)
- (B) MOUNTING BRACKET (1)
- (C) LOCK NUT (1)
- (D) THREADED JOINT (2)
- (E) CANOPY (1)
- (F) LOOP COLLAR (1)
- (G) CANOPY LOOP (1)
- (H) FIXTURE LOOP (1)
- (I) CHAIN (1)
- (J) FIXTURE (1) (NOT PICTURED)
- (K) LIGHT BULBS (12) (NOT PICTURED)
- (L) MOUNTING SCREWS (2) (NOT PICTURED)

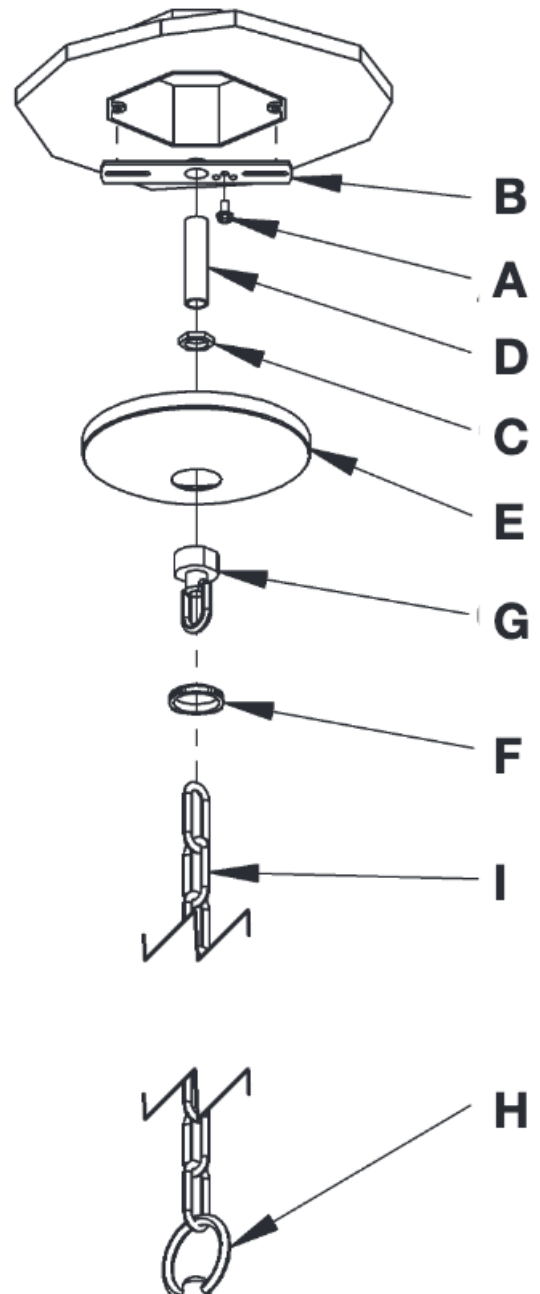

ANTLER CHANDELIER 60" ASSEMBLY INSTRUCTIONS

IMPORTANT PLEASE READ**WE RECOMMEND INSTALLATION
BY A LICENSED ELECTRICIAN.****SAFETY INSTRUCTIONS:**

This fixture must be mounted to the ceiling independent of an outlet box. Your ceiling may require modification to allow the mounting plate to be secured to a structural member. This fixture **MUST NOT** be secured using any type of hollow ceiling anchor, such as a toggle bolt.

This fixture has been rated for up to twelve (12) 40-watt maximum E-12 Candelabra Bulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

All wires are connected. When unpacking and installing, be careful not to pull wires as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulbs. Do not touch the bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

ASSEMBLY & INSTALLATION:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Determine the hanging length of chandelier. Remove links from chain if needed. Leave the top link and bottom link open to hook onto canopy loop (G) and the fixture loop (H).
3. Run wire from chandelier up chain, through the loop collar (F), through the canopy loop (G), through the canopy (E), through the lock nut (C), and through the threaded joint (D). Leave it all sitting for now.
4. Attach mounting bracket (B) to ceiling and secure with mounting screws (L).
5. Lift entire unit assembled in step 3, and first push wire end through the hole in mounting plate (B). Then screw the threaded joint (D) into the mounting plate. Then attach the lock nut (C) to the threaded joint. Then lift up the canopy (E) and screw the canopy loop onto the bottom of the threaded joint. Screw the loop collar (F) onto the canopy loop.
6. Connect the chain to the canopy loop and the fixture loop. The chandelier should hang freely at this point.
7. Leave everything loose enough to attach the wiring up at the ceiling.
8. Carefully inspect the chandelier's fixture wire. One side has very fine ridges molded into the plastic covering – this is the **NEUTRAL WIRE**. The second side's covering is smooth – this is the **HOT WIRE**.
9. Connect the **NEUTRAL WIRE** from your fixture with the neutral wire (usually white) from your ceiling box using a wire nut.
10. Connect the **HOT WIRE** from your fixture with the hot wire (usually black) from your outlet box using a wire nut. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.**
11. Tuck the wire connection neatly into the ceiling outlet box.
12. Attach canopy (E) with light fixture to affixed Mounting Plate (B) and secure with Loop Collar (F).
13. Insert the recommended bulbs into sockets.
14. Assembly is complete.