


# RESTORATION HARDWARE

## EUROPEAN FACTORY CAGED PENDANT

### PARTS ENCLOSED

- (A) Mounting Strap (1)
- (B) Mounting Screw (2)
- (C) Nipple (1)
- (D) Chain Mounting Loop (1)
- (E) Canopy (1)
- (F) Canopy Ring (1)
- (G) Screws (2)
- (H) "U" Chain (2)
- (J) Chain (1)
- (K) Top Loop (1)
- (L) Shade Holder (1)
- (M) Door With Glass Shade (1)
- (N) Set Screw (1)
- (O) Light Bulb (1)

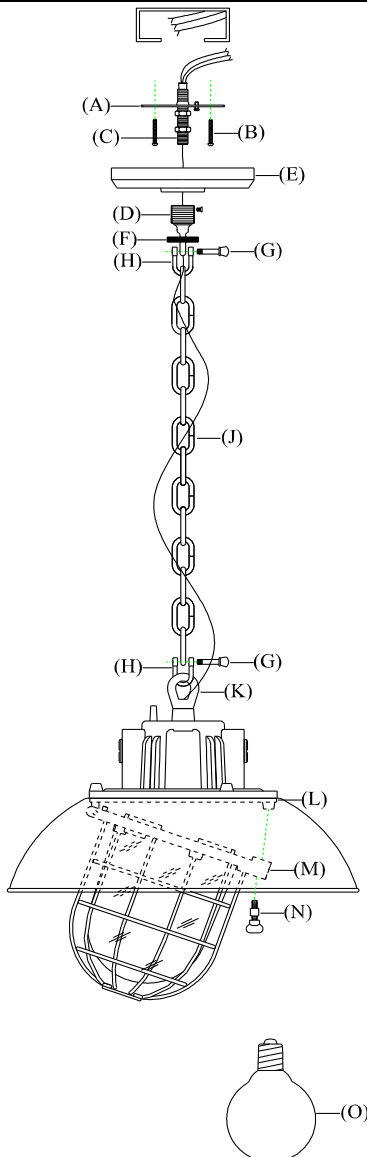

### IMPORTANT SAFETY INSTRUCTIONS

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to one (1) 60-watt maximum Type G25 light bulb (O) (included) OR 13W Compact Fluorescent bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

### WARNINGS

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. Do not connect electricity until your lamp is fully assembled.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.
4. Do not touch bulb when fixture is turned on or look directly at lit bulb.
5. Keep flammable materials away from lit bulb.
6. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

### TO ASSEMBLE

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the pendant will be installed.
3. Screw "U" chain (H) to top loop (K) and mounting loop (D) by screws (G).
4. Feed wire through chain (J) and mounting loop (D), canopy (E) and nipple (C).
5. Slip canopy ring (F) and canopy (E) on chain (J).
6. Attach mounting strap (A) to mounting outlet box with mounting screws (B) and insert top thread nipple (C) in mounting strap (A).
7. Attach chain mounting loop (D) to thread nipple (C).
8. Attach the fixture ground wire (green wire) to the ground wire from the outlet box (usually green or bare wire) with a plastic wire connector and wrap the connection with electrical tape.
9. Connect the hot wire (black wire) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape.
10. Connect the neutral wire (white wire) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
11. Tuck these wire connections neatly into the ceiling outlet box.
12. Slip canopy (E) to ceiling and secure threaded canopy ring (F).
13. Loosen set screw (N) from shade holder (L), and open the door with glass shade (M). Insert recommended bulb into threaded socket.
14. Close the door (M) and secure with set screw (N).
15. Restore power to outlet box and check operation of fixture.
16. Assembly is complete.

### CARE INSTRUCTIONS

Avoid the use of all polishers, cleaners, and abrasives, as they will damage the finish of your lamp. To remove dust or fingerprints, wipe gently with a soft, clean cloth.