


RESTORATION HARDWARE

FRENCH NAUTICAL SCONCE

PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Mounting Screw (2)
- (C) Threaded Rod (2)
- (D) Fixture Base (1)
- (E) Cap Nuts (2)
- (F) Lamp Shade (1)
- (G) Screws (4)

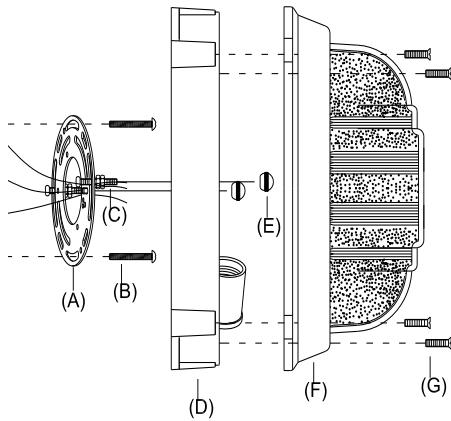

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to (1) 60-watt maximum Type A-15 bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

1. For a safe and secure installation, please ensure that the electrical box to which this fixture will be mounted is properly attached to a structural member of the building.
2. All wires are connected. When unpacking, be careful not to pull with wires as a bad connection may result.
3. Do not connect electricity until your fixture is fully assembled.
4. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug fixture and allow it to cool prior to replacing light bulb.
5. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.
6. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

TO ASSEMBLE:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!
2. Carefully remove all parts from the box and remove all plastic covering.
3. Remove lamp shade (F) from fixture base (D) by unscrewing screws (G).
4. Remove mounting plate (A) from fixture base (D) by unscrewing cap nuts (E).
5. Gently pull the wires from the wall outlet and allow the wires to hang. Thread the wires through the center hole in mounting plate (A).
6. Affix mounting plate (A) to the wall outlet box and secure with mounting screws (B). Ensure that threaded rods (C) are level.
7. Connect ground wire from the light fixture (green) to ground wire from wall outlet box (usually green or copper in color). Fasten together with a plastic wire connector provided and tightly wrap the wire connector with electrical tape so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
8. Connect the neutral wire (white) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
9. Repeat the procedure with the hot (black) wire to hot (usually black) outlet wire. Always make sure that no wire strands are left outside of the connections. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
10. Tuck these wire connections neatly into the ceiling outlet box.
11. Attach fixture base (D) to the mounting plate (A), letting rods (C) on mounting plate (A) pass through the holes of fixture base (D).
12. Screw cap nuts (E) onto the exposed rods to secure fixture base (D) to the wall.
13. Insert the recommended bulb into the sockets.
14. Attach lamp shade (F) to fixture base (D), secure with screws (G).
15. Restore power to the junction box and test the pendant fixture.
16. Assembly is complete.

CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.