

RESTORATION HARDWARE

20th C. FACTORY FILAMENT FLUSHMOUNT

PARTS ENCLOSED

- (A) Phillips Screws (2)
- (B) Mounting Plate (1)
- (C) Mounting Screws (2)
- (D) Fixture Base (1)
- (E) Cap Nuts (2)
- (F) Shade Holder (1)
- (G) Thumbscrews (3)
- (H) Threaded Collar (1)
- (J) Light Bulb (1)

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to one (1) 40-Watt maximum Type A bulb (J) (included) OR (1) 13W Compact Fluorescent bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:


1. All wires are connected.
2. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
3. Do not connect electricity until your lamp is fully assembled.
4. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.
5. Do not touch bulb when fixture is turned on or look directly at lit bulb.
6. Keep flammable materials away from lit bulb.
7. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture

TO ASSEMBLE:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!
2. Remove mounting plate (B) from fixture base (D) by unscrewing cap nuts (E) in counter-clockwise direction.
3. Gently pull the wire from wall outlet box and allow the wire to hang. Thread the wire through the center hole in mounting plate (B).
4. Attach the fixture ground wire and house ground wire (usually green or bare wire) to ceiling outlet box with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
5. Connect the neutral wire (white wire) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
6. Connect the hot wire (black wire) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
7. Attach mounting plate (B) to wall outlet box by aligning the holes and secure with mounting screws (C).
8. Attach the fixture base (D) to mounting plate (B), letting the Phillips screws (A) pass through the holes on fixture base (D) and secure with base screws (D).
9. Loosen the thumbscrews (G), insert lamp shade into shade holder (F) and secure with thumbscrews (G).
10. SHADE ASSEMBLY: (All shades are not included)
Shade Option (I): When you using the shade (1), (2), (3), (4), (5) or (6) loosen thumbscrews (G) from shade holder (F), place shade (1), (2), (3), (4), (5) or (6) to shade holder (F) and secure with thumbscrews (G).
Shade Option (II): If you want to use the shade (7), remove threaded collar (H), place shade cap and shade (7) to shade holder (F) and secure with threaded ring provide. (Keep the threaded collar (H) in case of changing back to Option (I) to use the other shades).
11. Insert the recommended bulb into socket.
12. Restore power to outlet box and check operation of fixture.
13. Assembly is complete.

CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap and water

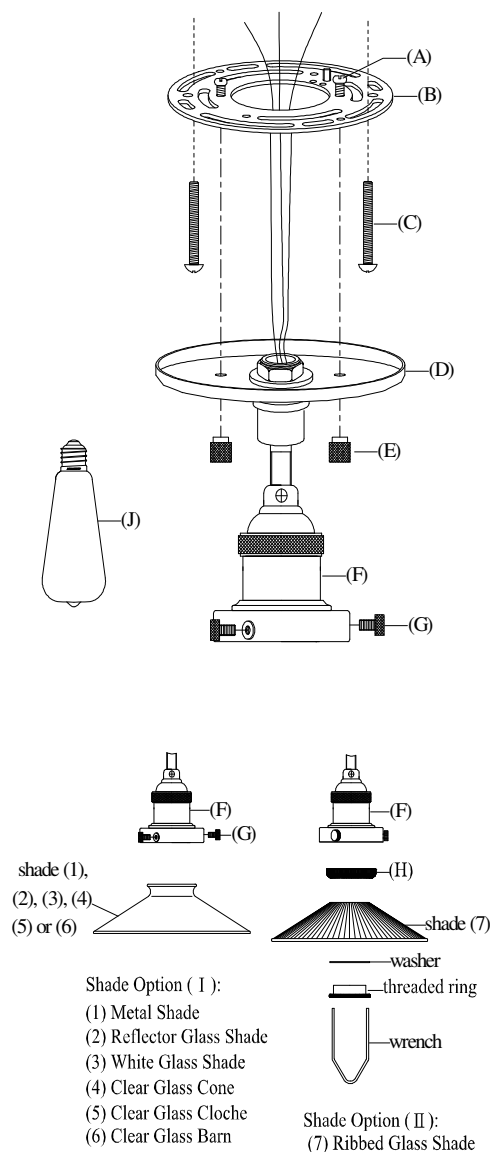

RESTORATION HARDWARE

FILAMENT FLUSHMOUNT

mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.