









# RESTORATION HARDWARE

Thank you for purchasing Restoration Hardware Lighting. Our assortment is crafted with the highest quality details in mind and each collection is clad in one of our signature finish options. Each item's surface is sealed which eliminates the need for polishing and ensures the lasting brilliance of your piece for years to come.

## PARTS:

ITEM	DIAGRAM	DESCRIPTION	QTY.
(A)		OUTLET BOX (not included)	
(B)		NIPPLE	1
(C)		CIRCLE CROSS BAR	1
(D)		LOCK WASHER	1
(E)		MOUNTING SCREWS	2
(F)		LOOP	1
(G)		KNURLED KNOBS	2
(H)		CANOPY	1

## IMPORTANT SAFETY INSTRUCTIONS:

These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.

Turn off electricity at the main circuit breaker panel before beginning installation.

This direct wire fixture must be installed by a certified and licensed electrician. Customer should not attempt to install.


This fixture has been rated for up to one (1) 60W candelabra base bulb per socket. To avoid risk of fire, do not exceed the recommended wattage.

If any special control devices are used with this fixture, follow the instructions carefully to assure full compliance with the N.E.C. requirements. If there are any questions, contact a licensed electrical contractor.

## BARCELONA IRON 15" PENDANT

## INSTRUCTIONS:

1. Shut off electrical supply at main fuse box / circuit breaker. A licensed electrician should install this fixture.
2. Attach circle cross bar (C) to ceiling outlet box using mounting screws (E) provided.
3. Pull wires from ceiling outlet box and make proper electrical connections described in steps 7 - 9.
4. Push canopy (H) up to circle cross bar (C) so that the mounting screws thread through the holes, and screw the knurled knobs (G) on the mounting screws until the canopy (H) is snug against the ceiling.
5. Attach ground wire from fixture to ground wire from outlet box.
6. Attach hot wire from fixture to hot wire from outlet box.
7. Attach neutral wire from fixture to neutral wire from outlet box.
8. Insert four max 60W bulbs into the sockets.

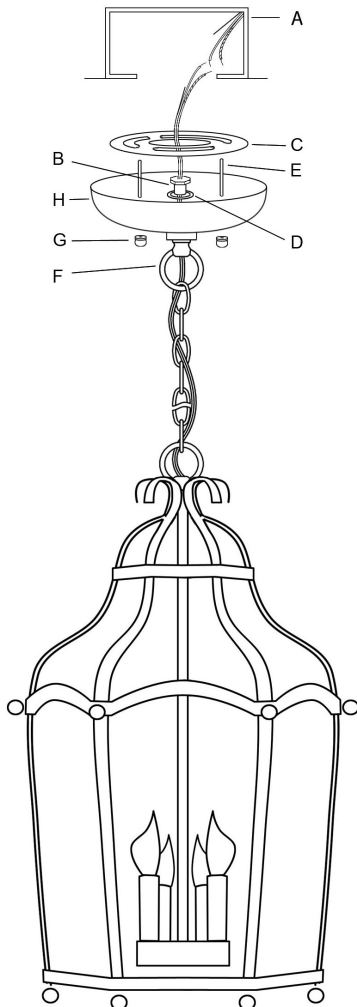

## CARE INSTRUCTIONS:

To clean, use a soft cloth only. Do not use any chemical or abrasive cleaners.