


RESTORATION HARDWARE

17th C. FLEMISH LINEAR PENDANT

PARTS ENCLOSED

- (A) Thread Pipe (1)
- (C) Center Tube (1)
- (D) Top Loop (1)
- (E) Ceiling Loop (1)
- (F) Lock Collar (1)
- (G) Canopy (1)
- (H) Crossbar (1)
- (J) Mounting Screws (2)
- (K) Wire Nut (2)
- (L) Shades (2)

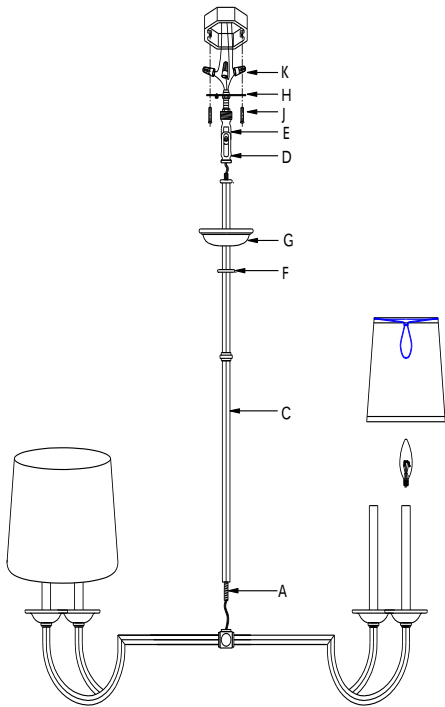

CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to four (4) 60-watt maximum E12 Type B candelabra bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. Do not connect electricity until your lamp is fully assembled.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.
4. Do not touch bulb when fixture is turned on or look directly at lit bulb.
5. Keep flammable materials away from lit bulb.
6. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

TO ASSEMBLE:

1. **SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!**
2. Carefully remove all parts from the box and remove all plastic covering.
3. Insert the threaded pipe (A) with a nut on bottom into the fixture assembly and tighten.
4. Slip the center tube (C) down the threaded pipe (A).
5. Thread top loop (D) onto top of threaded pipe (A) and tighten.
6. Slide the lock collar (F) and the canopy (G) down the center tube (C), and allow them to rest on the fixture body.
7. Install the crossbar (H) with attached ceiling loop (E) to outlet box by using mounting screws (J) provided.
8. Connect top loop (D) to ceiling loop (E) and allow fixture to hang.
9. Unwrap the wiring from the top of the fixture assembly.
10. Twist all of the wires together and push through the center hole in the ceiling loop (E). Pull the wires back out of the ceiling box and allow them to hang.
11. Carefully inspect the lantern's two fixture wires. One has very fine ridges molded into the plastic covering – this is the NEUTRAL WIRE. The second wire's covering is smooth – this is the HOT WIRE. The bare wire is the GROUND WIRE
12. Connect the GROUND WIRE from the fixture with the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the GROUND WIRE from the fixture to the green grounding screw inside of the outlet box. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
13. Connect the NEUTRAL WIRE from your fixture with the Neutral wire (usually white) from your ceiling box using a wire nut.
14. Connect the HOT WIRE from your fixture with the Hot wire (usually black) from your outlet box using a wire nut.
15. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
16. Wrap each connection individually with electrical tape.
17. Neatly tuck the connections into the outlet box.
18. Install the canopy (H) and secure with the lock collar (F).
19. Install light bulbs (not included) into each socket.
20. Clip shades (L) on bulbs.
21. Restore power and enjoy your new chandelier.