RESTORATION HARDWARE

WINE BARREL 2-TIER CHANDELIER

PARTS REQUIRED:

- (A) Wooden beam (not included)
- (B) Wooden ceiling mounting hardware x 1
- (C) Mounting bolts & nuts (not included)
- (D) Wire nuts x 3
- (E) Small quick link x 1
- (H) Large quick link x 2

Chain


Chandelier

Candle Sleeve x 12

ASSEMBLED:

(F2) Collar w. two hang straights (F1) x 1

(G1) Canopy

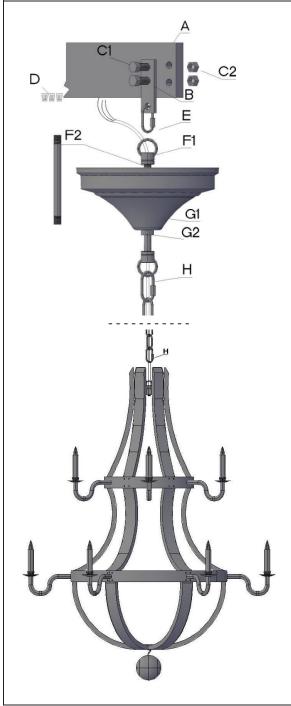

IMPORTANT SAFETY INSTRUCTIONS:

- These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of the fixture.
- Use authorized and certified electrician for consultation and installation.
- For your safety, it is strongly recommended, that two people hang the lighting fixture
- Turn off electricity at the main circuit breaker panel before beginning installation.
- This direct wire fixture must be installed by a certified and licensed electrician.
 Customer should not attempt to install.
- This fixture has been rated for up to twelve (12) 60W max, type B, candelabra base bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.
- The ceiling must have at least the capacity of five times the weight of the ceiling light. For this light a ceiling capacity of at least 355 lbs is required.
- Mounting bolts and nuts are not included. To select the proper type of mounting bolts based on the specs of the wooden joists in the ceiling, please contact your local hardware store for assistance.

WARNINGS:

- All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
- Do not use the light if the cable / cord is damaged.
- To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.
- Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.
- Keep flammable materials away from lit bulb.
- Keep away from children.

TO ASSEMBLE:

- 1. Shut off electrical supply at main fuse box/circuit breaker.
- 2. Carefully remove all parts from the box.
- 3. Detach the wooden ball by cutting the plastic band.
- Use one (1) large quick link (H) to attach the chain to the loop at the top of the mounting fixture.
- 5. Use one (1) large quick link (H) to attach the chain to the hang straight (F1) at the bottom of collar (F2).
- 6. Pull the power cord through the collar (F2).
- 7. Attach the wooden ceiling mounting hardware (B) to the wooden beam (A) using mounting bolts and nuts (C) proper for the beam material.
- 8. Use one small quick link (E) to attach the hang straight (F1) at the upper end of collar (F2) to the ceiling mounting hardware (B).
- Pull wires from ceiling outlet box and make proper electrical connections described in steps 10 – 12 by fastening proper wires together with wire nuts (D), as shown in the picture below. Tightly wrap connection with electrical tape (not provided):



- Attach ground wire from fixture to ground wire from outlet box. Fasten wires together with wire nut (D) and tightly wrap connection with electrical tape (not provided).
- 11. Attach hot wire from fixture to hot wire from outlet box. Fasten wires together with wire nut (D) and tightly wrap connection with electrical tape (not provided).
- Attach neutral wire from fixture to neutral wire from outlet box. Fasten wires together with wire nut (D) and tightly wrap connection with electrical tape (not provided).
- 13. Lift canopy (G1) up and hold it flush against the ceiling. Fasten the bolt (G2) to secure canopy against the ceiling.
- 14. Put twelve candle sleeves over the sockets.
- Insert twelve 60W max, type B, candelabra base bulbs (not provided) into the sockets.
- 16. Attach the wooden ball to the bottom band.
- 17. Restore power to the ceiling outlet box and test fixture.
- 18. Assembly is complete.

CARE INSTRUCTIONS:

Make sure that the power is turned off and bulbs have cooled before handling. To clean, use a soft cloth only. Do not use any chemical or abrasive cleaners.