


RESTORATION HARDWARE

Thank you for purchasing Restoration Hardware Lighting. Our assortment is crafted with the highest quality details in mind and each collection is clad in one of our signature finish options. Each item's surface is sealed which eliminates the need for polishing and ensures the lasting brilliance of your piece for years to come.

PARTS ENCLOSED

- (A) Chandelier assembly (1)
- (B) Chain (1)
- (C) Canopy Ring (1)
- (D) Chain Mounting Loop (1)
- (E) Canopy (1)
- (F) Nipple (1)
- (G) Top Column(1)
- (H) Bottom Column(1)

PARISIAN WOOD & ZINC CHANDELIER 47"

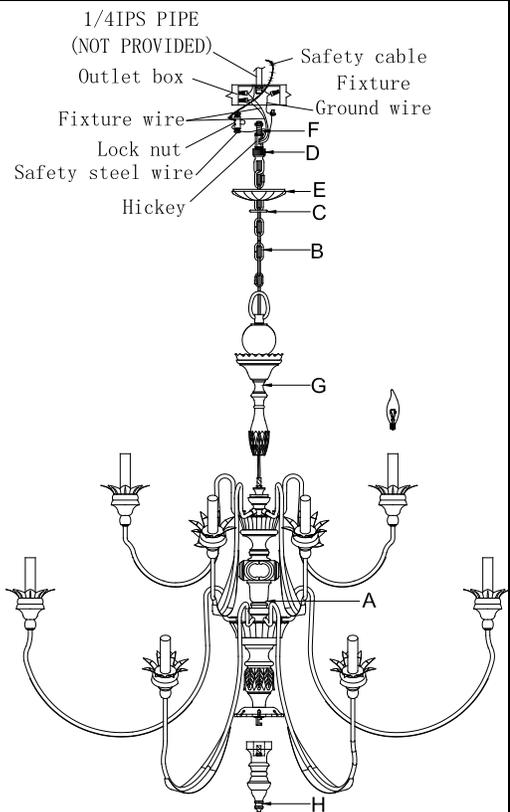

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to fifteen (15) 60-watt maximum Type C bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

1. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.
2. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
3. Do not connect electricity until your lamp is fully assembled.
4. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing light bulb.
5. Do not touch bulb when fixture is turned on or look directly at lit bulb.
6. Keep flammable materials away from lit bulb.

IMPORTANT: For a safe and secure installation, please ensure that the electrical box to which this fixture will be mounted is properly attached to a structural member of the building.

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF the breaker to the junction box where the pendant will be installed.
3. Thread the top column (G) on chandelier assembly (A).
4. Attach chain (B) to top loop of top column (G) by opening/closing the end link of chain.
5. Unscrew canopy ring (C), slip canopy ring (C) and canopy (E) onto chain.
6. Feed wire through chain (B), canopy ring (C), canopy (E), and mounting loop (D).
7. Insert top threaded nipple (F) into 1/4" IPS pipe attached to a structural member of the building.
8. Wrap both fixture safety cable and ceiling safety cable to lock nut and secure with nuts as shown.
9. Attach the fixture ground wire and house ground wire (usually green or bare wire) to ceiling outlet box with the green grounding screw.
10. Connect the hot wire (smooth wire) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape.
11. Connect the neutral wire (molded ridged wire) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
12. Tuck these wire connections neatly into the ceiling outlet box.
13. Raise the canopy (E) to the ceiling and screw canopy ring (C) onto the mounting loop (D) to secure.
14. Thread the bottom column (H) onto the bottom part of chandelier assembly (A).
15. Insert the recommended 60-watt Type C bulbs into the threaded sockets.
16. Restore power to the junction box and test the pendant fixture.

CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.