


# RESTORATION HARDWARE

## VITTI MIRRORED ROUND 7-RING CHANDELIER - ANTIQUE MIRROR

### PARTS ENCLOSED

ITEMS	DIAGRAM	DESCRIPTION	QTY.
(A)		Ceiling Plate	1
(B)		Canopy	1
(C)		Screw+ spare	6+4
(D)		Tapping Screw	4
(E)		Anchors+ spare	6+4
(F)		Collar	1
(G)		Chain	1
(H)		Bulb Fixture	1
(I)		TYPE-A Bulb	4
		(Not included)	
(J)		Body-1	1
(K)		Body-2	1
(L)		Body-3	1
(M)		Body-4	1
(N)		Body-5	1
(O)		Body-6	1
(P)		Body-7	1
(Q)		Plastic Cap	2

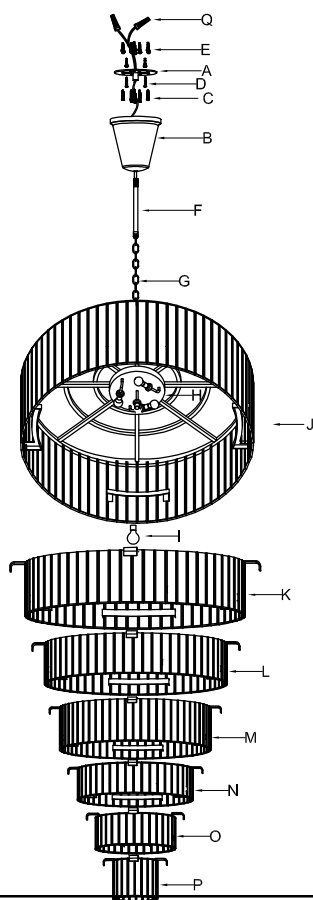

### IMPORTANT SAFETY INSTRUCTION:

1. Use an authorized and certified electrician for consultation and installation. Electrician must be familiar with commercial-type applications of very heavy chandeliers.
2. This fixture has been rated for 4 x 60-Watt maximum E26 standard bulb.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The ceiling must have at least the capacity of 5 times the weight of the ceiling light. For this light at least a ceiling capacity of 280 kgs. is required.
5. The manufacturer and distributor accept no liability for incorrect installation.
6. For indoor use only.
7. Keep away from children.

### WARNINGS:

1. Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
3. Deviation from instructions may result in a risk of fire or electric shock. Please read all instructions completely before starting installation.
4. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and/or other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

### TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the ceiling light will be installed.
3. Loosen the collar (F) from canopy (B) and ceiling plate (A).
4. Drill 10 holes on the ceiling corresponding with counter holes and slot holes in ceiling plate (A) then knock the screw anchors (E) into the holes. Attach the ceiling plate (A) to the ceiling with screws (C) and self-tapping screws (D).  
Note: Anchors are used for concrete ceiling, for wooden ceiling only screws can be used.
5. connect the ground wire from the fixture (H) (attached with body-1 (J) ) passing through the canopy (B) to ground junction box wire (not included). Then cover the wires with the plastic caps (Q).
6. Tighten the collar (F) (passing through the canopy (B) to the ceiling plate (A)).
7. Insert 4 Type A bulbs (I) (not included) into the socket. Do not exceed specified wattage.
8. Hang the Body-2 (K) on the Body-1 (J) as shown in image. Then hang the Body-3 (L) on Body-2 (K) and follow the same procedure to hang rest of the body parts (M), (N), (O) and (P).
9. Restore power to the junction box and test ceiling light fixture.

### CARE INSTRUCTIONS:

1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth / static duster. Do not use corrosive cleaners.