

UNIVERSAL

USHR15

Universal Recessed 15" Round Rain Showerhead with Circular Spray Pattern



SHOWN IN UNIVERSAL RECESSED 15" ROUND RAIN SHOWERHEAD WITH CIRCULAR SPRAY PATTERN | USHR15

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Spray
Fittings Hole Diameter: 12"
Inlet Connection Size: 1/2"
Inlet Connection Type: Female Hose
Pivot: N
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

USHR15X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Made of Brass

15" ceiling mounted rain showerhead

176 easy clean rubber nozzles prevent calcium buildup

Stocked in Brass, Chrome, Nickel and Matte Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)


UNIVERSAL

USHR15


Universal Recessed 15" Round Rain Showerhead with
Circular Spray Pattern

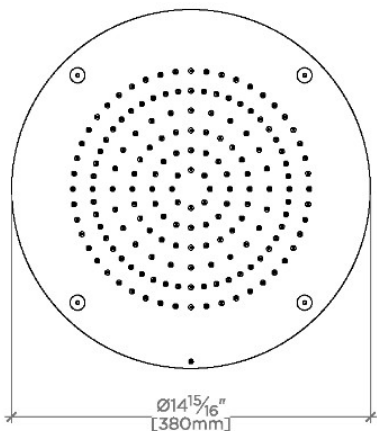


CEILING VIEW SCALE: $\frac{1}{2}''=1'-0''$

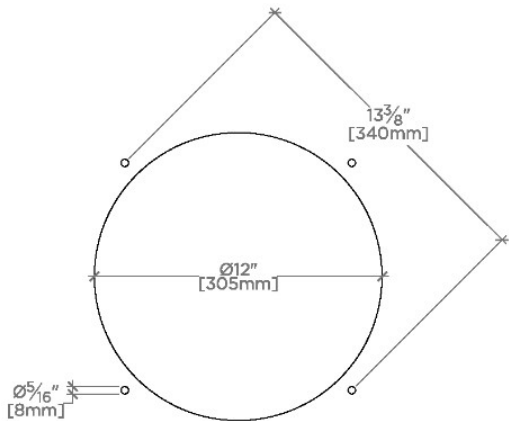

CUTOUT VIEW SCALE: $\frac{1}{2}''=1'-0''$

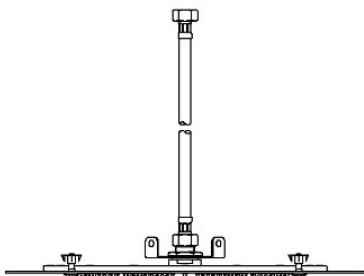

FRONT VIEW SCALE: $\frac{1}{2}''=1'-0''$

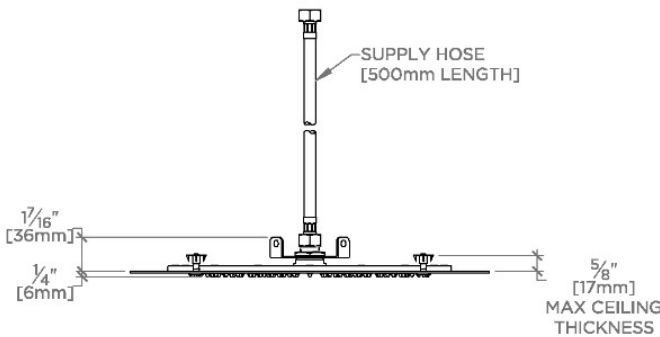

SIDE VIEW SCALE: $\frac{1}{2}''=1'-0''$