

## BOULE DE CRISTAL ROUND CHANDELIER 72"


### PARTS ENCLOSED

- (A) Mounting Strap (1)
- (B) Nipple (1)
- (C) Canopy (1)
- (D) Mounting Loops (6)
- (E) Canopy Rings (2)
- (F) Hanging Loop (1)
- (G) 18" Connection Rods (2)
- (H) 12" Connection Rods (2)
- (J) 6" Connection Rods (2)
- (K) Connective Rods (5)
- (L) Sockets (18)
- (M) Glass Shades (18)
- (N) Bulbs (18)

### SAFETY CABLE

#### ASSEMBLY

1. Join fixture safety cable with safety cable from ceiling.
2. Wrap both safety cables around the cable lock nut.
3. Secure by tightening both hex nuts.

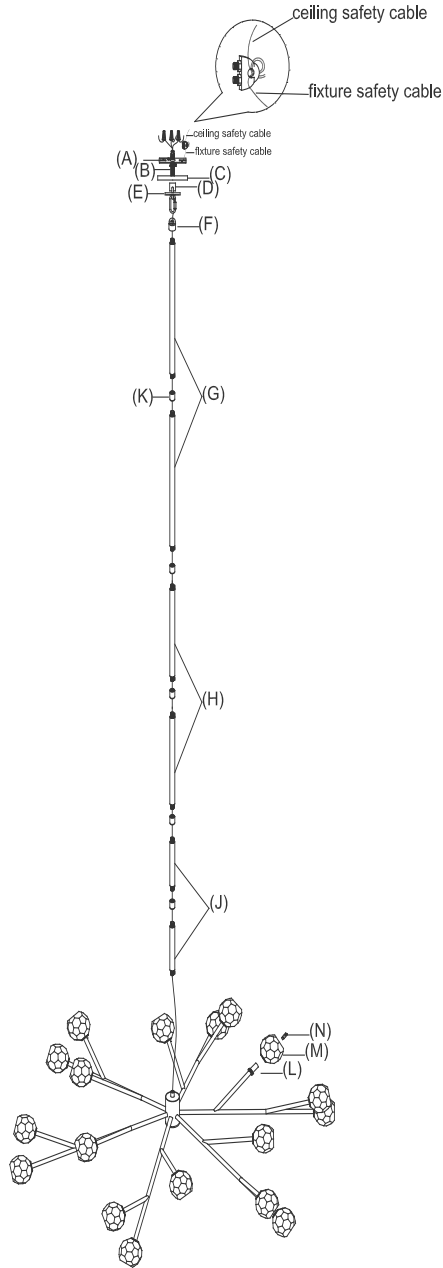

## BOULE DE CRISTAL ROUND CHANDELIER 72"

**IMPORTANT SAFETY INSTRUCTIONS**

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for eighteen (18) 20-Watt TYPE T4 bulbs (included) and is dimmer switch compatible. To avoid the risk of fire, do not exceed the recommended wattage. To avoid damages to socket or bulb, remove crystal shade from threaded section of the socket prior to changing bulb.

**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.**



**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

**ASSEMBLY & INSTALLATION**

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

- Carefully remove all parts from the box and remove all plastic covering.
- Determine the hanging length of chandelier. Connect light fixture to some or all Connection Rods (G)(H)(J) and Connective Tubes (K) according to the height needed.
- Thread Hanging Loop (F) onto the inner connection rod of the top cord cover.

**ASSEMBLY & INSTALLATION CONT.**

- Hook Hanging Loop (F) to the closable link on Mounting Loop (D).
- Unscrewing Canopy Ring (E), slide Canopy Ring (E) and Canopy (C) on closable link on Mounting Loop (D).
- Attach Mounting Strap (A) to ceiling and secure with mounting screws (not included) and proper fasteners from your local hardware store.
- Insert Nipple (B) into the center hole of Mounting Strap (A).
- Attach Mounting Loop (D) to Nipple (B).
- Feed wires through the Connection Rods, Hanging Loop (F), Mounting Loop (D), and Canopy (C).
- Connect the safety steel wire from the fixture and the safety cable from ceiling. Refer to the illustration.
- Carefully inspect the chandelier's two fixture wires. One has very fine ridges molded into the plastic covering – this is the neutral wire. The second wire's covering is smooth – this is the hot wire. The bare wire is the ground wire.
- Connect the ground wire from the fixture with the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have a ground wire, then attach the ground wire from the fixture to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
- Connect the neutral wire from your fixture with the neutral wire (usually white) from your ceiling box using a wire nut.
- Connect the hot wire from your fixture with the hot wire (usually black) from your outlet box using a wire nut. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
- Attach Canopy (C) with light fixture to affixed Mounting Strap (A) and secure with Canopy Ring (E).
- Insert Bulbs (N) into the Sockets (L).
- Thread Glass Shades (M) onto the threaded section of Sockets (L).
- Assembly is complete.

**CARE INSTRUCTIONS**

Do not use polishes or cleaners on your lamp. Just wipe clean with a soft cloth.