
PARTS ENCLOSED:

- (A) Mounting plugs (4)
- (B) Screws (4)
- (C) Wall plate (1)
- (D) Screw (2)
- (E) Lamp frame (1)
- (F) Nuts (2)
- (G) Glass (7)
- (H) Flat nuts (14)
- (I) Bulb (2)
- (J) Outlet screw (2)
- (K) Metal washer (2)
- (L) Wire cap (3)
- (H) Spare flat nuts (3)



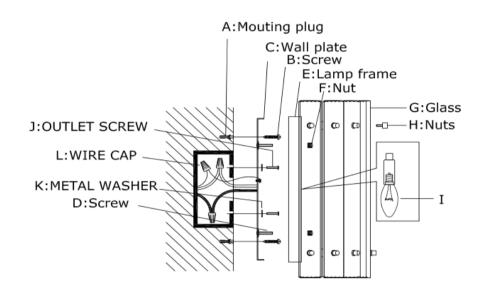

IMPORTANT INSTRUCTION:

- (1) Use an authorized and certified electrician for consultation and installation. The electrician must be familiar with commercial-type application of every wall lamp and the hazards involved. The electrician should install it as per the applicable installation code.
- (2) This fixture has been rated for 2x40-watt maximum E12, type B bulb.
- (3) To avoid the risk of fire, do not exceed the recommended wattage.
- (4) The manufacturer and distributor accept no liability for incorrect installation.
- (5) For indoor use only.
- (6) Keep away from children.

WARNINGS:

- (1) Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your wall lamp is fully assembled and installed.
- (2) All wires are connected. Do not remove the wall lamp from its packaging by pulling on the power cord, as a bad connection may result.
- (3) To reduce the risk of fire, electrical shock, or personal injury, always turn off the light and allow it to cool prior to replacing light bulb. Do not touch the bulbs when the fixture is turned on or look directly at the light bulbs. Keep flammable materials away from the light bulbs.
- (4) Deviation from instruction may result in a risk of fire or electric shock.

THIS IS NOT A TOY. THE PRODUCT HAS NO PLAY VALUE.

ASSEMBLY & INSTALLATION:

- (1) Carefully remove the parts from the carton and place them on a flat surface. Please make sure that you have all the parts indicated before you begin to assemble this item.
- (2) Take wall plate (C) to mark the hanging position in advance, use a pencil to make a symbol on the wall. Then drill 4 holes in the wall, the depth of the holes should match the size of the mounting plugs (A). Finallly, install 4 mounting plugs (A) into the wall.
- (3) Attach the screws (D) and metal washers (D) on the wall plate with the nuts (D).
- (4) Move the outlet screws (J) through the metal washer (K) and the round border holes of the wall plate. Then fixed the wall plate to the outbox with the outlet screws.
- (5) Use the 4 screws (B) to fix the wall plate to the wall tightly.
- (6) Connect the black wire to the black (positive) wire, the white wire to the white (neutral) wire and copper wire to the ground wire with the wire cap (I). Then secure wrapping with insulated rubber tape (not included).
- (7) Take the wall lamp frame (E) and match it with the holes of wall mounting plate. Then use the retaining nuts (F) to tighten it and fix it on the wall.
- (8) Install 2 40-Watt maximum Type B Candelabra incandescent light bulb (H) into the socket of the fixture. DO NOT EXCEED THE SPECIFIED WATTAGE.
- (9) Remove nuts (H) from lamp frame. Install 7 decoration glass (G) in the lamp frame with the nuts (H). The glass panels can be adjusted by loosening the nut and manoeuvering the glass up or down slightly, then re-tighten the nuts.

CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.

Wipe clean with a soft cloth.