
### **BONNINGTON 3-TIER CHANDELIER 24**"

RH

### PARTS ENCLOSED

- (A) Wire Nuts (3)
- (B) Threaded Nipple Pipe (1)
- (C) Ceiling Loop (1)
- (D) Canopy (1)
- (E) Lock Collar (1)
- (F) Carabiners (2)
- (G) Chain (1)
- (H) Top Ring (1)
- (I) Crystals (28 +2 extra)
- (J) Plastic Washers (112 +5 extra)
- (K) Ball Finials (112 +4 extra)
- (L) Stems (56 +4 extra)
- (M) Bulbs (12)

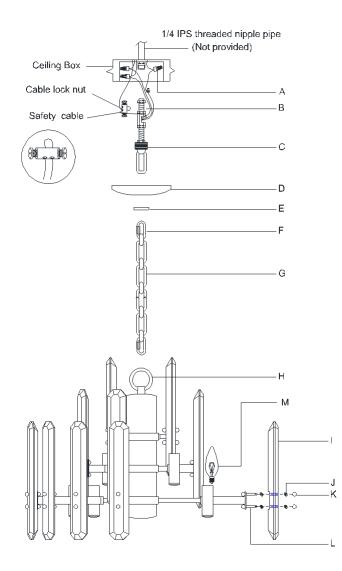

### IMPORTANT SAFETY INSTRUCTIONS

# INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to twelve (12) 40-Watt maximum Type B standard (candelabra) incandescent light bulbs (included) or twelve (12) 9-Watt compact fluorescent light bulbs (not included) or twelve (12) 5-Watt LED light bulbs (not included). To avoid the risk of fire, DO NOT EXCEED THE RECOMMENDED LAMP WATTAGE.

### WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.

WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.

### $\not$ warning: strangulation hazard

Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

### **ASSEMBLY & INSTALLATION**

## SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

- Install the Threaded Nipple (B) with hickey and nut into the ceiling box. You must provide a 1/4 IPS threaded nipple pipe (not provided) which will go through the top of ceiling box and through a structural member of building.
- 2. Attach Ceiling Loop (C) to the Threaded Nipple (B).
- Put Canopy (D) to Ceiling Loop (C), and secure with Lock Collar (E).

#### ASSEMBLY & INSTALLATION CONT.

- 4. Using the dimensions of the fixture as a guide, shorten the Chain (G) as needed using a pair of chain pliers.
- Unscrew the threaded collar on the Carabiner (F). Attach the chain to the Ceiling Loop (C). Close the threaded collar to secure the chain.
- Unscrew the threaded collar on the other Carabiner (F). Raise fixture body and attach Carabiner (F) to the Top Ring (H). Close the threaded collar to secure the fixture body.
- 7. Unwrap the wiring from the top of the fixture body. Weave the power supply cord and the ground wire through the Chain (G).
- When you reach the canopy and ceiling loop, measure the wires and cut. Be certain to leave enough to connect inside the canopy.
- Twist the power supply and ground wires together and push through the center Loosen the Lock Collar (E) and let the Canopy (D) slip down the chain carefully.
- 10. Join fixture safety cable with safety cable from ceiling.
- 11. Wrap both safety cable around the cable lock nut.
- 12. Insert screws into both holes on cable lock nut and secure screws with screwdriver.
- 13. Push the cable lock nut into the ceiling box.
- 14. Connect the Ground (bare) fixture wire with the ground (usually bare) wire from the ceiling box using Wire Nut (A). If the house does not have ground wire, then attach this wire to the green grounding screw inside of outlet box.
- Connect the neutral (ribbed edge, no markings, or WHITE) fixture wire with the neutral (usually white) wire from the ceiling box using Wire Nut (A).
- Connect the hot (smooth edge, markings, or BLACK) fixture wire with the hot (usually black) wire from the outlet box using Wire Nut (A).
- 17. Tuck these wire connections neatly into the outlet box.
- 18. Install Bulbs (M) into each socket.
- Attach the Crystal (I) to the Stems (L) and secure with Plastic Washers (J) and Ball Finials (K).
- 20. Installation is complete.

### CARE INSTRUCTIONS

Do not use polishes or cleaners on your lamp. Just wipe clean with a soft cloth.